


Unit Features	 Three - Piece Fiberglass Composite Construction Sanitary Grade Polyester Gelcoat Surface Front-Side Installation With Minimal Sealant Requirements 2" Dia. End Drain 2-1/2" Dia. Overflow Apron Drip Ledge Minimizes Water Migration Corner Accessory Ledge Generous, Multi-Level Back Wall Shelving Wall Design Accommodates Grab Bar Applications Textured Floor Pattern 1/2-inch Balsa Wood Core Floor Structure
Special Notes	 Optional ABF Model (provides 3-inches of drain clearance) UL Listed Whirlpool System Available 'QwikClic' Technology (Patents Pending) Factory Applied Reinforcement Packages Available Factory Applied Bar Configurations Available Factory Applied ADA & ANSI Compliant Bar & Seat Packages Available

Uasis

Order No.:TS3P-6032R (RH drain / 16" apron) TS3P-6032L (LH drain / 16" apron)

Order No.:TS3P-6032R ABF (RH drain / 17-1/4" apron) TS3P-6032L ABF (LH drain / 17-1/4" apron)


60" x 32", 3-piece gelcoated fiberglass tub/shower with 'QuikClic', front side installation, 16" apron (1-3/4" drain clearance) multilevel back wall shelves, corner accessory ledge, contoured neck rest, and drain on end indicated.

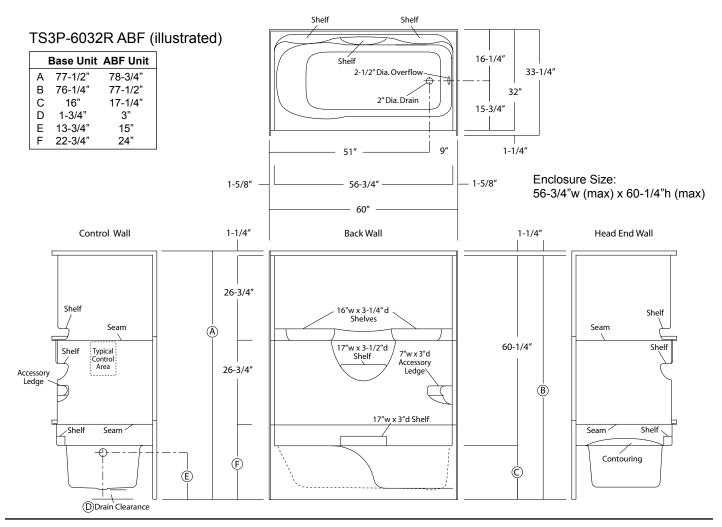

Package Order No.: 6P (Builder System)

Package includes: 6-Adjustable jets, twin air injection controls, pneumatic on/off control, and 5.50 amp pump/motor.

Options: In-Line Heater (1*) Ozone Generator (1*) SS Shower Rod (1*) (order: ILH) (order: OZG) (order: ADD/SHWR ROD-TS) Notes: (1*) Factory installed options System available with component packages.




Sump Dimensions:51" long x 22" wide x 13-1/4" deepSump Capacity:42 gal. (unoccupied - to overflow)Whirlpool Operating:36 gal.



ActivLife

Package Order No.: FH (Fair Housing wall reinforcement)


Package Includes: Factory applied, HUD-FHA compliant (Fair Housing), structurally reinforced wall areas (as shown) for independent field application of bars.

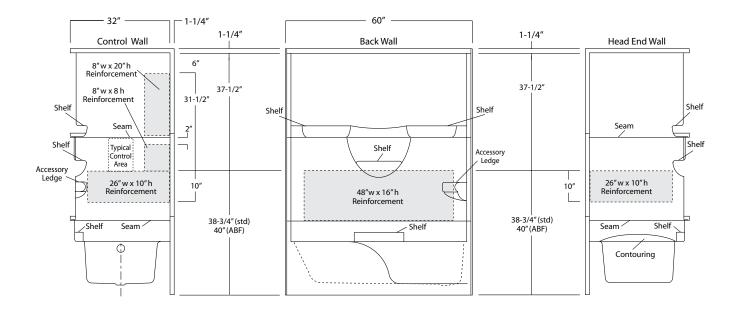

Package Order No.: 3SM (3-side, mid-level wall reinforcement)

ActivLife

Package Includes: Factory applied, 3-side, mid-level, structurally reinforced wall areas (as shown), exceeding 'Fair Housing' (HUD/FHA) requirements, for independent field application of bars. NOTE: Factory installed component packages available with listed reinforcement.

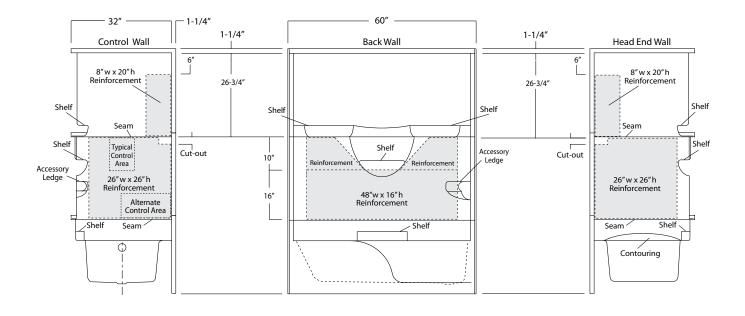




Package Order No.: 3SF (3-side, full-wall reinforcement)

ActivLife

ActivLife

Package Includes: Factory applied, 3-side, full-wrap, structurally reinforced wall areas (as shown), exceeding 'Fair Housing' (HUD/FHA) requirements, for independent field application of bars.


NOTE: Factory installed component packages available with listed reinforcement.

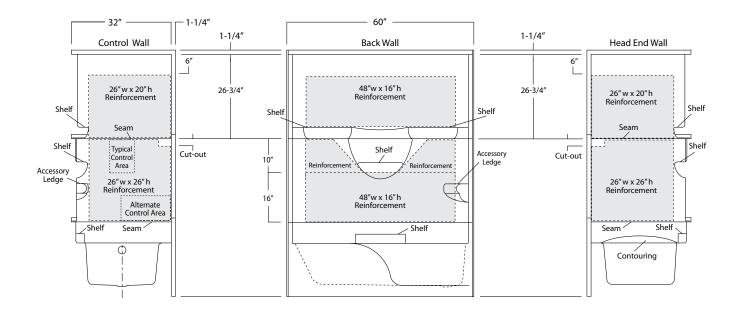

Package Order No.:BP1-60 (2-bar only package)Upgrade Package No.:BP1-60 WHT (1-1/4" dia., white powder coat, 2-bar only package)BP1-60 OFW (1-1/4" dia., off-white powder coat, 2-bar only package)BP1-60 SNK (1-1/4" dia., satin nickel, 2-bar only package)

Package Includes: Factory installed, 1-1/2" dia. stainless steel, 2-bar package with basic reinforcement for components (as shown). NOTES: Enhanced reinforcement available with listed component package.

Positioning of factory installed components allow for the installation of a shower enclosure.

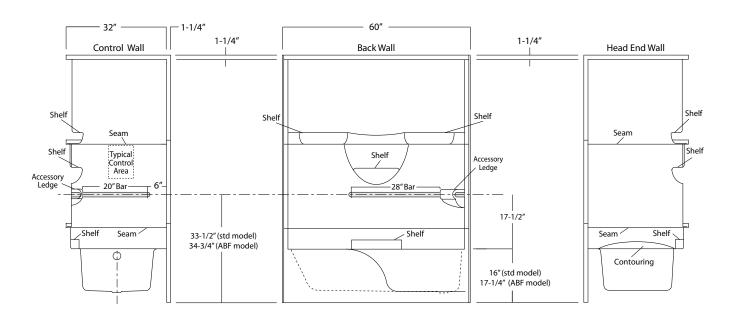




ActivLife

ActivLife

Package Order No.:BP2-60 (3-bar only package)Upgrade Package No.:BP2-60 WHT (1-1/4" dia., white powder coat, 3-bar only package)BP2-60 OFW (1-1/4" dia., off-white powder coat, 3-bar only package)BP2-60 SNK (1-1/4" dia., satin nickel, 3-bar only package)

Package Includes: Factory installed, 1-1/2" dia. stainless steel, 3-bar package with basic reinforcement for components (as shown). NOTES: Enhanced reinforcement available with listed component package.

Positioning of factory installed components allow for the installation of a shower enclosure.

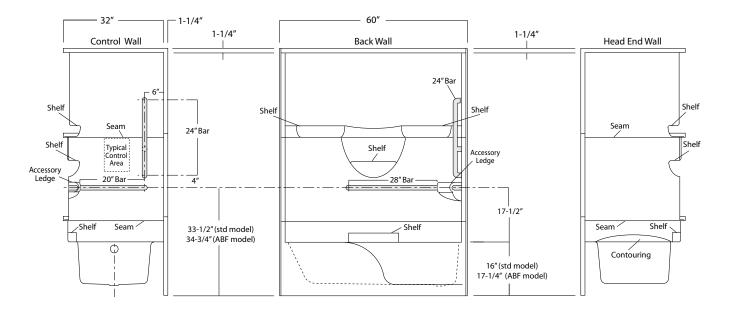


Package Order No.:4BAR (4-bar only package)Upgrade Package No.:4BAR WHT (1-1/4" dia., white powder coat, 4-bar only package)4BAR OFW (1-1/4" dia., off-white powder coat, 4-bar only package)4BAR SNK (1-1/4" dia., satin nickel, 4-bar only package)

Package Includes: Factory installed, 1-1/2" dia. stainless steel, 4-bar package with basic reinforcement for components (as shown) (replicates ADA10 bar configuration less seat and shower rod).

NOTES: Enhanced reinforcement available with listed component package.

Positioning of factory installed components allow for the installation of a shower enclosure.

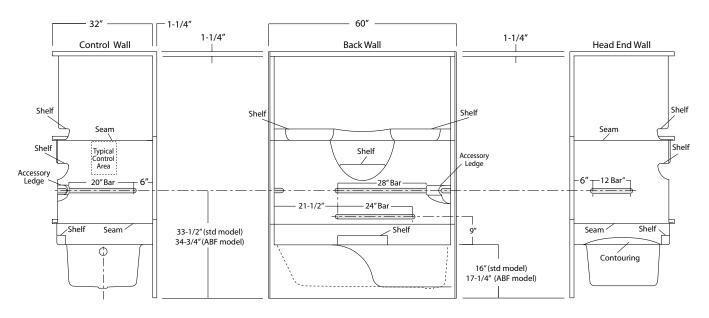




Package Order No.:5BAR (5-bar only package)Upgrade Package No.:5BAR WHT (1-1/4" dia., white powder coat, 5-bar only package)5BAR OFW (1-1/4" dia., off-white powder coat, 5-bar only package)5BAR SNK (1-1/4" dia., satin nickel, 5-bar only package)

ActivLife

Package Includes: Factory installed, 1-1/2" dia. stainless steel, 5-bar package with basic reinforcement for components (as shown) (replicates ANS17 bar configuration less seat and shower rod).

NOTES: Enhanced reinforcement available with listed component package.

Positioning of factory installed components allow for the installation of a shower enclosure.

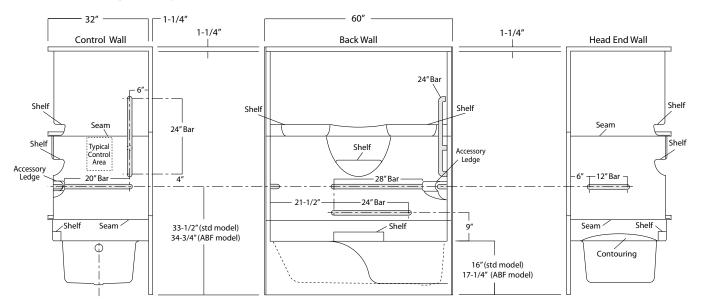

Package Order No.: ADA10-FLD (folding seat - 2010 ADA Standards compliant pkg) ADA10-REM (removable seat - 2010 ADA Standards compliant pkg)

Package Includes: Factory installed seat, 1-1/2" dia. stainless steel bars and shower curtain rod in compliance with 2004 ADA requirements.

NOTES: ADA10 is a 4-bar package. Check installation site regulations for compliance requirements.


Enhanced reinforcement available with listed component package.

Shower curtain rod may be deleted upon request without affecting compliance.

Use of ABF unit is required for seat height compliance.

Positioning of factory installed components prohibit the installation of a shower enclosure.

Optional, white, 150 denier fabric, bottom weighted shower curtain with integrated rings (#CRT-TS).

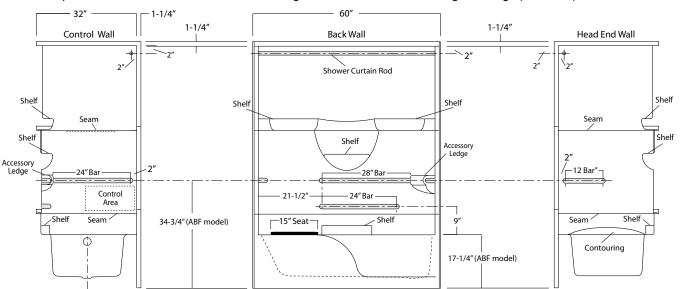



Package Order No.: ANS17-FLD (folding seat - ICC ANSI compliant pkg) ANS17-REM (removable seat - ICC ANSI compliant pkg)

Package Includes: Factory installed seat, 1-1/2" dia. stainless steel bars and shower curtain rod in compliance with ICC ANSI-A117.1-2017 requirements.

NOTES: ANS17 is a 5-bar package. Check installation site regulations for compliance requirements.

Enhanced reinforcement available with listed component package.

Shower curtain rod may be deleted upon request without affecting compliance.

Use of ABF unit is required for seat height compliance.

Positioning of factory installed components prohibit the installation of a shower enclosure.

Optional, white, 150 denier fabric, bottom weighted shower curtain with integrated rings (#CRT-TS).

