


Swivel Flush Mount w I-Bracket Installation: *(Please adhere to all local laws and building codes)* Model#: (QSW14000)

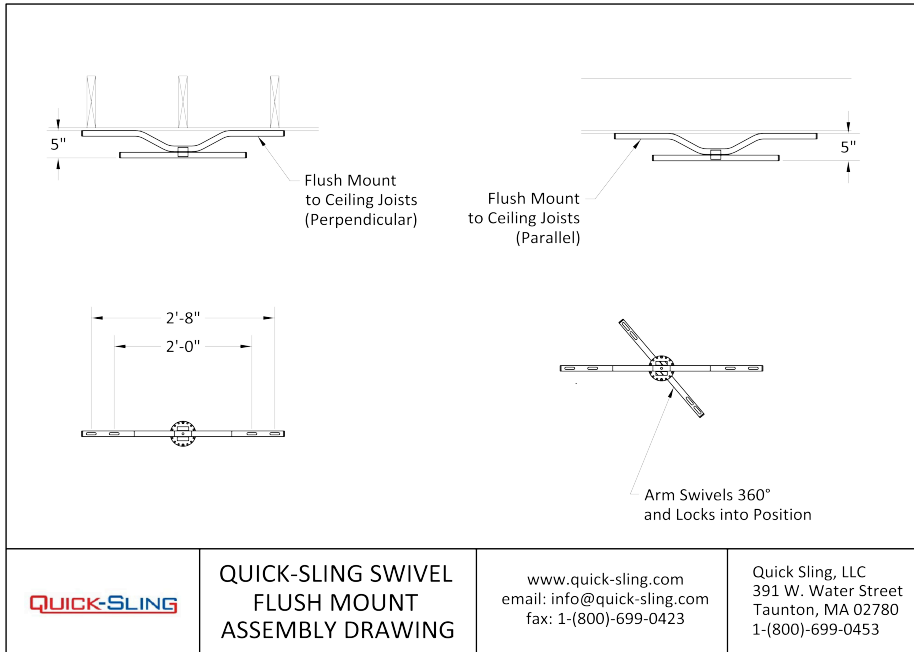

Step #1: Attach Swivel Spreader Arm (SW102) to the unit heater (*Blue Labeled Hardware Bag*). Insert 3/8" Hex Tap Bolts through top of SW102 using Flat Washers and Internal Tooth Lock Washers. *Please see Photo #2 for reference.*

Step #2: Slide the pre-assembled Circular Adjustment Plate (SW100) over the 3/8" Swivel Bolt on the Swivel Spreader Arm. Adj. Plate should sit flat on Spreader Arm with flaps on each side of Arm. *Temporarily remove 1/4"-20 Hex Tap Bolts, Lock Washers and Nylon Insert Nut from Circular Adjustment Plate (SW100).* *Please see Photo #1 for reference.*

Optional Install Method: Depending on conditions you may find that reversing Steps 3 & 4 are to your advantage.

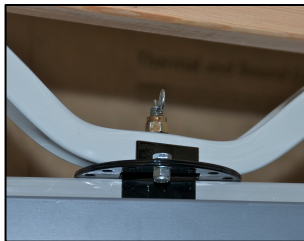



Photo #1
(On left) Close-up of Circular Adjustment Plate with locking hardware.



Photo #2
(On left) Spreader Arm and Circular Adjustment Plate attached to Unit Heater.



Photo #3
(On left) Flush Mount to Ceiling Joist with view of Spreader Arm connected to unit heater.

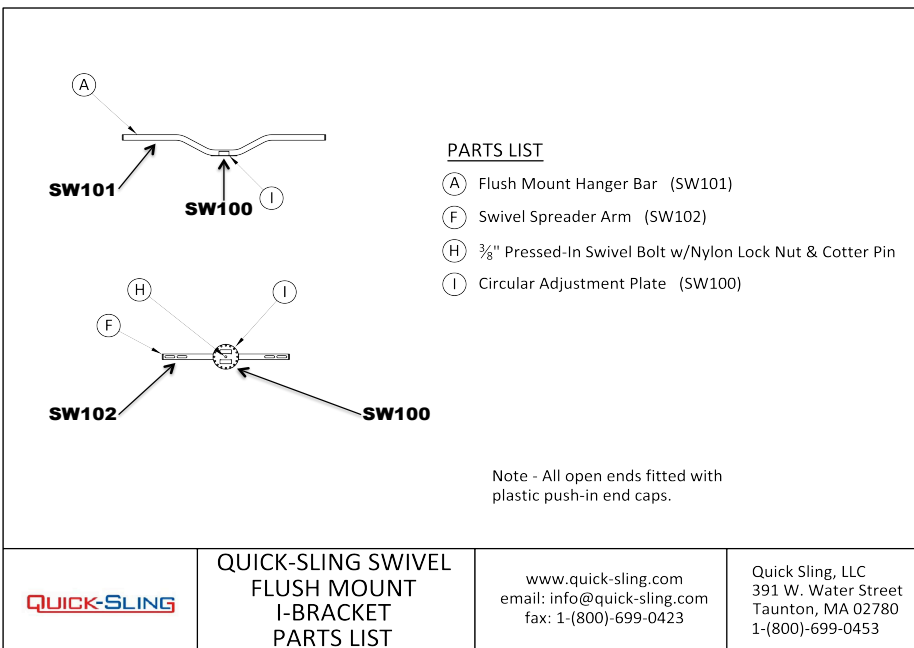

Step #3: Slide Flush Mount Bar (SW101) over the 3/8" Swivel Bolt. FM Bar should sit flat on Adjustment Plate with flaps coming up on each side. Attach with hardware (*Pink Labeled Bag*). Place Flat Washer on Swivel Bolt, followed by Lock Washer and Nylon Insert Lock Nut.

Once in place and tightened, you must install Safety Hitch Pin.

Step #4: Install in place with hardware (*Tan Labeled Bag*). Use one 3" Hex Lag Bolt, Split Lock Washer and Flat Washer on each side of FM Bar to attach securely. *Please see Photo #3 for reference.*

Reinstall 1/4"-20 Hex Tap Bolts, Lock Washers and Nylon Insert Lock Nuts to the Circular Adj. Plate to lock in place.

Please see important "Safe Install" information on back page.

Safe Install Warning

Install At Your Own Risk!

The load capacity of this product can only be assured if installation is carried out properly.

Mounting hardware is included with most models. However, it is the Buyer's sole responsibility to determine that the enclosed hardware is safe and suitable for the selected mounting location. Additional materials and safety precautions may be required, depending upon the size and location of the installation. When hardware is not included, the Buyer is solely responsible for furnishing and installing anchors and related mounting materials that are safe and suitable for the selected mounting location. Quick-Sling™ is not responsible for any installation faults or defects. It is highly recommended that the installation/mounting location be periodically inspected by a skilled technician. Make sure that the installation location is suitable enough to hold the brackets and associated equipment loads.

Disclaimer Of Liability

Quick-Sling LLC and its successors, distributors, jobbers, dealers and retailers ("Seller") shall in no way be responsible for any direct, indirect or consequential damage resulting from improper installation, misuse or misapplication of this product. It is the BUYER's sole responsibility for assuring proper installation and use.

Seller makes no warranty of merchantability of the goods or the fitness of the goods for any particular purpose. Seller makes no warranties of any kind, express or implied. The goods are sold as-is and with all faults.