


Swivel Flush Mount w H-Bracket Installation: *(Please adhere to all local laws and building codes)* Model#: (QSW13000)

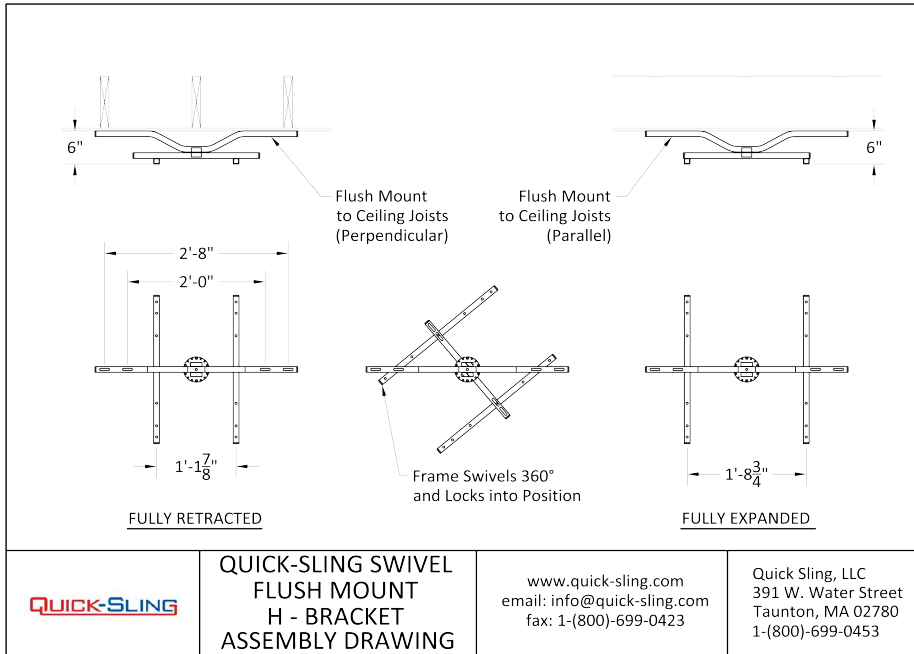

Step #1: Attach Connection Arms (SW103) to the unit heater (*Orange Labeled Hardware Bag*). Insert 5/16" Hex Tap Bolts through top of SW103; attach Flat Washers, Lock Washers and Nylon Insert Nuts.

Step #2: Place Spreader Arm (SW102) over the 2 pressed-in bolts of the Connection Arms; attach (*Yellow Labeled Hardware Bag*). Place Flat Washer and Nylon Insert Nut on pressed-in bolts. *Tighten and insert Safety Hitch Pins.*

Step #3: Slide the Circular Adjustment Plate (SW100) over the 3/8" Swivel Bolt. SW100 should sit flat on Spreader Arm with flaps on each side of Arm. *Temporarily remove 1/4"-20 Hex Tap Bolts, Lock Washers and Nylon Insert Nut from Circular Adjustment Plate (SW100).*





Photo #1
(On left)
Close-up of
Circular
Adjustment
Plate with
locking
hardware.



Photo #2
(On left)
H-Brackets,
Spreader Arm
and Circular
Adj. Plate
attached to
Unit Heater.



Photo #3
(On left)
Flush Mount
to Ceiling Joist
with view of H-
Brackets
connected to
unit heater.

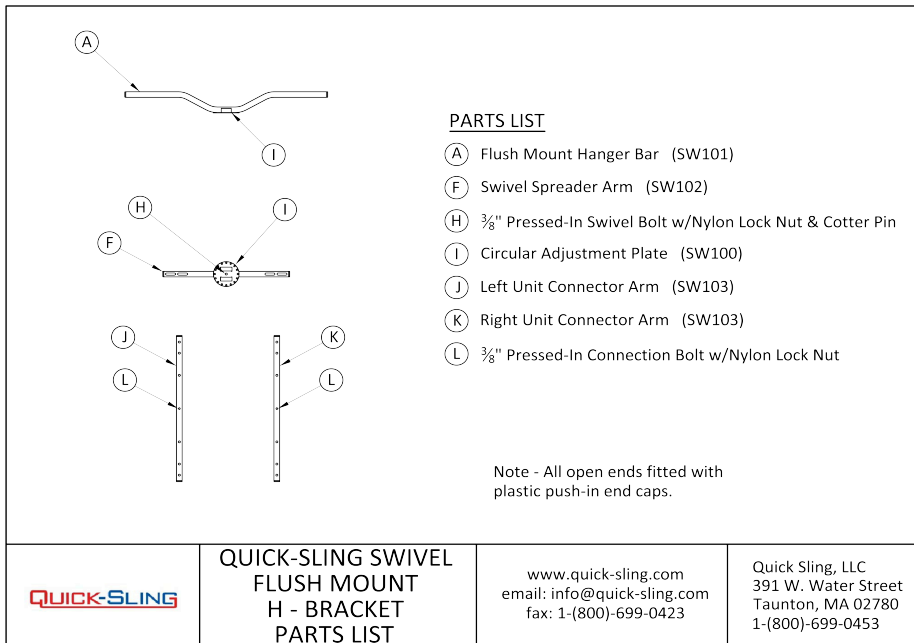

Step #4: Slide Flush Mount Bar (SW101) over the 3/8" Swivel Bolt. FM Bar should sit flat on Adjustment Plate with flaps coming up on each side. Attach with hardware (*Pink Labeled Bag*). Place Flat Washer on Swivel Bolt, followed by Lock Washer and Nylon Insert Lock Nut. *Once in place and tightened you must install Safety Hitch Pin.*

Step #5: Install in place (see Photo #3) with hardware (*Tan Labeled Bag*). Use one 3" Hex Lag Bolt, Split Lock Washer and Flat Washer on each side of FM Bar to attach securely. *Reinstall 1/4"-20 Hex Tap Bolts, Lock Washers and Nylon Insert Lock Nuts to the Circular Adj. Plate to lock in place.*

Optional Install Method: Depending on conditions you may find that reversing Steps 4 & 5 are to your advantage.

Safe Install Warning

Install At Your Own Risk!

The load capacity of this product can only be assured if installation is carried out properly.

Mounting hardware is included with most models. However, it is the Buyer's sole responsibility to determine that the enclosed hardware is safe and suitable for the selected mounting location. Additional materials and safety precautions may be required, depending upon the size and location of the installation. When hardware is not included, the Buyer is solely responsible for furnishing and installing anchors and related mounting materials that are safe and suitable for the selected mounting location. Quick-Sling™ is not responsible for any installation faults or defects. It is highly recommended that the installation/mounting location be periodically inspected by a skilled technician. Make sure that the installation location is suitable enough to hold the brackets and associated equipment loads.

Disclaimer Of Liability

Quick-Sling LLC and its successors, distributors, jobbers, dealers and retailers ("Seller") shall in no way be responsible for any direct, indirect or consequential damage resulting from improper installation, misuse or misapplication of this product. It is the BUYER's sole responsibility for assuring proper installation and use.

Seller makes no warranty of merchantability of the goods or the fitness of the goods for any particular purpose. Seller makes no warranties of any kind, express or implied. The goods are sold as-is and with all faults.