

Location:



Showerhead 352SH Specification Submittal



Feature Highlights

- Single mode, ball joint connection
- Standard flow rate is 2.0 gpm (7.6 L/min)
Optional lower flow rate restrictor available
- Polished Chrome finish (standard)

Model Numbers

- 352SH..... Showerhead

Standards / Certifications

- ASME A112.18.1/CSA B125.1
- WaterSense 2.0 gpm (7.6 L/min)
- 1.75 gpm (6.6 L/min)
- 1.5 gpm (5.7 L/min)



Options / Modifications

Append appropriate -suffix to model number

- CG -1.75** 1.75 gpm (6.6 L/min) flow rate restrictor
- CG -1.5** 1.5 gpm (5.7 L/min) flow rate restrictor
- BBZ** Brushed Bronze finish
- MB** Matte Black finish
- STN** Satin Nickel finish

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.

10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.




Architectural/Engineering Specification

Symmons Showerhead _____ Includes Single mode, ball joint connection, Standard flow rate is 2.0 gpm (7.6 L/min), Optional lower flow rate restrictor available, Polished Chrome finish (standard). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 2.0 gpm (7.6 L/min), WaterSense 1.75 gpm (6.6 L/min), WaterSense 1.5 gpm (5.7 L/min) compliant. Available options: "1.75 - 1.75 gpm (6.6 L/min) flow rate restrictor", "1.5 - 1.5 gpm (5.7 L/min) flow rate restrictor", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish".

Dimensions Showerhead, 352SH

Symmons p/n, SH-01378

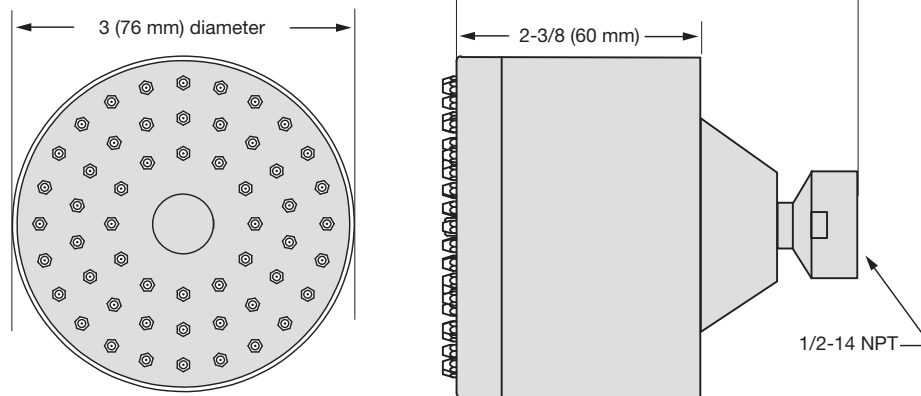

Note: Dimensions subject to change without notice.