

Model 1210 1" Oil-less Threading Machine

NEW!

Thread Clean

The Model 1210 is the world's first COMPLETELY OIL-LESS Threading Machine! No more worrying about oil spills and drips, no more setting up away from the installation site...with the Model 1210 you can thread right where you install: in basements, on rooftops, even in finished rooms! To eliminate cutting oil, the Model 1210 combines specially formulated RIDGID Thread Cutting Coolant and unique RIDGID Oil-less Gold Dies. RIDGID Thread Cutting Coolant will evaporate on contact with the pipe and leave you with a clean, dry, extremely high quality thread ready for immediate installation!

Thread Fast

The 1210's new, advanced coolant flow system allows you to begin threading right away, no matter how long the machine has sat idle. Faster priming means faster jobs!

Keep Moving

At only 59 lb., the 1210 can be carried to and around the jobsite by one man. Cut, ream, thread - the Model 1210 has all the tools you expect on a larger machine and a powerful 1/2 HP universal motor to get the job done. And its reformulated coolant dramatically advances die life for maximum uptime.

Thread where you need to thread! Save time, money, and improve your service productivity with the RIDGID Model 1210 Oil-less Threading Machine.



Capacity

Pipe: 1/2", 3/4", 1"

Technical Specifications

Motor: 1/2 HP, 115V Universal 50-60 Hz

Motor Control: Heavy-Duty Toggle ON/OFF with Integral Foot Switch

Spindle Speed: 25 RPM

Chuck: Hammer-type with Replaceable Inserts; Cam Action Rear Chuck

Coolant System: Through-the-head with Integral Coolant Reservoir; Self-priming Gerotor Pump; 20 oz. Reservoir Capacity



Standard Equipment

Model 1210 Oil-less Threading Machine with Foot Switch

1 - Model 610 Quick-Open Die Head

1 - Model 334 Reamer

1 - Model 354 Cutter




1 - Set 1/2 - 3/4" Oil-less Gold Dies

1 - Set 1" Oil-less Gold Dies

1 - Quart Thread Cutting Coolant

| Catalog No. | Model No. | Description | lb. | kg |
|-----------------|-----------|-----------------------------------|-----|------|
| Machine | | | | |
| 67872 | 1210 | 1/2" - 1" NPT, 115V, 25-60 Hz | 59 | 26,8 |
| Die Head | | | | |
| 67817 | 610 | 1/2" - 1" NPT, Quick-Opening, RH | 11 | 5,0 |
| Dies | | | | |
| 67807 | — | 1/2" - 3/4" NPT Oil-less Gold, RH | 1 | 0,5 |
| 67812 | — | 1" NPT Oil-less Gold, RH | 1 | 0,5 |
| Coolant | | | | |
| 30693 | — | 1 Qt. Thread Cutting Coolant | 2 | 0,9 |
| Stand | | | | |
| 67822 | 120 | Folding Stand | 12 | 5,5 |

Please Note: The Model 1210 is warranted for use only with RIDGID Thread Cutting Coolant and RIDGID Oil-less Gold Dies. RIDGID Thread Cutting Coolant and RIDGID Oil-less Gold Dies are not for use with any other RIDGID threading equipment.

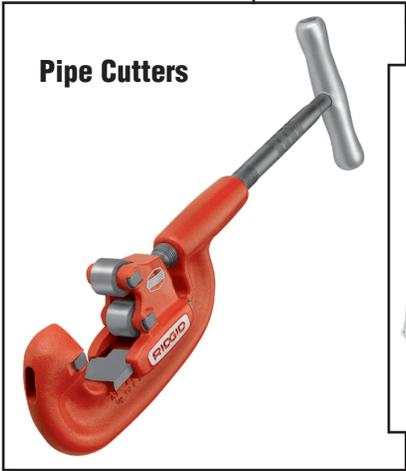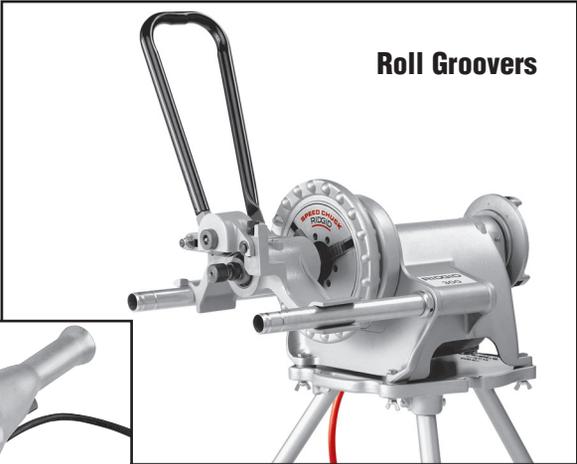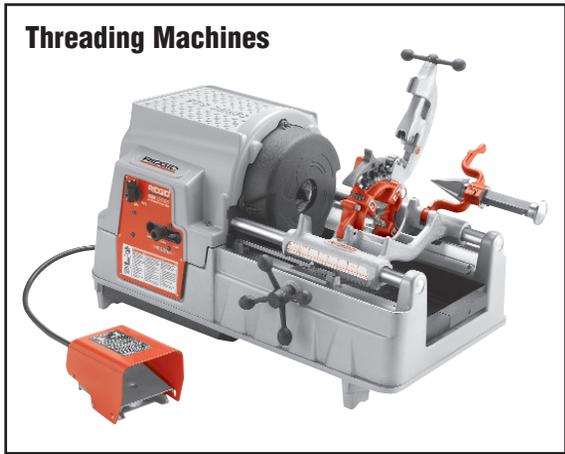

Distributor

For the complete selection of the Ridge Tool product line, please refer to the Ridge Tool Catalog or www.RIDGID.com.

