

MultiChoice® Universal Thermostatic Tub and Shower

TECK®
COMMERCIAL



Specification: (example)

- R10000-UNWS** ROUGH-IN only
 - Concealed in-wall MultiChoice® universal valve
 - Back-to-back capability, Integral screwdriver stops
 - **Heavy Duty forged brass** valve body
 - 1/2" Universal inlets to accept 1/2" copper, 1/2" iron pipe, PEX or CPVC adaptors
 - 1/2" Male thread inlets/outlets
- FINISH TRIM ONLY:**
 - TempAssure® 17T Thermostatic cartridge
 - Polished chrome plated finish
 - Lever volume control; temperature adjustment dial
 - Non-removeable red/blue temperature markings and ... with ... (add product variation) with ... (add shower)



T17TH155

Engineer/Architect Approval







Model Specified:

Approval:

Date:

TUB AND SHOWER DESCRIPTION	PRODUCT NO.		
ROUGH-IN Valve	R10000-UNWS		
FINISH TRIM only	T17TH		5



PRODUCT VARIATION	SHOWER	HANDLE
0 <input type="checkbox"/>	0 Specify "0" When No Shower Outlet Required <input type="checkbox"/>	0 <input type="checkbox"/>
1 Shower Valve Only  <input type="checkbox"/>	1 <input type="checkbox"/>	1 <input type="checkbox"/>
2 Tub and Shower  <input type="checkbox"/>	2 3-Function Touch-Clean® Showerhead, Arm & Flange 2.0 USGPM (7.6 L/min.)  <input type="checkbox"/>	2 <input type="checkbox"/>
3 <input type="checkbox"/>	3 Touch-Clean® Showerhead, Arm & Flange 2.0 USGPM (7.6 L/min.)  <input type="checkbox"/>	3 <input type="checkbox"/>
4 <input type="checkbox"/>	4 <input type="checkbox"/>	4 <input type="checkbox"/>
5 <input type="checkbox"/>	5 Handshower, 610mm (24") S/S Bar with ADA Slide 2.5 USGPM (9.5 L/min.) (1)  <input type="checkbox"/>	5 Metal Lever Volume Control Handle w/ Temperature Adjustment  <input checked="" type="checkbox"/>
6 <input type="checkbox"/>	6 <input type="checkbox"/>	6 <input type="checkbox"/>
7 <input type="checkbox"/>	7 <input type="checkbox"/>	7 <input type="checkbox"/>
8 <input type="checkbox"/>	8 <input type="checkbox"/>	8 <input type="checkbox"/>
9 <input type="checkbox"/>	9 <input type="checkbox"/>	9 <input type="checkbox"/>

Set screw shower arm flange supplied on Shower Option No. 2 and 3. (1) Two check valves in handshower.

See Page DSP-T17THOpt for Add-On options available. See Page DSP-B-R10000-HDF for additional Rough-In options. Refer to www.specselect.com for individual models.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

Flow Rates are at 80 PSI.

Note: Use this page front and back as a product submittal sheet.


DSP-T17TH1 Rev. B




TECK[®]
COMMERCIAL

MultiChoice[®] Universal Thermostatic Tub and Shower



Approvals:

- CSA certified
 - Complies to ASME A112.18.1
 - Lever Handle ADA Compliant and meet Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force 
 - Thermostatic Valve ASSE 1016
 - Handshower back flow protection provided by two integral certified check valves in series, which operate independently, ASME A112.18.3 and ASME A112.18.1 / CSA B125.1.
- (Contact Delta Representative for State and/or Local Approvals.)

FLOW RATE vs PRESSURE

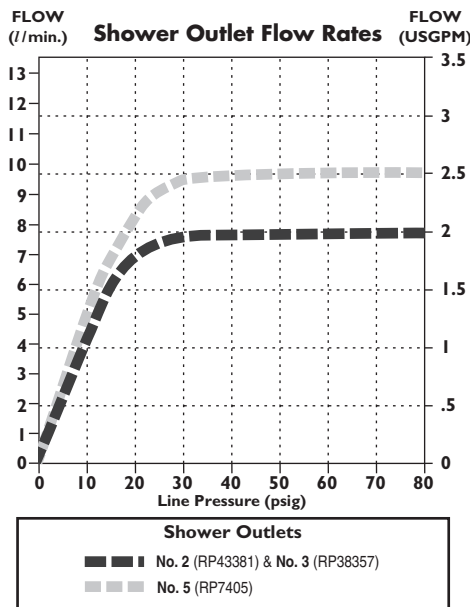

FLOW RATE vs PRESSURE

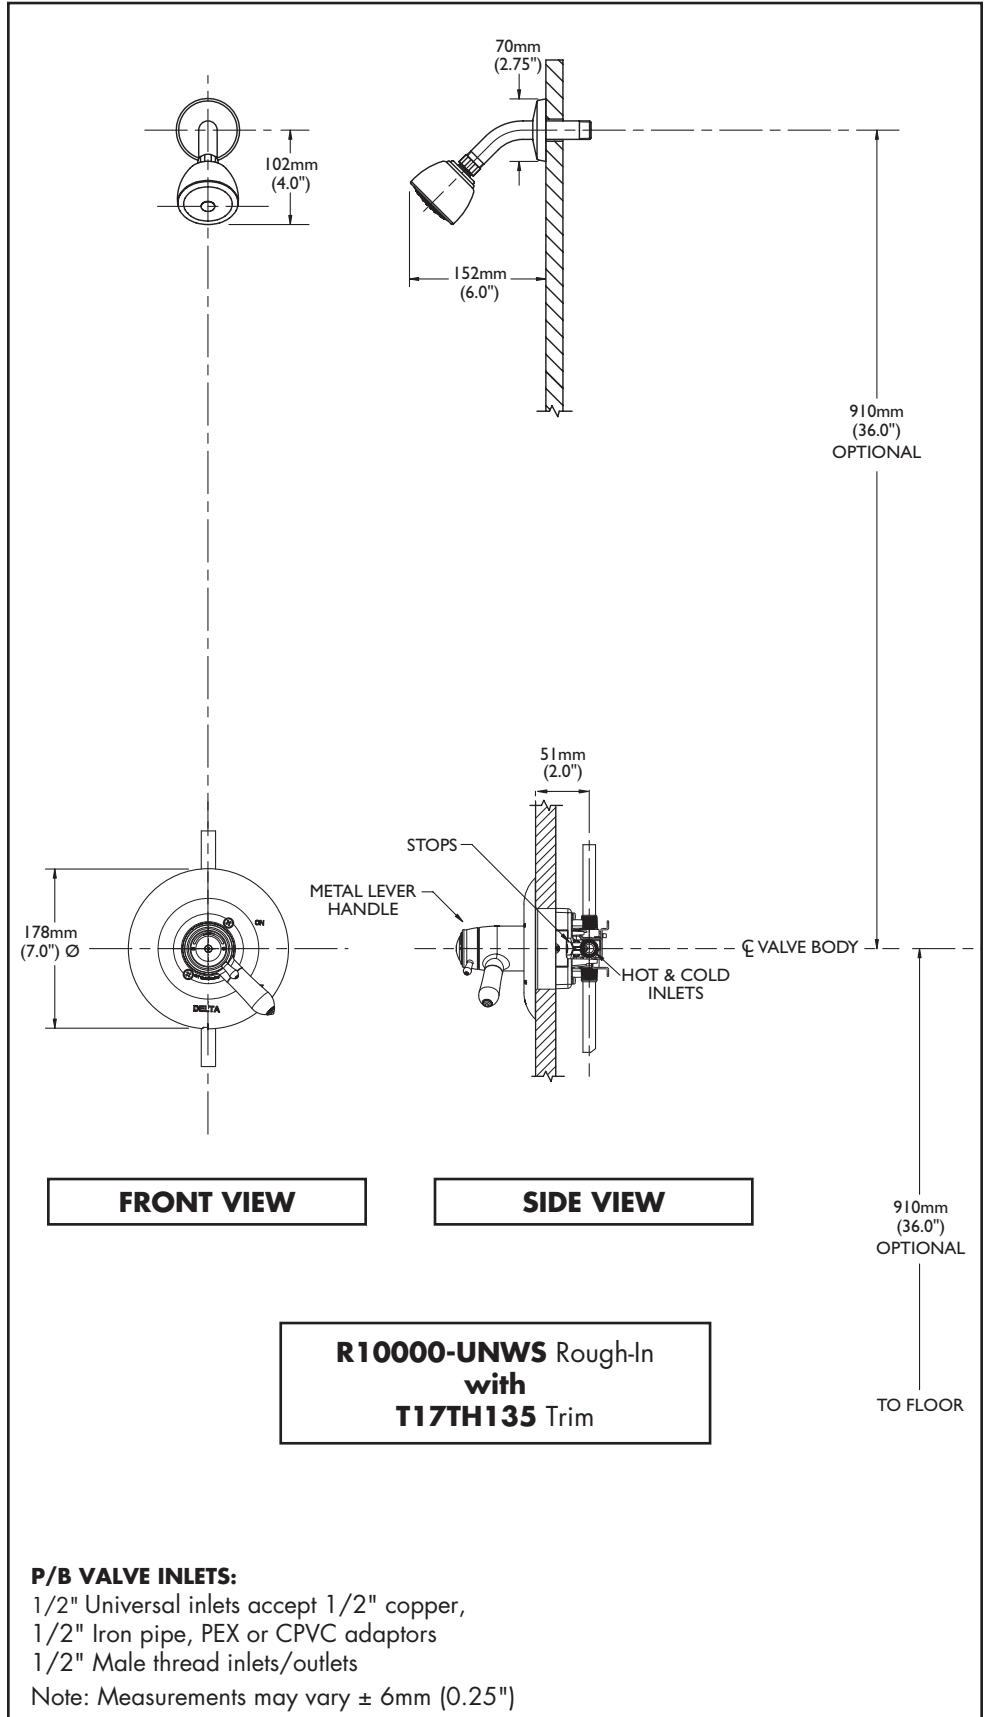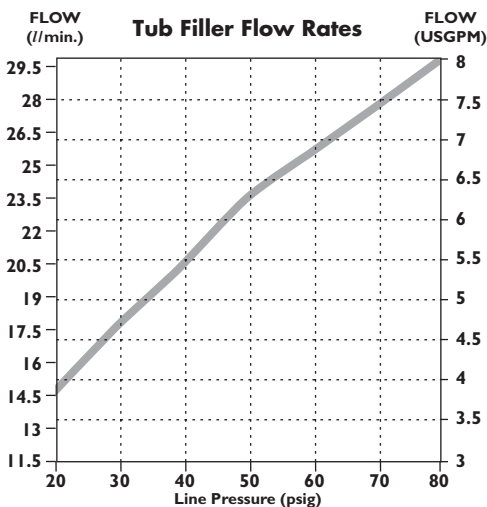

Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.