



## H-x056 - Y-Strainers

### H-x056W Series

### Forged DZR Brass Y-Strainer (20 Mesh)

w/ 1/2" Plugged NPT Port


### Certifications

Certified to NSF/ANSI/CAN 61 & 372





| Size (in)    | Item#    | Weight (lbs) | CTN Qty | Case Qty | A    | B    | C    |                        |                  |
|--------------|----------|--------------|---------|----------|------|------|------|------------------------|------------------|
| <b>FIP</b>   |          |              |         |          |      |      |      | <b>250 PSI CWP Max</b> | <b>200°F Max</b> |
| 1/2"         | H-40562W | 0.49         | 8       | 80       | 2.60 | 2.00 | 3.25 |                        |                  |
| 3/4"         | H-40563W | 0.68         | 6       | 60       | 3.03 | 2.25 | 3.75 |                        |                  |
| 1"           | H-40564W | 0.84         | 4       | 40       | 3.31 | 2.50 | 4.00 |                        |                  |
| 1 1/4"       | H-40565W | 1.40         | 4       | 24       | 3.94 | 2.75 | 4.50 |                        |                  |
| 1 1/2"       | H-40566W | 1.98         | 2       | 20       | 4.33 | 3.00 | 5.00 |                        |                  |
| 2"           | H-40567W | 3.27         | 2       | 10       | 5.12 | 3.75 | 6.00 |                        |                  |
| <b>Press</b> |          |              |         |          |      |      |      | <b>250 PSI CWP Max</b> | <b>200°F Max</b> |
| 1/2"         | H-80562W | 0.54         | 12      | 72       | 4.06 | 2.00 | 3.25 |                        |                  |
| 3/4"         | H-80563W | 0.77         | 6       | 48       | 4.84 | 2.25 | 3.75 |                        |                  |
| 1"           | H-80564W | 0.91         | 5       | 40       | 4.88 | 2.50 | 4.00 |                        |                  |
| 1 1/4"       | H-80565W | 1.39         | 4       | 24       | 5.71 | 2.75 | 4.50 |                        |                  |
| 1 1/2"       | H-80566W | 2.23         | 2       | 12       | 6.42 | 3.00 | 5.00 |                        |                  |
| 2"           | H-80567W | 3.49         | 2       | 8        | 7.64 | 3.50 | 6.00 |                        |                  |
| <b>SWT</b>   |          |              |         |          |      |      |      | <b>250 PSI CWP Max</b> | <b>200°F Max</b> |
| 1/2"         | H-50562W | 0.37         | 8       | 80       | 2.36 | 2.00 | 3.25 |                        |                  |
| 3/4"         | H-50563W | 0.61         | 6       | 60       | 3.23 | 2.25 | 3.75 |                        |                  |
| 1"           | H-50564W | 0.77         | 4       | 40       | 3.54 | 2.50 | 4.00 |                        |                  |
| 1 1/4"       | H-50565W | 1.25         | 4       | 24       | 4.25 | 2.75 | 4.50 |                        |                  |
| 1 1/2"       | H-50566W | 1.87         | 2       | 20       | 4.92 | 3.00 | 5.00 |                        |                  |
| 2"           | H-50567W | 3.31         | 2       | 8        | 6.10 | 3.75 | 6.00 |                        |                  |



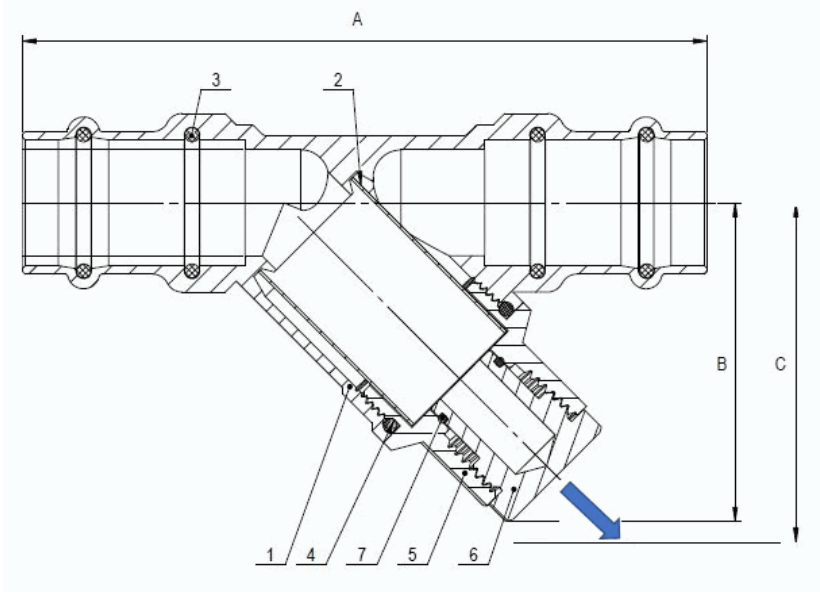

| NO. | DESCRIPTION  | MATERIAL            |
|-----|--------------|---------------------|
| 1   | Body         | Lead-Free DZR Brass |
| 2   | Strainer     | Stainless Steel     |
| 3   | O-Ring       | EPDM                |
| 4   | O-Ring       | EPDM                |
| 5   | Cap          | Lead-Free DZR Brass |
| 6   | 1/2 NPT Plug | Lead-Free DZR Brass |
| 7   | O-Ring       | EPDM                |

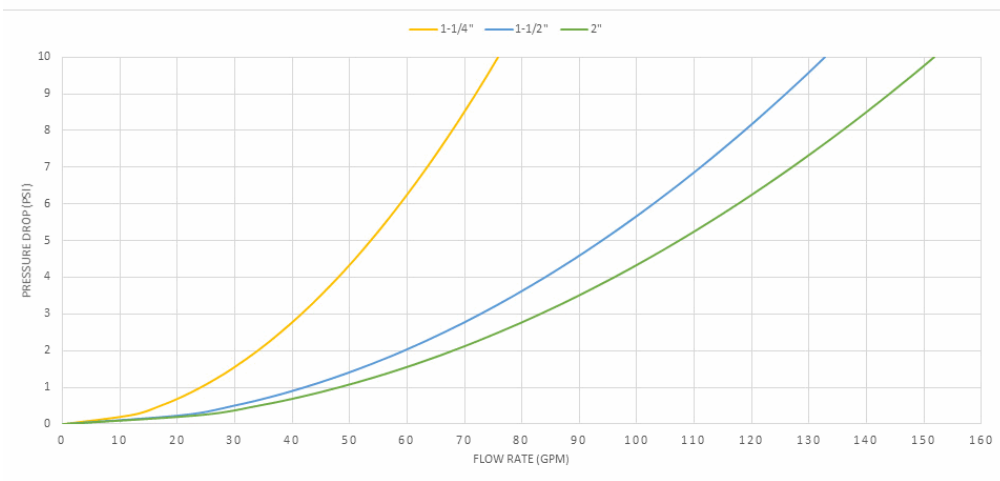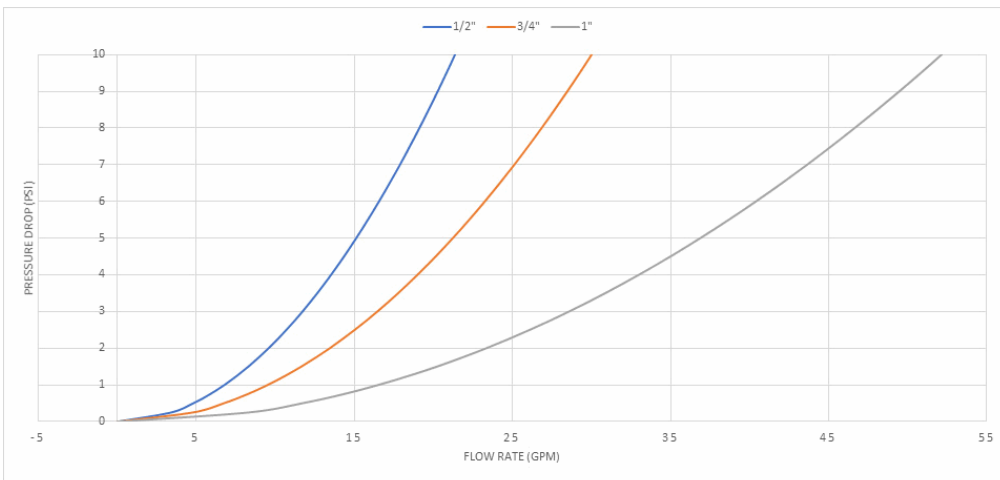

Specifications: Designed for use with water, oil, glycol mix in residential or commercial plumbing and heating systems. Threaded (NPT) ends comply with ANSI B1.20.1. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Do not silver braze or overheat valves when soldering. EPDM o-rings for press ends.

REV:9/24/2024

LEAD-FREE: Weighted average lead content ≤ 0.25%

WWW.WEBSTONEVALVES.COM



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov