

**Features**

- 12" (305 mm) escutcheon plate covers two-handle valve assembly holes.
- Single lever handle allows for both on/off activation and temperature setting
- Advanced spray engine provides three alternate experiences: wide coverage, intense drenching, and targeted spray
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Simple thumb tab smoothly transitions between sprays
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 1.75 gpm (6.6 lpm) maximum flow rate at 80 psi (5.5 bar)
- 5" (127 mm) spout with slip-fit connection and diverter knob
- Requires Rite-Temp® pressure-balancing valve (sold separately)

**Material**

- Premium material construction for lasting durability
- KOHLER finishes resist corrosion and tarnishing

**Installation**

- Wall-mount
- 1/2" - 14 NPT connection

**Required Products/Accessories**

K-8304 Series Rite-Temp® Valve & Cartridge Kits  
or

K-8300 Series Rite-Temp® Valve Body Rough-ins  
K-8305 Series Rite-Temp® Cartridges

**Optional Products/Accessories**

K-10351 Test cap for K-8300 Series valve bodies  
1307346 Retro mixer cap for K-304 Rite-Temp valve  
1362395 Retro mixer cap for K-2971 HiFlow Rite-Temp valve

**Codes/Standards**

ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)

**KOHLER® Faucet Lifetime Limited Warranty**


See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*

**Color   Code   Description**

	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black

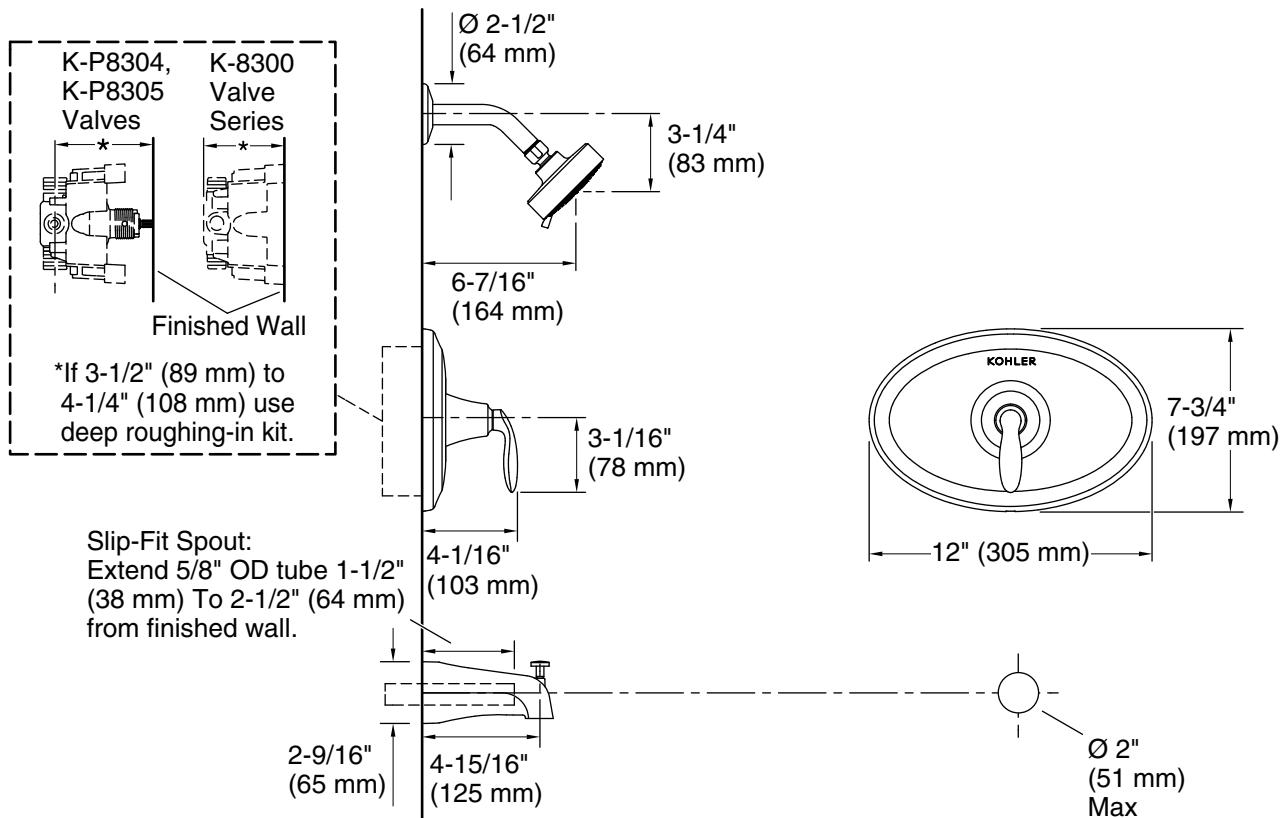

## Technical Information

All product dimensions are nominal.

### Spout:

Spout reach: 4-15/16" (125 mm)

Handshower rated max flow: 1.75 gal/min (6.6 l/min)

Shower/Rainhead rated max flow: 1.75 gal/min (6.6 l/min)

### Notes

Install this product according to the installation instructions.