



# WARDFLEX® Female Mechanical Tees

Ward Manufacturing, LLC.

117 Gulick Street  
 Blossburg, PA 16912  
 Tel. (800)248-1027  
 www.wardflex.com  
 www.wardmfg.com

## Description:

The 3/8" thru 1-1/4" WARDFLEX® tubing is terminated using the patented, STEPSAVER double seal fitting. The 1-1/2" and 2" tubing utilize the WARDFLEX® traditional gasketed fitting design. Only fittings designed and listed for use with the WARDFLEX® and WARDFLEX® II CSST Piping Systems shall be used when connecting to the flexible piping.

## Features:


- Approved for concealed use
- One corrugation crush seal
- Reusable
- 3/8" through 1-1/4" patented STEPSAVER fittings
  - Primary metal to metal seal
  - Secondary gasket seal
- 1-1/2" and 2" fittings
  - Reliable gasket seal

## Components:

- Female Tee Body
- Retainer Rings (2)
- Nuts (2)
- Gaskets (2)

## Listings:

- CSA: File# 112940\_0\_000
- FM 3011939
- IAPMO: File# 3353
- ICC: Report# ESR-1879

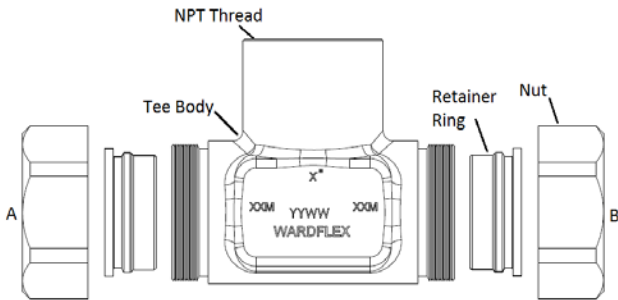

## Technical Data:

### General

Certified Operating Pressure	25 psi
------------------------------	--------

### Material

1/2" - 1 1/4" Body, Retainer Ring, & Nut	Brass
1 1/2" & 2" Body	Malleable Iron
Gasket	Composite Fiber

### Dimensions

Price Sheet Item #	CSST Size A	Nut Hex A	CSST Size B	Nut Hex B	NPT Size	Assembled Length	Approximate Weight (lbs)
401	1/2"	1-3/16"	1/2"	1-3/16"	1/2"	3.104"	1.22
402	3/4"	1-1/2"	3/4"	1-1/2"	1/2"	3.31"	1.49
403	3/4"	1-1/2"	3/4"	1-1/2"	3/4"	3.31"	1.36
408	1"	1-3/4"	1"	1-3/4"	3/4"	3.73"	2.13
413	1"	1-3/4"	1"	1-3/4"	1"	3.73"	1.98
405	1-1/4"	2-1/4"	1-1/4"	2-1/4"	1-1/4"	5.35"	3.95
407	1-1/2"	3"	1-1/2"	3"	1-1/2"	6.38"	8.08
409	2"	3-1/2"	2"	3-1/2"	2"	7.40"	11.02