

Specification:

- Control Box Rough-In
- For recessed wall mounting
- 10" square metal box with cover
- Hot and Cold inlet supplies
- Point of use thermostatic mixing valve
- Integral check valves in hot and cold inlets to prevent crossflow
- Outlet temperature range 95-120°F (35-49°C)
- Maximum flow 11 gpm (42 L/min) @ 45 psi pressure loss, minimum flow 0.34 gpm (1.36 L/min)
- Factory assembled waterway components with stops

Approvals:

- CSA certified to CSA B125.3, ASSE 1069, ASSE 1070 and NSF372
- Complies to NSF61 Section 9
- Verified compliant with 0.25% weighted average Pb content regulations



(Contact Delta Representative for State and/or Local Approvals.)


Engineer/Architect Approval

Model Specified:

Approval:

Date:

ELAVT0008ARI Thermostatic Mix Version

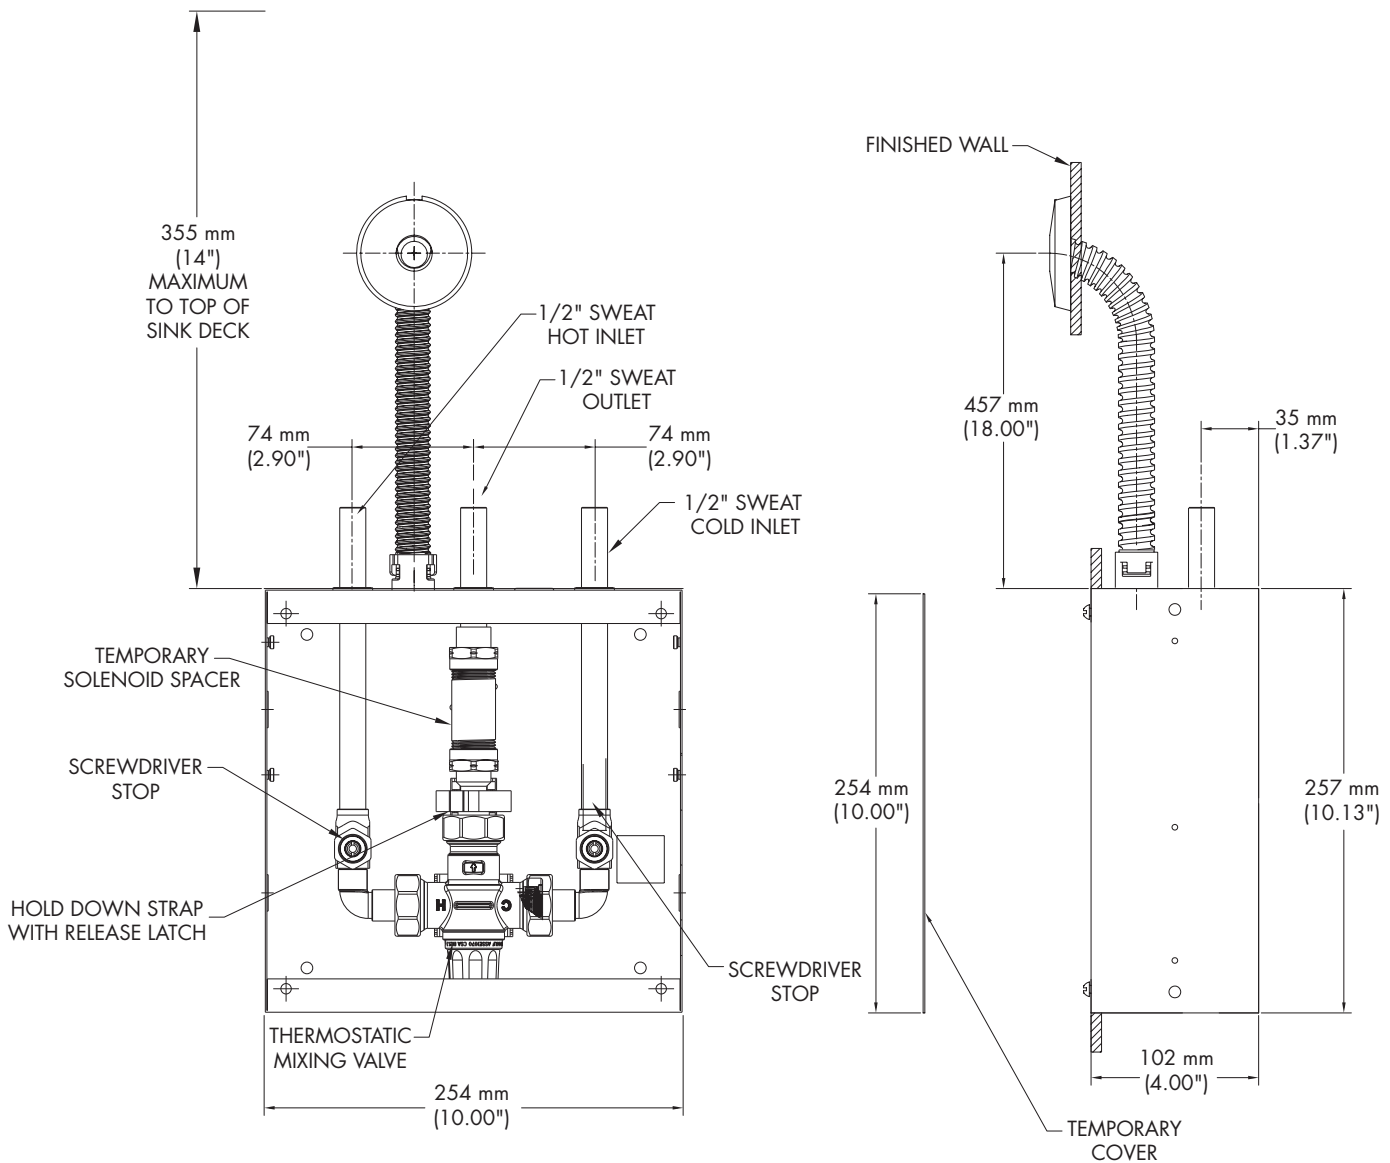

Note: Measurements may vary ± 6 mm (0.25")

Refer to www.specselect.com for individual models.

Note: Use this page as a product submittal sheet.