




PVC Spring Check Valve Features:

- To stop backflow and syphoning.
- All water applications.
- Maintenance free operation.
- Tapered valve body design & enlarged valve chamber reduces chatter & turbulence.
- Raised radius valve seat, EPDM Seal for positive seal.
- Stainless steel spring load of 1/2 lb. or 2 lb.
- Solvent weld or male and female thread connections.
- 200 P.S.I. static pressure rating @ 72° F.
- Excess solvent cement trap - Designed to help prevent excess cement or softened material from entering into the body and sealing area during installation.
- NSF/ANSI 61+372.

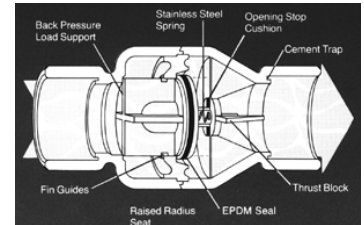

1001, 1011, 1012
Series

NSF/ANSI
61+372



1011C Series

NSF/ANSI
61+372



1800 Series (hex and round)

Part Number	IPS Size	Body Length	Ctn Qty	List Price
-------------	----------	-------------	---------	------------

PVC Spring Check Valves (fip x fip)

Spring Tension 1/2 lb

1001-05	1/2"	4-1/8"	20	\$ 24.73
1001-07	3/4"	4-1/8"	20	25.67
1001-10	1"	5-1/4"	20	36.75
1001-12	1-1/4"	6-3/16"	15	49.60
1001-15	1-1/2"	6-3/16"	15	52.87
1001-20	2"	7"	10	76.06

PVC Spring Check Valves (slip x slip)

Spring Tension 1/2 lb

1011-05	1/2"	4-1/8"	20	24.80
1011-07	3/4"	4-1/8"	20	25.67
1011-10	1"	5-1/4"	20	37.20
1011-12	1-1/4"	6-3/16"	15	49.60
1011-15	1-1/2"	6-3/16"	15	52.87
1011-20	2"	7"	10	76.06
1011-25	2 1/2"		8	116.80
1011-30	3"		8	136.95

Clear

1011C-15	1-1/2"	6-3/16"	10	68.31
1011C-20	2"	7"	10	88.77

PVC Spring Check Valve, (slip x slip)

Spring Tension 2 lbs.

1012-10	1"		20	38.43
1012-12	1-1/4"		15	51.22
1012-15	1-1/2"		15	54.58
1012-20	2"		10	78.55

Foot Valve Screen (polyethylene, 100 mesh)

1800-07	3/4" hex style	2-2/5"	1	4.28
1800-10	1" round style	2-4/5"	1	4.97
1800-12	1-1/4" hex style	3"	1	7.12
1800-15	1-1/2" round style	3-2/5"	1	8.60
1800-20	2" round style	3-4/5"	1	9.97