


Location:



SYMMONS® Dia™

Shower Valve System 3500-CYL Specification Submittal

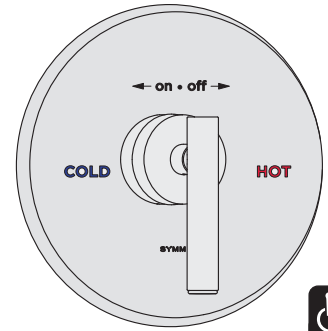

Feature Highlights


- Symmons Shower Valve System with Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Screwless escutcheon with colored lettering
- Cylinder (CYL) style lever handle
- Polished chrome finish (standard)

Model Numbers

- 3500-CYL
Shower Valve System with Symmons Temptrol® mixing valve p/n 4000-BODY
- 3500-CYL-TRM
Trim only, valve must be ordered separately
- 4000-BODY
Symmons Temptrol® mixing valve without trim
- 4000-X-BODY
Symmons Temptrol® mixing valve without trim. Valve includes integral service stops to allow water shut-off for service

Handle Options / Modifications

Append appropriate -suffix to model number

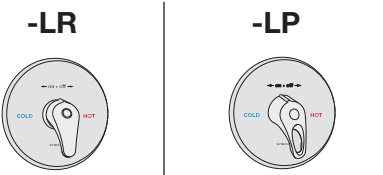

- LR Lever handle
- LP Loop style lever handle

Options / Modifications

Append appropriate -suffix to model number

- IPS IPS connections: 1/2 inch female IPS connections on Temptrol® mixing valve
- X Service Stops: Temptrol® mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY (Option applies when ordering 3500-CYL)
- B Metal escutcheon
- ETCH Escutcheon with black & white lettering

Finish Options

Append appropriate -suffix to model number

- Polished chrome finish (standard)


Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations
- 5 years - for commercial installations

Dimensions *Dia Shower Valve System, 3500-CYL*

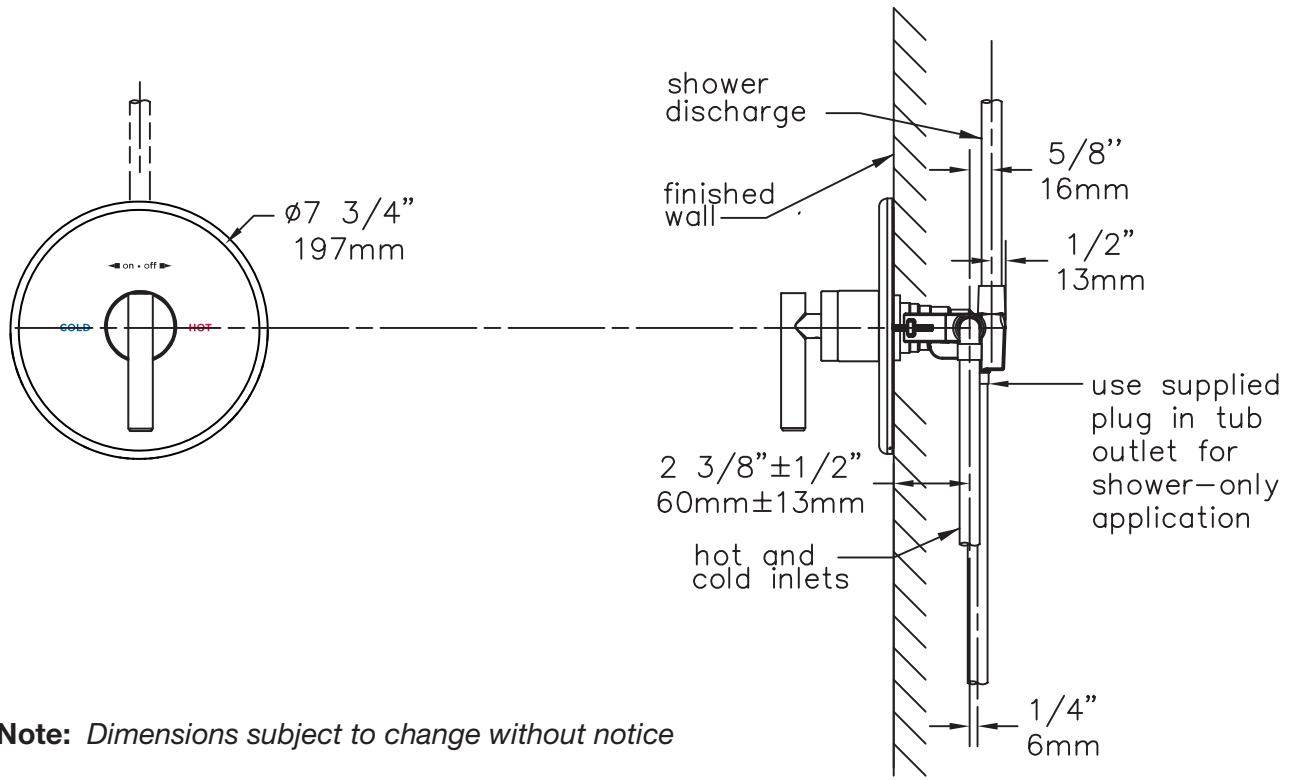

Note: *Dimensions subject to change without notice*