




# WATER EFFICIENT LAVATORY AERATORS

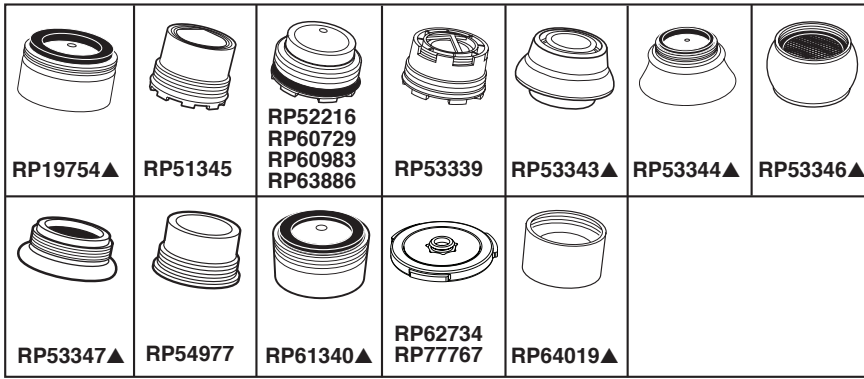

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

| Part #  | Description                              | Models   |
|---------|--|--|
| RP19754 | 1.5 gpm aerator assy<br>15/16"-27 male   | 585, 3585, 586, 3586, 2530, 3530, 4530, (500, 501, 502, 505, 520, 522, 523, 524, 525, 540, 541, 542, 544, non-DST), 3544, 3543, 2522, 2521, 2520, 2502, 2500, 583, 2583, 3483, 3582, 582 |
| RP51345 | 1.5 gpm aerator assy<br>M16.5x1 male     | (538 non-DST), 2538, 3538, 4538, 2592, 3592, 4592<br>Wrench Included   |
| RP52216 | 1.5 gpm aerator assy<br>M21.5x1 male     | 2551, 3551, 4551 (500, 501, 502, 511, 515, 516, 520, 522, 523, 540, 541, 542, 544 DST)<br>Wrench RP52217   |
| RP53339 | 1.5 gpm aerator assy<br>M21.5x1 male     | 578, 579 non-DST<br>Wrench RP52217   |
| RP53343 | 1.5 gpm aerator assy<br>3/4"-27 female   | 555, 755, 2555, 3555, 4555, 2155   |
| RP53344 | 1.5 gpm aerator assy<br>15/16"-27 male   | 2540, 3540, 4540   |
| RP53346 | 1.5 gpm aerator assy<br>55/64"-27 female | 2569, 3569, 4569   |
| RP53347 | 1.5 gpm aerator assy<br>13/16"-27 male   | 2578, 3578, 4578, 2575, 3575, 4575   |
| RP54977 | 1.5 gpm aerator assy<br>13/16"-27 male   | (538, 578, 579, 551, 592, 751, 792, 2578, 3578, 15938T DST)<br>Wrench RP52217  |
| RP60729 | 0.5 gpm<br>M21.5x1 male                  | (500, 501, 502, 520, 522, 523, 524, 525 DST)<br>Wrench RP52217   |
| RP60983 | 1.5 gpm aerator assy<br>M21.5x1 male     | (500, 501, 502, 520, 522, 523, 524, 525 DST)<br>Wrench RP52217   |
| RP61340 | 1.5 gpm aerator<br>15/16"-27 male        | B501LF, B510LF, B512LF, (B2510LF, B2512LF - Male), B2596LF, B3596LF  |
| RP62734 | 1.5 gpm insert                           | All handshowers  |
| RP77767 | 1.75 gpm insert                          | All handshowers  |
| RP63886 | 1.0 gpm aerator<br>M21.5x1 male          | 2551, 3551, 4551 (500, 501, 502, 511, 515, 516, 520, 522, 523, 540, 541, 542, 544 DST)<br>Wrench RP52217   |
| RP64019 | 1.5 gpm aerator<br>15/16"-27 female      | B2510LF, B2512LF - Female  |

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.


DSP-L-AERATORS Rev. C

## STANDARD SPECIFICATIONS:

- Maximum 0.5 gpm flowrate @ 60 PSI.
- Maximum 1.0 gpm flowrate @ 60 PSI.
- Maximum 1.5 gpm flowrate @ 60 PSI.
- Water efficient uses 30% less than industry standard of 2.2 gpm @ 60 PSI per ASME.

## WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

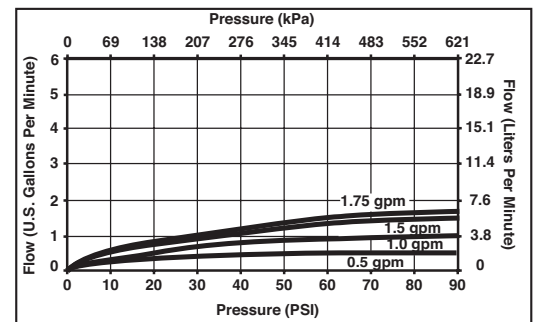

55 E. 111th Street, Indianapolis, Indiana 46280  
350 South Edgeware Road, ST. Thomas, ON N5P 4L1  
© 2014 Masco Corporation of Indiana