


Features

- Cast iron with Safeguard® finish
- UL listed
- Variable speed pump, 1.5 kW heater, back-lit user keypad and remote control
- 8 Flexjets
- 8 effervescence ports
- 4 chromatherapy lights
- 240 V, 20 A electrical service
- Color-matched jet trim included
- 66" (1676 mm) x 36" (914 mm) x 24" (610 mm)

5.5' EXPERIENCE BATH WHIRLPOOL WITH SPA PACKAGE K-856-AH

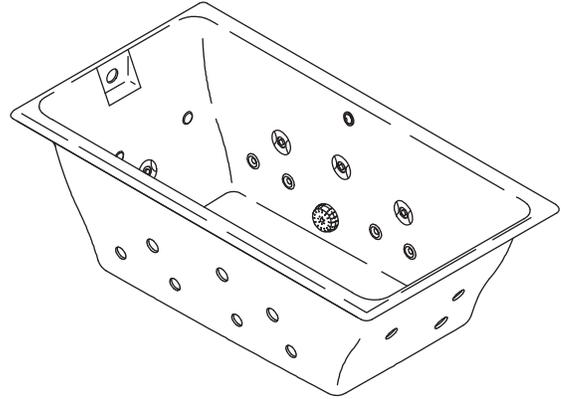

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.1
- ASME A112.19.7
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

Specified Model

Model	Description	Colors/Finishes		
K-856-AH	5.5' experience bath whirlpool with Spa Package	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
Required Accessories				
K-7147-AF	Adjustable pop-up bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Optional Accessories				
K-587	Undermount installation kit (template and installation instructions)			<input type="checkbox"/> NA
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____	

Product Specification

The bath whirlpool shall be 66" (1676 mm) in length, 36" (914 mm) in width, and 24" (610 mm) in height. Product shall be made of cast iron with Safeguard® finish. Product shall have 8 Flexjets, 8 effervescence ports, and 4 chromatherapy lights. Product shall have a variable speed pump, 1.5 kW heater, back-lit user keypad and remote control. Product shall be UL listed. Bath whirlpool shall be Kohler Model K-856-AH-_____.

TEA-FOR-TWO®

Technical Information

Fixture*:	
Basin area:	
Bathing area, bottom	45" (1143 mm) x 25" (635 mm)
Bathing area, top	58" (1473 mm) x 29" (737 mm)
Weight	510 lbs (231.3 kg)
To overflow:	
Water depth	19-1/2" (495 mm)
Capacity	105 gal (397.5 L)
* Approximate measurements for comparison only.	

Pump:	kW	V	Hz	A
	1.5	240	50/60	11

Drop-in cut-out	65-1/2" (1664 mm) x 35-1/2" (902 mm)
-----------------	--------------------------------------

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):

Pump/control	220-240 V, 20 A, 50/60 Hz
--------------	---------------------------

Installation Notes

Pump/piping protrudes beyond rim (see below).

Install this product according to the installation guide.

Cast iron whirlpools are extremely heavy, making some drop-in installations difficult. Splitting the deck/surround is recommended if installing into a deck.

Floor support under whirlpool must provide for a minimum of 86 lbs/square foot (421 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

