



PRODUCT SHEET
AMMA 7236
 72" X 36" X 21"



THERMOMASSEUR® BATH	\$
THERMASENS™ BATH	\$
SOAKER BATH	N/A

THERMOMASSEUR (TMU)	
Jets	54
2 heated backrests (Independently controlled)	included
2 heated headrests	included
MiaPlus® Control	included
Geysair™	\$
AromaCloud™	\$
Chromatherapy - LED	\$

THERMASENS (TMSU)	
AromaCloud™	included
Chromatherapy - LED	included
WarmTouchShell™	included
2 DOT controls	included
2 nd WarmTouchShell	\$

FEATURES INCLUDED			
Installation type	Drop-in & Alcove (3 walls)		
No. of bathers		Inverted V	2
US gallons	50	Armrests	4
Imp. gallons	41	Grab bars (color match)	2
Raised seats	2		

OPTIONAL UPCHARGE APPLICABLE			
COLORS			
Standards			
White	Bone	Biscuit	Almond
Optionals			\$
Black	Mexican sand	Cashmere	Sandbar
CONTROL (TMU ONLY)			
MiaMulti®	\$		
SKIRTS			
	MULTIFIT	ELEGANCE	SJ-1
Skirts	\$	\$	\$
Optional colors	\$	\$	\$
CLEAR ACRYLIC GRAB BARS			
With Chrome, Brass or Brushed nickel inserts	\$		
DRAIN & OVERFLOW			
	16" X 35"		
Chrome	\$		
White, Biscuit & Bone	\$		
Brass	\$		
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$		
TILE FLANGE			
Ordered with bath, uninstalled	\$		
Factory-installed	\$		

HAVE YOU THOUGHT ABOUT SUGGESTING THE PURCHASE OF THE LED SYSTEM SO THAT YOUR CUSTOMER MAY ENJOY CHROMATHERAPY?

1 800 463.2187 info@bainultra.com From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

AMMA 7236 72" X 36" X 21"


ACCESSORIES (OPTIONAL)

OTHER

Optional tile flange (specify front or back).

TOTAL PRICE

\$

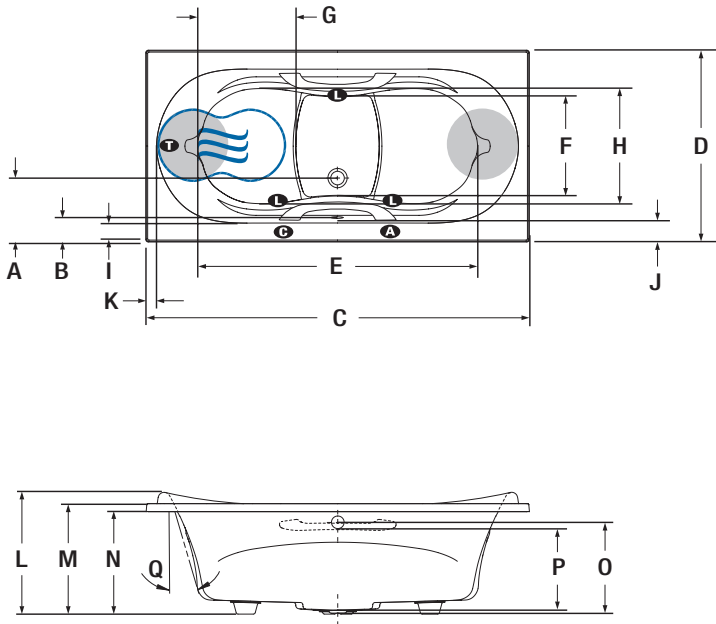

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	12"
B	Outside edge to overflow	4 1/4"
C	Total length	72"
D	Total width	36"
E	Bathing well length	52 1/2"
F	Bathing well width at foot area	18 3/4"
G	Raised seat length	18 1/2"
H	Raised seat width	21 3/4"
I	Deck width (narrowest point)	3 1/8"
J	Deck width (widest point)	4"
K	Deck width at backrest end end	2"
L	Total height to headrest	23 1/8"
M	Height from bottom of tub to top deck	21"
N	Height from bottom of tub to bottom of lip	19 1/2"
O	Height from drain to center of overflow	17"
P	Maximum water level	15 1/4"
Q	Slope of backrest	17°

- T** Indicates turbine position (TMU)
- L** Indicates LED light position
- B** Indicates heated backrest (TMU)
- B** Indicates control position when factory-installed
- W** Indicates WarmTouchShell position (TMSU)
- A** Indicates AromaCloud position

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flange.

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 15 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With Geysair, upgrade to 20 A. 120 V, 60 hz, dedicated line GFCI is needed. For any additional option with the Geysair, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentations).

Approx. shipping weight	158 lbs
Turbine power	755 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.