
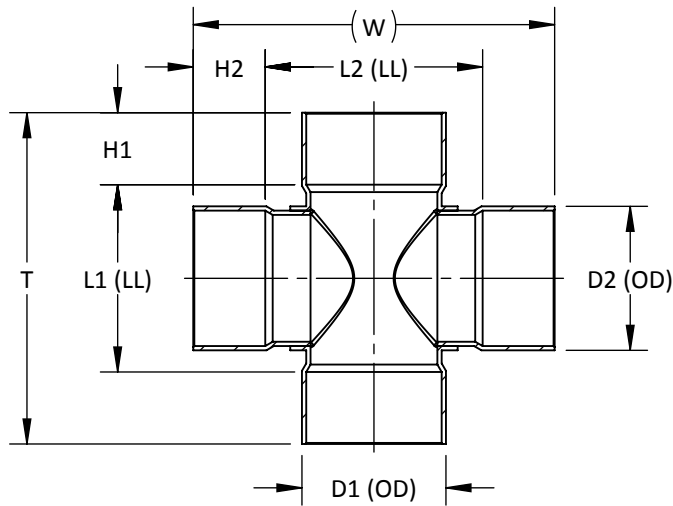




FABRICATED (APPEARANCE MAY VARY)

ASTM D2665, F1866, F2135, CSA B181.2 WHERE APPLICABLE

**TEE CROSS HxHxHxH
PVC SOLVENT WELD DWV**

PART NO.	SIZE IN INCHES	L1	L2	H1	H2	T	W	D1	D2
D1794	4 x 4	---	---	2 1/4	2 1/4	---	---	5 1/32	5 1/32
D1796-4	6 x 4	8 7/8	12 1/8	3 1/4	2 1/4	15 3/8	16 5/8	7 7/32	5 1/32
D1796	6 x 6	9 15/16	12 17/32	3 1/4	3 1/4	16 7/16	19 1/32	7 7/32	7 7/32
D1798-4	8 x 4	8 7/8	13	4 1/4	2 1/4	17 3/8	17 1/2	9 11/32	5 1/32
D1798-6	8 x 6	6 7/8	8 7/8	4 1/4	3 1/4	15 3/8	15 3/8	9 11/32	7 7/32
* D1798	8 x 8	9 7/32	9 7/32	4 1/16	4 1/16	17 11/32	17 11/32	9 11/32	9 11/32
D17910-4	10 x 4	5 27/32	11 19/32	5 3/8	2 1/4	16 19/32	16 3/32	11 17/32	5 1/32
D17910-6	10 x 6	12 5/8	16 3/4	5 3/8	3 1/4	23 3/8	23 1/4	11 17/32	7 7/32
D17910-8	10 x 8	12 1/2	16 5/16	5 3/8	4 1/4	23 1/4	24 13/16	11 17/32	9 11/32
D17910	10 x 10	15 1/4	15 7/8	5 3/8	5 3/8	26	26 5/8	11 17/32	11 17/32
D17912-4	12 x 4	---	---	6 3/8	2 1/4	---	---	13 19/32	5 1/32
D17912-6	12 x 6	13 1/8	18 7/8	6 3/8	3 1/4	25 7/8	25 3/8	13 19/32	7 7/32
D17912-8	12 x 8	14 3/8	20 3/16	6 3/8	4 1/4	27 1/8	28 11/16	13 19/32	9 11/32
D17912-10	12 x 10	---	---	6 3/8	5 3/8	---	---	13 19/32	11 17/32
D17912	12 x 12	19 3/8	17 15/16	6 3/8	6 3/8	32 1/8	30 11/16	13 19/32	13 19/32

-- DIMENSIONS AND APPEARANCE ARE APPROXIMATE AND SUBJECT TO CHANGE
WITHOUT NOTICE DUE TO DESIGN OR PRODUCTION MODIFICATIONS
-- MOLDED FITTING TOLERANCE = $\pm 1/8$ " OVERALL LENGTH
-- FABRICATED FITTING TOLERANCE = ± 1 " LINEAR, $\pm 2^\circ$ ANGULAR

* MOLDED FITTING
† ASSEMBLED FROM MOLDED COMPONENTS
ALL OTHER FITTINGS ARE FABRICATED