



**TEMPASSURE®
MEDIUM FLOW
CUSTOM SHOWER SYSTEM**

SHOWN WITH:

**RAINCAN SHOWERHEAD WITH
H₂OKINETIC® TECHNOLOGY**
87305-BN; 7" Shower Arm with Flange
RP62929BN

WALL MOUNT HANDSHOWER
85810-BN

TOUCH-CLEAN® BODY SPRAYS
84110-BN

6-FUNCTION DIVERTER TRIM
T60905-BN; Diverter Rough R60700

**TEMPASSURE® THERMOSTATIC
VALVE TRIM T60005-BN**
MultiChoice® High Flow Universal Rough
R60000-UNBXHF

View all Medium Flow Custom Shower
components starting on page 129.



**SENSORI® HIGH FLOW
CUSTOM SHOWER SYSTEM**

SHOWN WITH:

**11" CEILING MOUNT RAINCAN
SHOWERHEAD 83310-PC**
6" Ceiling Mount Shower Arm and Flange
RP48985PC

**RAINCAN SHOWERHEAD WITH
H₂OKINETIC® TECHNOLOGY**
87305-PC; 7" Shower Arm and Flange
RP62929PC

WALL MOUNT HANDSHOWER
85810-PC

**BODY SPRAYS WITH H₂OKINETIC®
TECHNOLOGY T84101-PC**
Rough R84101

SENSORI® VOLUME CONTROL TRIM
T66605-PC; Sensori® Volume Control
Rough R66600

SENSORI® THERMOSTATIC VALVE TRIM
T66T005-PC; Sensori® Thermostatic Valve
Rough R66000-WS

View all Sensori High Flow Custom Shower
components starting on page 130.



**TEMPASSURE®
MEDIUM FLOW
CUSTOM SHOWER SYSTEM**

SHOWN WITH:

RAINCAN SHOWERHEAD WITH
H₂OKINETIC® TECHNOLOGY 87385-PN
8" Shower Arm and Flange RP70909PN


6-FUNCTION DIVERTER TRIM
T60985-PN; Diverter Rough R60700

TEMPASSURE® THERMOSTATIC
VALVE TRIM T60085-PN
MultiChoice® High Flow Universal Rough
R60000-UNBXHF

SLIDE BAR HANDSHOWER 85785-PN

BODY SPRAYS WITH H₂OKINETIC®
TECHNOLOGY* T84101-PN
Rough R84101

View all Medium Flow Custom Shower
components starting on page 129.

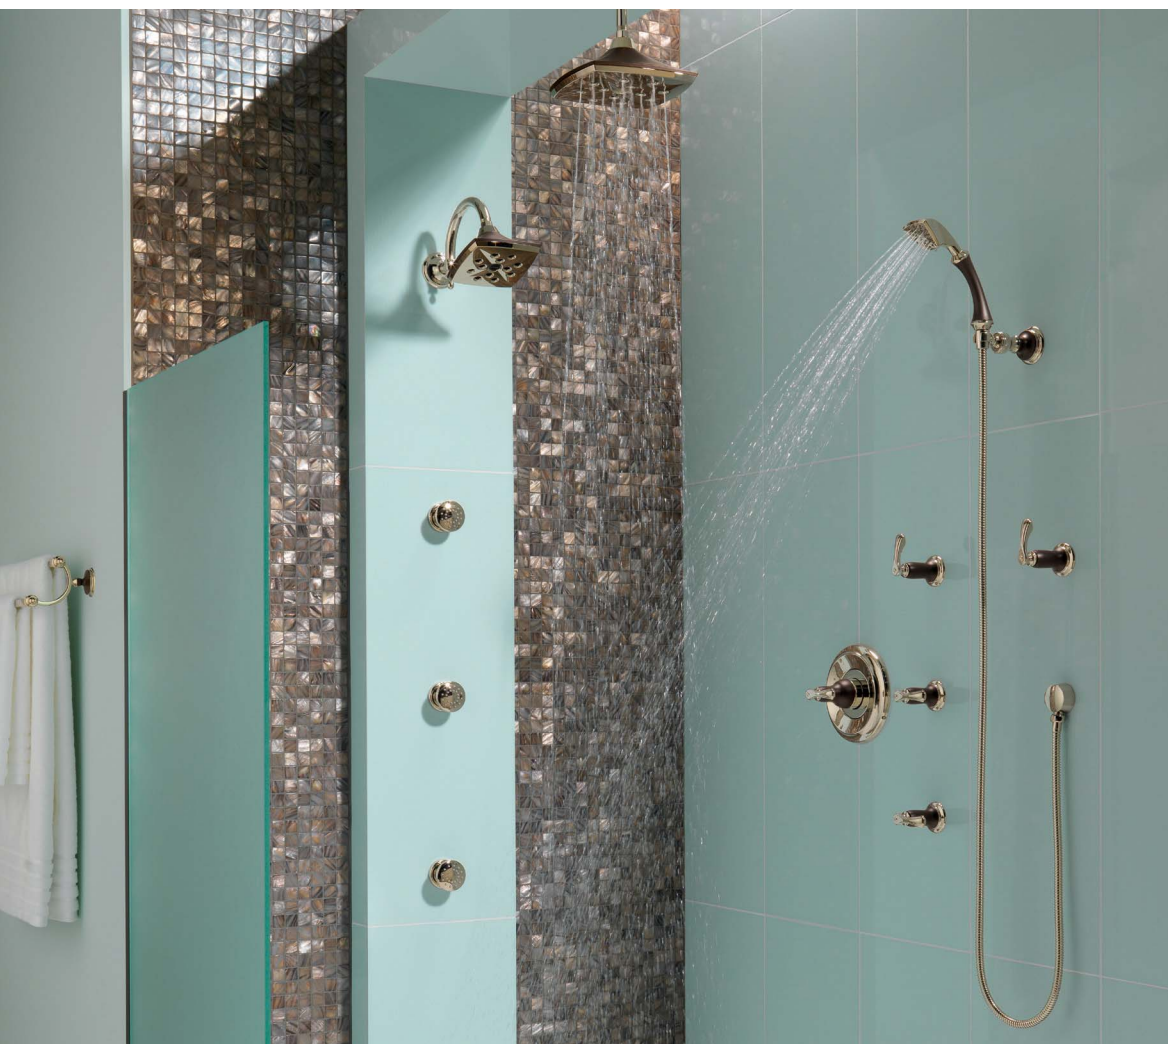

**SENSORI® HIGH FLOW
CUSTOM SHOWER SYSTEM**

SHOWN WITH:

CEILING MOUNT RAINCAN
SHOWERHEAD WITH H₂OKINETIC®
TECHNOLOGY 81385-PNCO
6" Ceiling Mount Shower Arm and Flange
RP48985PN

RAINCAN SHOWERHEAD WITH
H₂OKINETIC® TECHNOLOGY
87385-PNCO; 8" Shower Arm and Flange
RP70909PN

TOUCH-CLEAN® BODY SPRAYS*
84110-PN

WALL MOUNT HANDSHOWER
85885-PNCO

SENSORI® VOLUME CONTROL TRIM
T66685-PNCO; Sensori® Volume Control
Rough R66600

SENSORI® THERMOSTATIC VALVE TRIM
T66T085-PNCO; Sensori® Thermostatic
Valve Rough R66000-WS

View all Sensori High Flow Custom Shower
components starting on page 130.

MAXIMUM FLOW RATE GUIDE

SINGLE-FUNCTION PRESSURE
BALANCE CARTRIDGE

MULTICHOICE® UNIVERSAL ROUGH	40 PSI, 275 kPa	60 PSI, 414 kPa	80 PSI, 550 kPa
	Shower Port	Shower Port	Shower Port
R60000-UNBX	4.6 gpm, 17.4 L/min	5.8 gpm, 22.0 L/min	6.8 gpm, 25.7 L/min
R60000-UNWS	4.5 gpm, 17.0 L/min	5.6 gpm, 21.2 L/min	6.5 gpm, 24.6 L/min
	Tub Port	Tub Port	Tub Port
R60000-UNBX	4.9 gpm, 18.6 L/min	6.0 gpm, 22.7 L/min	7.1 gpm, 26.9 L/min
R60000-UNWS	4.8 gpm, 18.2 L/min	5.9 gpm, 22.3 L/min	6.8 gpm, 25.7 L/min

NOTES: Adding a separate 3- or 6-function diverter will reduce flow rates.
Flow rates vary by shower component. Other installation factors could impact maximum flow rate.

TEMPASSURE® THERMOSTATIC CARTRIDGE

MULTICHOICE® UNIVERSAL ROUGH	40 PSI, 275 kPa	60 PSI, 414 kPa	80 PSI, 550 kPa
	Shower Port	Shower Port	Shower Port
R60000-UNBX	5.6 gpm, 21.2 L/min	7.3 gpm, 27.6 L/min	8.5 gpm, 32.2 L/min
R60000-UNWS	5.4 gpm, 20.4 L/min	6.7 gpm, 25.4 L/min	7.8 gpm, 29.5 L/min
R60000-UNBXHF (High Flow)	7.0 gpm, 26.5 L/min	8.6 gpm, 32.6 L/min	9.9 gpm, 37.5 L/min
R60000-UNWSHF (High Flow)	6.0 gpm, 22.7 L/min	7.4 gpm, 28.0 L/min	8.6 gpm, 32.6 L/min
	Tub Port	Tub Port	Tub Port
R60000-UNBX	6.3 gpm, 23.8 L/min	7.8 gpm, 29.5 L/min	9.0 gpm, 34.1 L/min
R60000-UNWS	5.7 gpm, 21.6 L/min	7.0 gpm, 26.5 L/min	8.2 gpm, 31.0 L/min
R60000-UNBXHF (High Flow)	NO TUB PORT	NO TUB PORT	NO TUB PORT
R60000-UNWSHF (High Flow)	NO TUB PORT	NO TUB PORT	NO TUB PORT

NOTES: R60000-UNBXHF and R60000-UNWSHF roughs for use with Custom Shower and Shower only applications. Must use R60000-UNBX or R60000-UNWS for Tub/Shower or Tub only applications. Adding a 3- or 6-function diverter will reduce flow rates. Flow rates vary by shower component. Other installation factors could impact maximum flow.

SENSORI® THERMOSTATIC
CARTRIDGE

SENSORI® ROUGH	40 PSI, 275 kPa	60 PSI, 414 kPa	80 PSI, 550 kPa
	Shower Port	Shower Port	Shower Port
R66000-WS (Thermostatic Valve Rough)	9.5 gpm, 36.0 L/min	12.0 gpm, 45.4 L/min	13.4 gpm, 50.7 L/min
R66600 (Volume Control Rough)	6.2 gpm, 23.5 L/min	7.7 gpm, 29.2 L/min	8.9 gpm, 33.7 L/min

NOTES: Volume controls are required for every outlet and every set of body sprays (up to 7.7 gpm @ 60 psi).
Flow rates vary by shower component. Other installation factors could impact maximum flow rate.