

The Mystic® and Asana® Single Bowl Sinks Models RLR Series Models RLLVR Series – Lavatory with Overflow

GENERAL

Highest quality sink formed of #18 (1.2mm gauge, type 304 (18-8) nickel bearing stainless steel. Top Mount.

DESIGN FEATURES

Bowl Depth: See Chart on next page.

Finish: Exposed surfaces are hand polished to a Lustrous

Highlighted Satin finish.

Underside: Fully undercoated to reduce condensation

and dampen sound.

Models RLLVR12 and RLLVR16 single bowl lavatory sinks

come with overflow assembly.

OTHER

Drain Opening: 1-1/2" (38mm) - RLLVR12 and RLLVR16

2" (51mm) - KLR9, RLR12

3-1/2" (89mm) - RLR12FB, and RLR16FB

Sink complies with ASME A112.19.3/ CSA B45.4



Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.



All sinks 6" or less in depth are compliant to ADA and ANSI/ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

OPTIONAL ACCESSORIES


Bottom Grid: LKWRBG12SS (RLR12FB)

LKWRBG16SS (RLR16FB)


Drain: LK174, LK175 (RLLVR12, RLLVR16)

LK36 (RLR12)


LK99 (RLR12FB, RLR16FB)
Rinsing Basket: LKWRB12SS (RLR12FB)
Utensil Caddy for Rinsing Basket: LKWUCSS








Model RLLVR12 Model RLLVR16



Model RLR12FB Model RLR16FB

Installation Profile





SEE OTHER SIDE FOR PRODUCT DIMENSIONS.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.


The Mystic® and Asana® Single Bowl Sinks Models RLR Series Models RLLVR Series – Lavatory with Overflow



SINK DIMENSIONS*

| Model Number | Outside Diameter A | Inside Diameter B | Depth C | Drain Opening | Cutout in Countertop | Minimum Cabinet Size | Includes Overflow Assembly |
|-----------------|---|-------------------------|--|--|---|----------------------------|----------------------------------|
| RLR9 | 11 ³ / ₈ (289mm) | 9 (229mm) | 4 ³ / ₄ (121mm) | 2 ³ / ₁₆ (56mm) | Use sink upside down as template and cut 5/16" INSIDE sink outline. | 15 (381mm) | No |
| RLR12 | 14 ³ / ₈ (365mm) | 12 (305mm) | 6 (152mm) | 23/16 (56mm) | | 18 (381mm) | No |
| RLR12FB | 14 ³ / ₈ (365mm) | 12 (305mm) | 6 (152mm) | 3 ¹ / ₂ (89mm) | | 18 (381mm) | No |
| RLLVR12 | 14 ³ / ₈ (365mm) | 12 (305mm) | 6 (152mm) | 1 ¹ / ₂ (38mm) | | 18 (381mm) | Yes |
| RLR16FB | 18 ³ / ₈ (467mm) | 16 (406mm) | 8 (203mm) | 3 ¹ / ₂ (89mm) | | 24 (610mm) | No |
| RLLVR16 | 18 ³ / ₈ (467mm) | 16 (406mm) | 8 (203mm) | 1 ¹ / ₂ (38mm) | | 24 (610mm) | Yes |

^{*}Length is left to rigtht. Width is front to back.

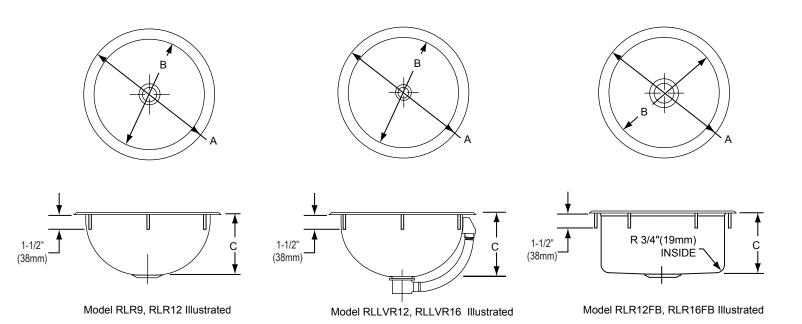

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.