

INSIDE FIT CLOSET FLANGE

888/885 Series

SPECIFICATION:

Installed closet flanges shall be Sioux Chief 885 or 888 Series Inside fit closet flange with or without knockout cap. Closet flange shall have sufficient bolt holes for securing to floor and slots for fastening closet bolts to flange ring. Flange shall solvent weld inside 3" Sch. 40 DWV hold a standard head test.

MATERIALS:

ABS or PVC

CONNECTION TYPE:

Solvent welds inside 3" Sch. 40 DWV pipe.

INSTALLATION NOTES:

When installing on concrete floors, chip away the concrete around the 3" pipe in a $1\frac{1}{4}$ " deep x $\frac{5}{8}$ " wide ring to ensure the flange can be set flush with the floor.

HOLE/SLOT CONFIGURATION:

HOLES: Four screw holes for securing to floor.


SLOTS: Two long slots & two short slots for fastening closet bolts to ring

DIMENSIONS:

Overall Height	A: $2\frac{1}{8}$ "
Overall Diameter	B: 7"
Screw Centers	C: 6"
Hub I.D.	D: $2\frac{11}{16}$ "
Hub O.D.	E: 3"
Flange Thickness	F: $\frac{7}{16}$ "
Inner Diameter	G: 4"




888-P
shown

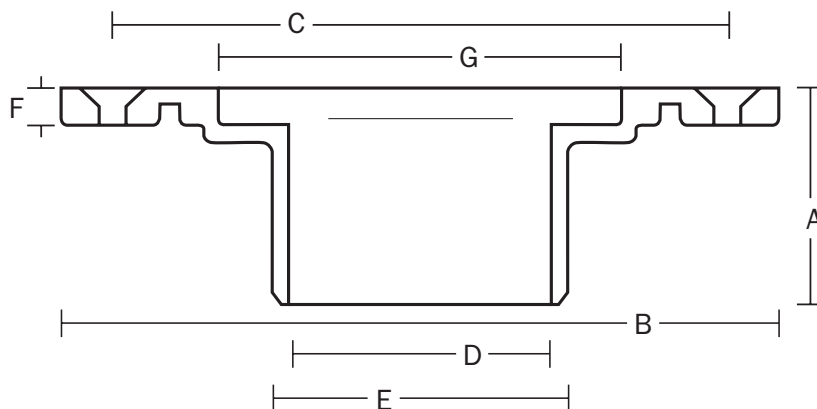

Create Item Number Below

88A-B

e.g. 888-P = Standard 3" PVC Inside-fit closet flange
e.g. 885-A = 3" ABS Inside-fit knockout closet flange



A Flange Type

- ☐ **5** = 3" Inside-fit closet flange with knockout
☐ **8** = 3" Inside-fit closet flange (standard)

B Flange Material

- ☐ **A** = ABS
☐ **P** = PVC