



**MODEL OS-100**

## Outdoor Sensor Kit

for Model 3250  
Fuel Smart HydroStats


### Kit Includes

- Outdoor Reset Sensor with 9-foot cable
- Sensor mounting bracket with 2 screws and 1 wire clip
- Two spade connectors

**WARNING** **Electrical shock hazard.** To prevent electrical shock, death or equipment damage, disconnect power supply before installing or servicing control. Only qualified personnel may install or service this control in accordance with local codes and ordinances. Read instructions completely before proceeding.

**CAUTION** To prevent serious burns, boiler should be thoroughly cooled before installing or servicing control.

This document provides instructions for connecting the Hydrolevel Outdoor Sensor Kit to an installed Fuel Smart HydroStat control. For information on installing the HydroStat control, please refer to the installation instructions provided with the control or log onto [www.hydrolevel.com](http://www.hydrolevel.com).

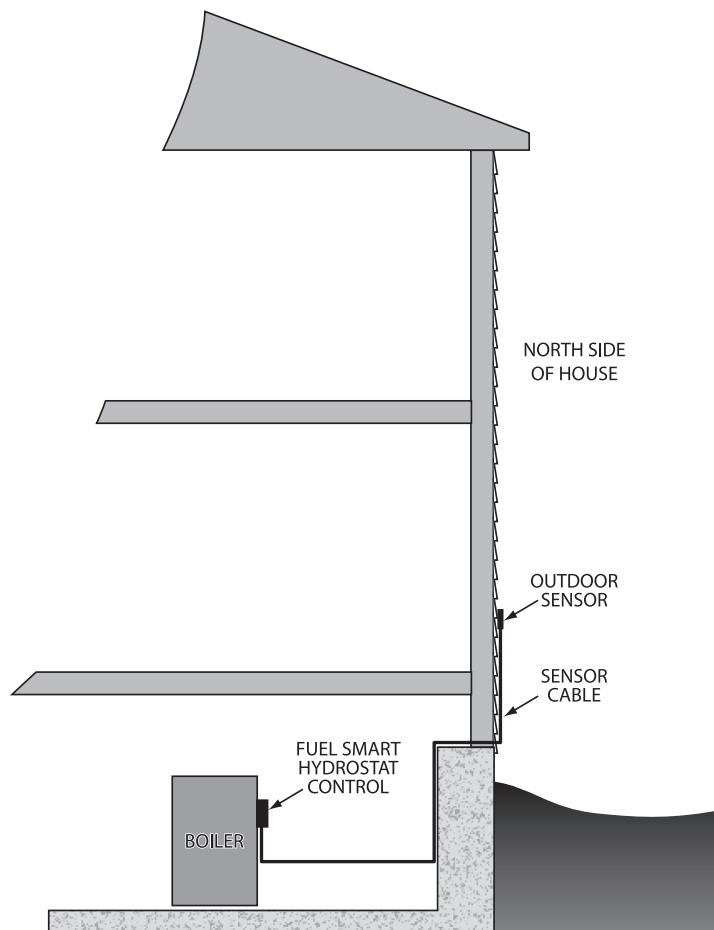

Before installation, determine the proper location for the sensor

- Sensor should be mounted on the northern outside wall of the house, shielded from direct sunlight.
- Sensor should be installed high enough off the ground to protect it from accidental damage or drifting snow.
- Sensor should be installed away from potential heat sources such as exhaust fans, windows, or doors.