

**FEATURES**

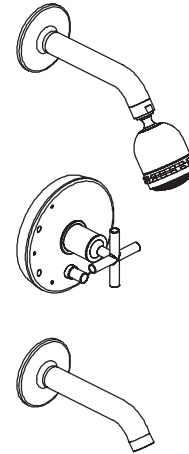
- Brass construction
- Available with cross and lever handles
- Push button diverter
- 35° and 90° spouts

**BATH AND SHOWER FAUCET TRIM**

**K-T14420**

**ALSO K-T14421, K-T14422, K-T14423,  
K-14424, K-14426, K-14427**

**ADA**



**CODES/STANDARDS APPLICABLE**

Specified model meets or exceeds the following:

- ASME/ANSI A112.18.1M
- ASSE/ANSI 1016
- CSA B125 (K-T16115, K-T6116)
- IAPMO/UPC (K-T16115, K-T6116)

**COLORS/FINISHES**

- CP Polished Chrome
- Other Refer to Faucets Price Book for additional finishes

**SPECIFIED MODEL:** For complete faucet, both faucet trim and Rite-Temp valve must be specified.







Model	Description		
K-T14420-3	Bath and Shower Trim, Cross Handle and 35° Spout (shown)	<input type="checkbox"/> CP	<input type="checkbox"/> Other____
K-T14420-4	Bath and Shower Trim, Lever Handle and 35° Spout	<input type="checkbox"/> CP	<input type="checkbox"/> Other____
K-T14421-3	Bath and Shower Trim, Cross Handle and 90° Spout	<input type="checkbox"/> CP	<input type="checkbox"/> Other____
K-T14421-4	Bath and Shower Trim, Lever Handle and 90° Spout	<input type="checkbox"/> CP	<input type="checkbox"/> Other____
K-T14422-3	Shower Only Trim, Cross Handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other____
K-T14422-4	Shower Only Trim, Lever Handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other____
K-T14423-3	Non-Diverter Valve Only Trim, Cross Handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other____
K-T14423-4	Non-Diverter Valve Only Trim, Lever Handle	<input type="checkbox"/> CP	<input type="checkbox"/> Other____
K-14424	Showerhead, Arm and Flange	<input type="checkbox"/> CP	<input type="checkbox"/> Other____
K-14426	35° Bath Spout	<input type="checkbox"/> CP	<input type="checkbox"/> Other____
K-14427	90° Bath Spout	<input type="checkbox"/> CP	<input type="checkbox"/> Other____

**Required Accessory on Page 2.**

**PRODUCT SPECIFICATION:**

Rite-Temp pressure-balancing single-control bath and shower faucet trim shall be of brass construction. Bath and shower trim shall include showerhead with arm and flange, non-diverter spout with N.P.T. connection, and faceplate with handle and push-button diverter. Shower only trim shall include showerhead with arm and flange, and faceplate with handle. Valve only trim shall include faceplate with handle. Faucet shall be K-\_\_\_\_-\_\_\_\_-\_\_\_\_ and Rite-Temp valve shall be K-\_\_\_\_-\_\_\_\_-NA.

# PURIST™

Required Accessory							
K-304-K	Rite-Temp Valve Without Stops	<input type="checkbox"/> NA					
K-304-KS	Rite-Temp Valve With Stops		<input type="checkbox"/> NA				
K-304-KP	Rite-Temp Valve With PVC Connections			<input type="checkbox"/> NA			
K-305-K	Rite-Temp Valve Without Stops				<input type="checkbox"/> NA		
K-305-KS	Rite-Temp Valve With Stops					<input type="checkbox"/> NA	
K-306-KS	HiFlow Rite-Temp Valve With Stops						<input type="checkbox"/> NA

## PRODUCT INFORMATION



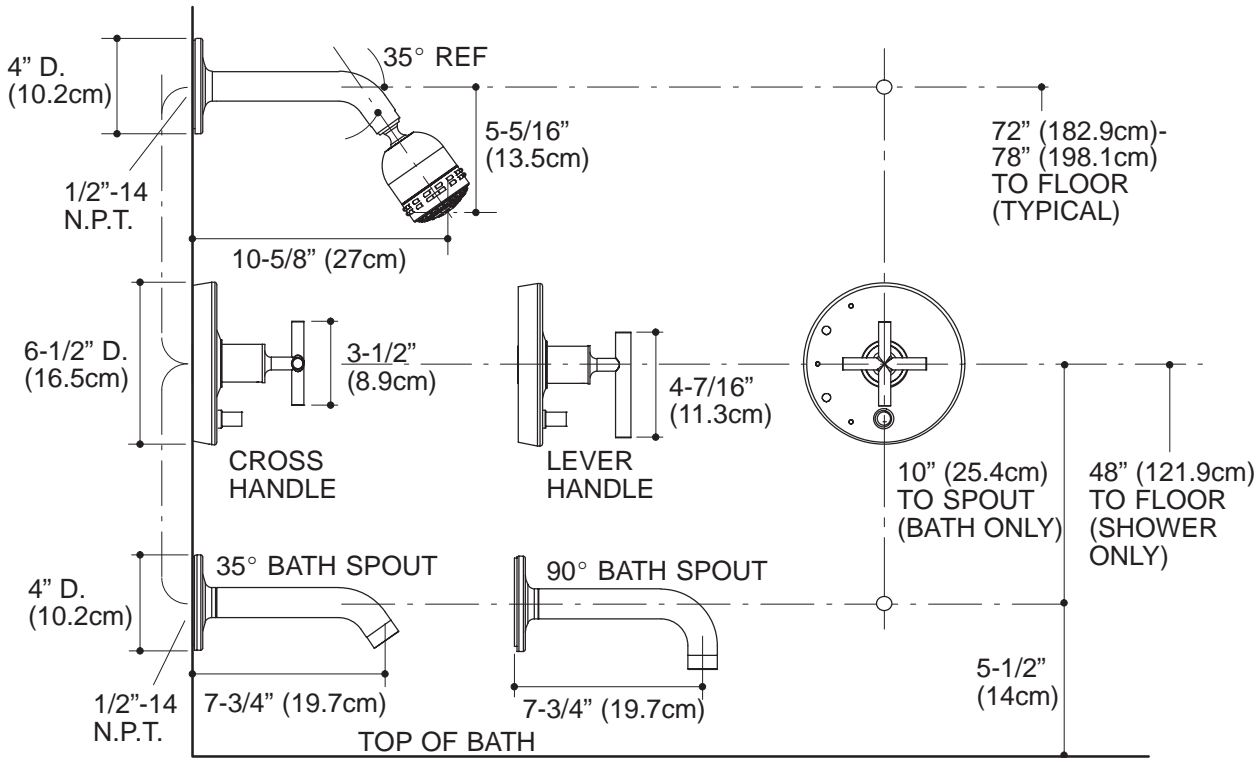
**WARNING: Risk of damage to the K-306-KS valve assembly.** When using the K-306-KS valve in a fiberglass or acrylic installation, use the thin wall installation kit (88526).

## INSTALLATION NOTES

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7" (17.8cm) to 18" (45.7cm) with single elbow between valve and wall-mount spout.



18

## PRODUCT DIAGRAM