

SideArm

(for Non-Delany Valves)

Description

Battery powered, sensor activated side mounted Retro-Fit Conversion Kit for all manual Non-Delany exposed flush valves.

Specification

- o Four (4) size "C" batteries included.
- o Infrared Sensor for ADA compliant automatic hands-free operation.
- o Arming delay of 8 seconds prevents unintentional flushes.
- o Two second flush delay.
- o Non-Hold-Open Electronic Override Push Button.
- o Chrome plated housing.
- o User in View LED indicator.
- o Installation tool provided.
- o Angled sensor window.
- o Optional 24-hour sentinel flush.
- o Sensor range adjustable and reset button
- o Low battery indicator LED.




USER-IN-VIEW LED Green light flashes 3 times, after 5 seconds delay, when a user is in view. The Green light flashes constantly when a user is in view during the 7 minutes start up sequence.

BATTERY LED Yellow light flashes indicates it is time to replace batteries with (4) "C" size alkaline batteries.

OBJECT LOCK SENSOR Detects user.

COURTESY MANUAL FLUSH BUTTON Allows manual activation of the flush valve when needed.

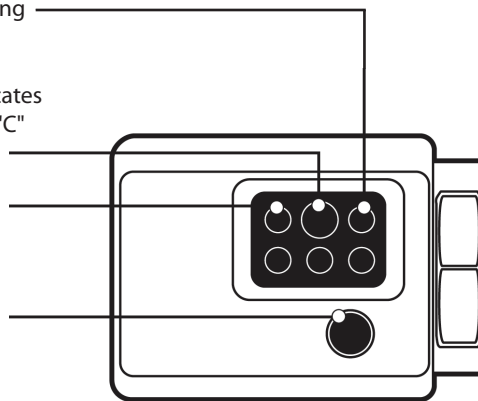

* Recommended for both hard water and highly chlorinated water conditions.

