For Residential and Commercial Applications			
Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

B3-48DW Speedi Plumb® PLUS Braided Dishwasher Connector - Compression x Female Iron Pipe

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- Engineered polymer braided fibers bend freely without kinking or crimping
- Reinforced PVC inner hose ensures durability
- Rubber washers provide a large pliable sealing surface and ensure a long lasting water-tight connection
- 8-sided pneumatic crimp provides greater dependability for realible nut-to-hose connections
- 🗹 100% No Lead

Operating Specifications:

Temperature: 40°-140° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)

MATERIAL SPECIFICATIONS		
Inner Hose	Reinforced PVC	
Braiding	PVC coated polyester yarn	
Barb	Compliant brass	
Ferrule	Zinc-plated steel	
Nut	Brass, chrome plated	
Washer	Rubber	
Compression Nut	Brass, chrome plated	






B3-48DW F 1/2" compression x 1/2" FIP or 7/16" rubber slip nut x 12" length



B3-48DW Speedi Plumb® PLUS Braided Dishwasher Connector -**Compression x Female Iron Pipe**

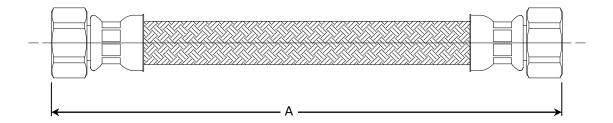

PART DIMENSIONS (Inches)		
Model	DIM. A	
B3-48DW	48.0 / 49.0	

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01







