

A **KOHLER**, COMPANY

**ENSEMBLETM** 

Features

 $\bullet$  Compression molded from our exclusive solid Vikrell\_ $\!(\!_{\circledcirc}$  material

- Durable high-gloss finish
- · Left or right drain
- 10-year consumer/3-year commercial limited warranty
- 60-1/4" (153 cm) x 30" (76.2 cm) X 5" (12.7 cm) receptor rough-in dimensions include nailing flange
- 60" (152.4 cm) X 30" (76.2 cm) X 4" (10.2 cm) unit finished dimensions


60" (152.4 cm) x 30" (76.2 cm) SHOWER RECEPTOR 72141110 ALSO 72141120



# **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- CSA B45
- ASTM E162
- ASTM E662



### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

## **Specified Model**

Model	Description	Colors/Finishes	
72141110	60" (152.4 cm) x 30" (76.2 cm) shower receptor, left drain	□ 0	☐ Other
72141120	60" (152.4 cm) x 30" (76.2 cm) shower receptor, right drain	<b>0</b>	□ Other

### **ENSEMBLETM**

#### **Technical Information**

Basin area	Weight	Drain Outlet
56-1/2" (143.5 cm) x	38 lbs	3-5/16" (8.4 cm)
24-5/16" (61.8 cm)	(17 kg)	OD


#### **Installation Notes**


used.

Install this product according to the installation guide. Size the drain cutout to fit the drain assembly that will be

Double studding is recommended for pivot shower door installations.

Studs should be positioned as shown.

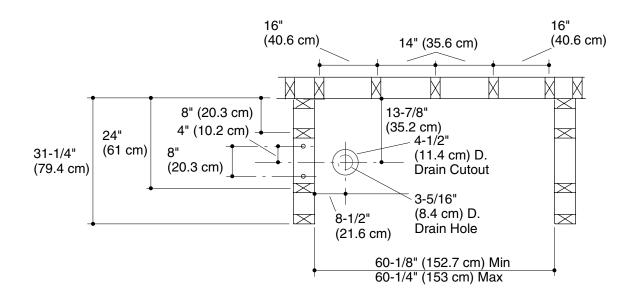

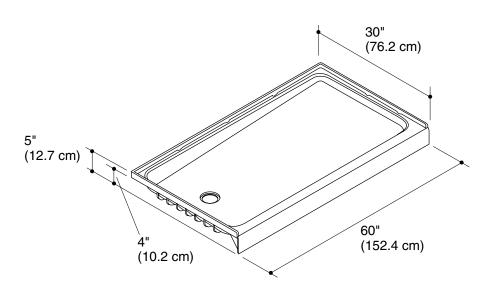

## **Product Diagram**

