

## Features

- 0.5 gpm (1.9 lpm) maximum flow rate at 80 psi (5.5 bar).

## Material

- Brass construction.
- For single-hole installation.
- One-piece, self-contained ceramic disc valve which allows both volume and temperature setting.
- Temperature memory allows the faucet to be turned on and off at any temperature setting.
- 4-3/8" (111 mm) spout reach.
- Stationary spout.
- Metal grid drain with metal tailpiece.
- Flexible connections.

## Recommended Products/Accessories

K-23726 Drain treatment  
K-23723 Faucet cleaner



ADA

CSA B651

OBC

## Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI 61  
NSF/ANSI 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


## Available Colors/Finishes

*Color tiles intended for reference only.*

### Color Code Description



CP Polished Chrome

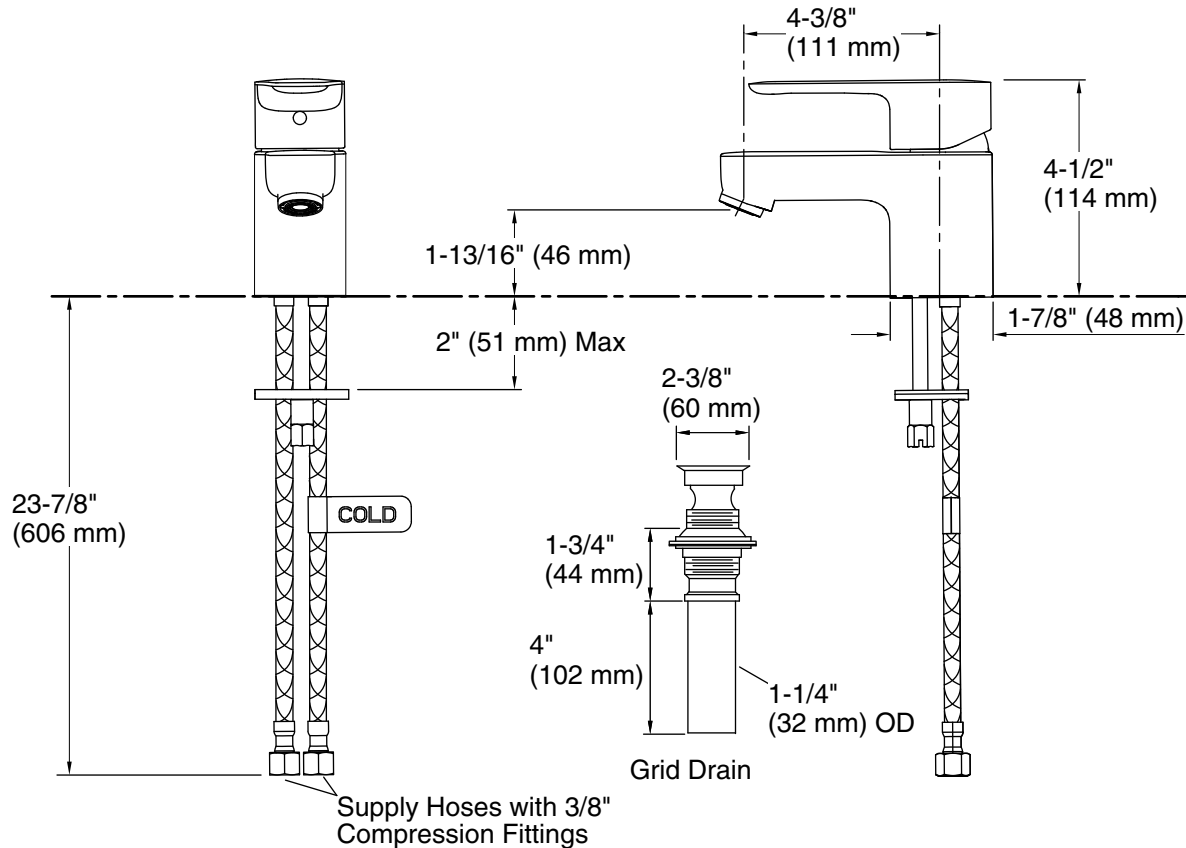

## Technical Information

All product dimensions are nominal.

### Faucet:

Flow rate:	0.5 gal/min (1.9 l/min)
Pressure:	80 psi (5.5 bar)
Drain included:	Yes
Drain with overflow:	Yes
Drain tailpiece included:	Yes

### Spout:

Spout reach:	4-3/8" (112 mm)
--------------	-----------------

## Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.