




# Location:



## 5506-TRM, 5506TRMTC Tub/Shower/Hand Shower Trim Specification Submittal

Feature Highlights	Options/Modifications
<ul style="list-style-type: none"> <li>• Elm Tub/Shower/Hand Shower Trim</li> <li>• Requires Temptrol® Pressure Balancing Tub/Shower Valve</li> <li>• Requires Symmons Triple Outlet Diverter Valve</li> <li>• Metal lever handles</li> <li>• Cradle for hand shower wand</li> <li>• 5-7/8" non-diverter tub spout</li> <li>• Dual checks for backflow protection</li> <li>• 60" flexible metal hose</li> <li>• 3 mode hand shower wand</li> <li>• 5 mode showerhead</li> <li>• 2.0 gpm (7.6 L/min) flow restrictors</li> <li>• Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish</li> <li>• Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 5506TRMTC)</li> <li>• For optional in-line vacuum breaker order p/n EF-109</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> <b>-1.5</b>  1.5 gpm (5.7 L/min) flow restrictor</li> <li><input type="checkbox"/> <b>-L1</b> Less showerhead</li> <li><input type="checkbox"/> <b>-L2</b> Less hand shower wand</li> <li><input type="checkbox"/> <b>-L3</b> Less showerhead &amp; hand shower wand</li> <li><input type="checkbox"/> <b>-L5</b> Less hand shower system</li> <li><input type="checkbox"/> <b>-SBZ</b> Seasoned Bronze</li> <li><input type="checkbox"/> <b>-STN</b> Satin Nickel finish</li> </ul> <p><b>Note:</b> Append appropriate -suffix to model number.</p>
Model Numbers	Warranty
<ul style="list-style-type: none"> <li><input type="checkbox"/> <b>5506-TRM</b> Tub/Shower/Hand Shower Trim, Temptrol Pressure Balancing Tub/Shower Valve and Symmons Triple Outlet Diverter valve ordered separately</li> <li><input type="checkbox"/> <b>5506TRMTC</b> Tub/Shower/Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap</li> </ul>	<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p> 
Compliance	
<ul style="list-style-type: none"> <li>• ASME A112.18.1/CSA B125.1</li> </ul> 	

## Architectural/ Engineering Specification


Symmons \_\_\_\_\_ With Elm Tub/Shower/Hand Shower Trim, requires Temptrol® pressure balancing Tub/shower valve, Requires Symmons Triple Outlet Diverter Valve, metal lever handle, Cradle for hand shower wand, 5-7/8" non-diverter tub spout, Dual checks for backflow protection, 60" flexible metal hose, 3 mode hand shower wand, 5 mode showerhead, 2.0 gpm (7.6 L/min) flow restrictor, Tub spout not included, components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 5506TRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, Complaint. Available options include "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower wand", "L3 - Less showerhead & hand shower wand", "L5 - Less hand shower system", "SBZ - Seasoned Bronze", "STN - Satin nickel finish".



**SYMMONS<sup>®</sup> Elm<sup>®</sup>**

5506-TRM, 5506TRMTC

**Dimensions**

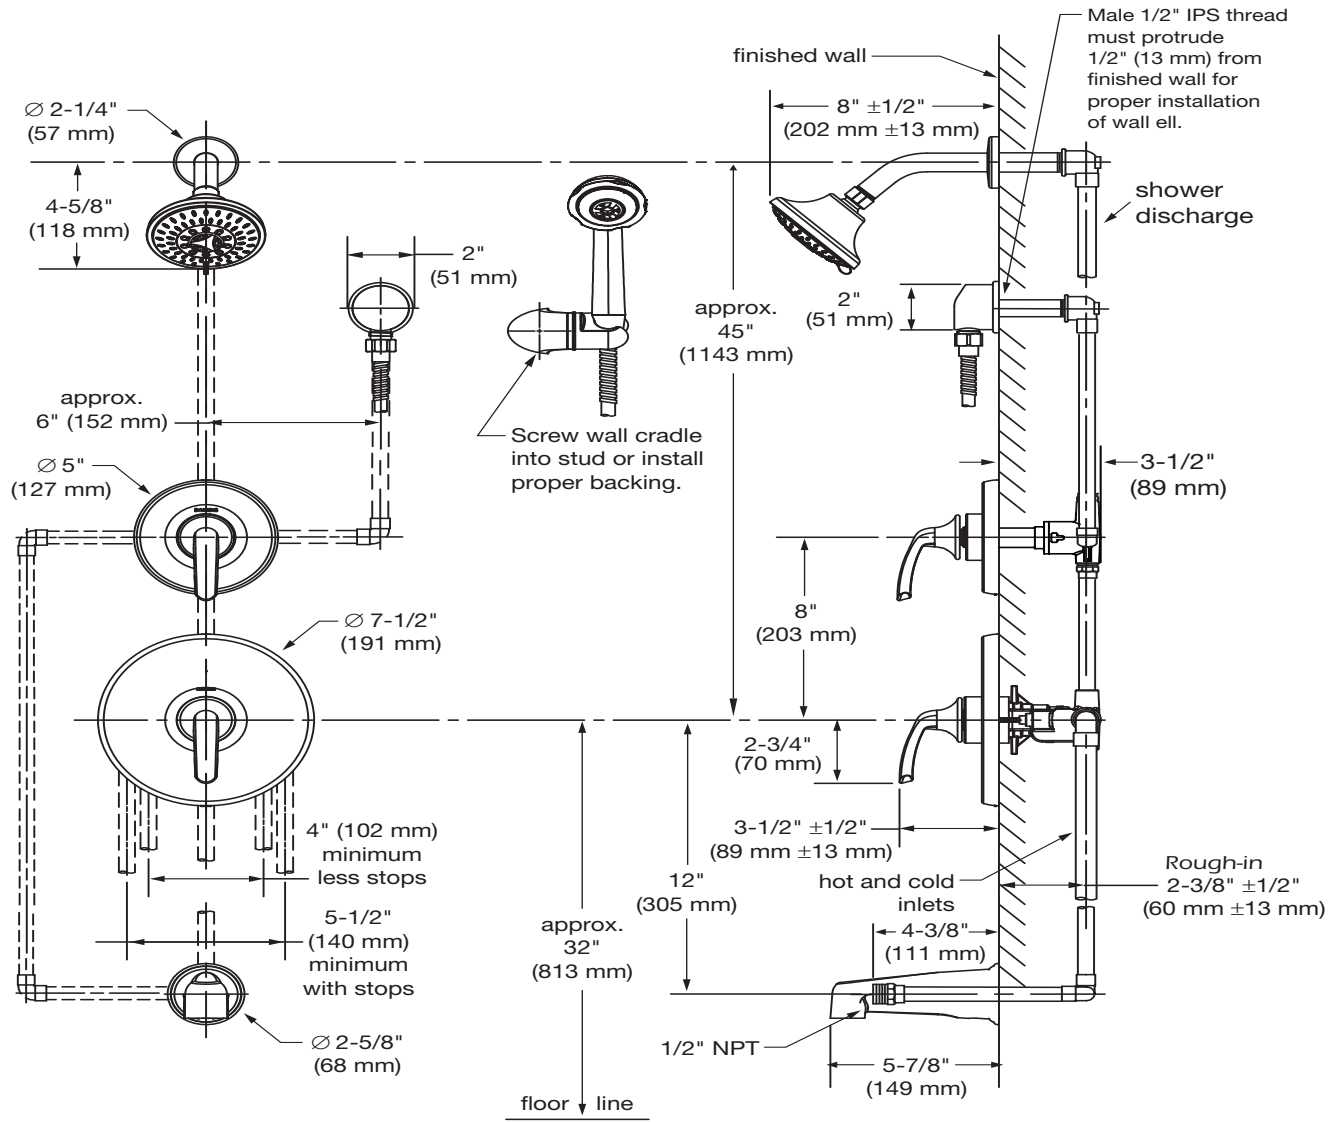

**Notes:**

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.