


Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_



▲ Designate proper finish suffix

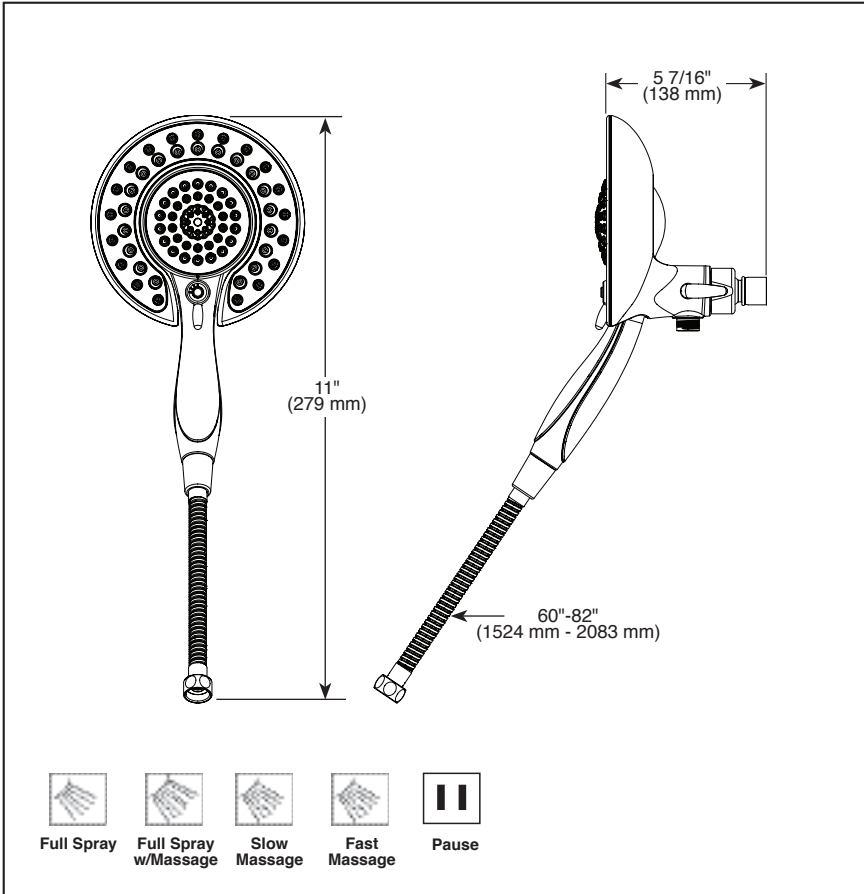

see what Delta can do™

**IN2ITION®**

- 2-In-1 Shower
- Certified Dual Check Valves

**STANDARD SPECIFICATIONS:**

- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Integrated handshower docks securely into showerhead when not in use
- Multiple handshower spray settings and pause feature
- 60"-82" (1524 mm - 2083 mm) metal stretchable hose
- Hand held shower with 5 spray settings - pause is a non-positive shut-off
- Diverter allows for single or shared operation of showerhead and handshower

**WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



**COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®