

### Features

- Fast-Response™ technology produces a luxurious steam shower in 60 seconds
- Power Clean™ technology offers one-touch automatic cleaning and safe maintenance
- Constant Steam produces steam at a consistent rate, which greatly minimizes temperature fluctuations
- The Invigoration Series uses approximately one gallon of water per 20-minute session, which is significantly less water than a traditional shower experience
- To ensure safety, the system automatically shuts down after 20 minutes if not reactivated by the user
- Requires K-5557 Invigoration Steam Generator Control Kit or K-5548-K1 DTV+ Steam Adapter Kit (sold separately)

### Material

- Generator is constructed of insulated stainless steel, which maintains the temperature while ensuring the case is safe to the touch
- KOHLER finishes resist corrosion and tarnishing

### Installation

- 500 cubic feet maximum volume rating for custom showering applications




### Codes/Standards

UL 499  
CSA C22.2 No. 64

### KOHLER® Steam Generator Three-Year Limited Warranty

See website for detailed warranty information.

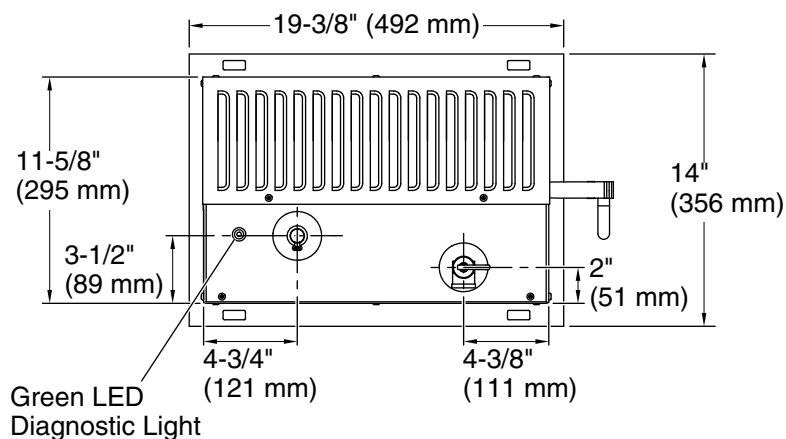


Minimum required access panel is  
24\" (610 mm) L x 15\" (381 mm) H.

Allow for a minimum of 12\" (305 mm) of  
space around all sides of the steam generator.

Allow for the drain/spill pan.

KOHLER® drain pan (shown) sold separately.

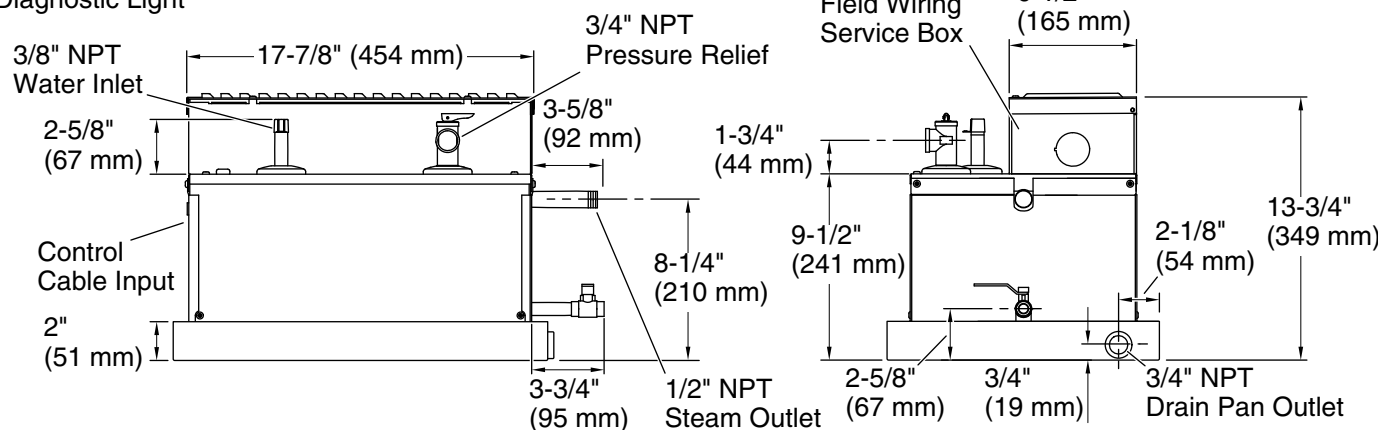

### Required Electrical Service

One dedicated circuit required.

240 V, 90 A, 50/60 Hz

### Technical Information

All product dimensions are nominal.

Power source: Hardwire - AC, not included

Max. Ambient temp: 104°F (40°C)

Max. Relative  
humidity non-  
condensing: 95%

### Notes

Install this product according to the installation  
guide.

Steam room volume for this generator is 500  
cubic feet (14.2 cubic meters).

For every foot of ceiling height over 8 ft (2.4 m),  
use the next larger steam unit.

For optimum performance, the steam generator  
must be installed within 25 ft (7.62 m) of the  
steam head.

Recommended feed water quality should be:  
Hardness: 60 ppm (3.4 gpg). Total Alkalinity:  
150 ppm (8.8 gpg). To ensure proper operation,  
the feed water supply should be tested prior to  
operating the steam generator. If feed water  
quality is not within the specified limit, contact  
a reputable water treatment company for  
treatment options.

Maximum inlet pressure is not to exceed 70 psi  
(483 kPa).

For supply connection, use 90 degree C copper