

MOEN®

Specifications

DESCRIPTION

- Various finishes identified by suffix
- Handheld shower
- 69" double interlock spiral hose (metal)
- 30" slide bar with push button height selection
- Assembled with two check valves for back flow prevention

OPERATION

- 5-function: Full spray, relaxing massage, massage, rinse and downpour: rotate outer ring to select
- Handshower holder rotates to adjust angle of hand shower

FLOW


- EP suffix models are limited to 1.75 gpm (6.7 L/min) max

STANDARDS

- Designed and manufactured to comply with the applicable requirements of ASME A112.18.1/CSA B-125.1 and ASSE 1014 and all applicable specifications referenced therein
- EP suffix models are third party certified to WaterSense®



WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

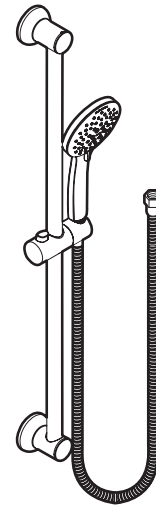

**5-Function Handshower
w/Slide Bar**

Models: 3558EP series

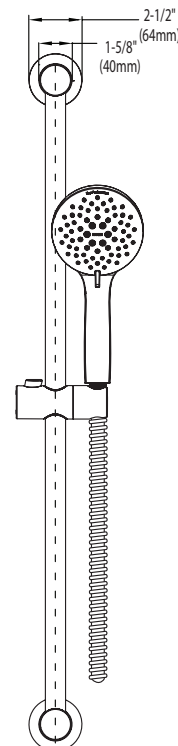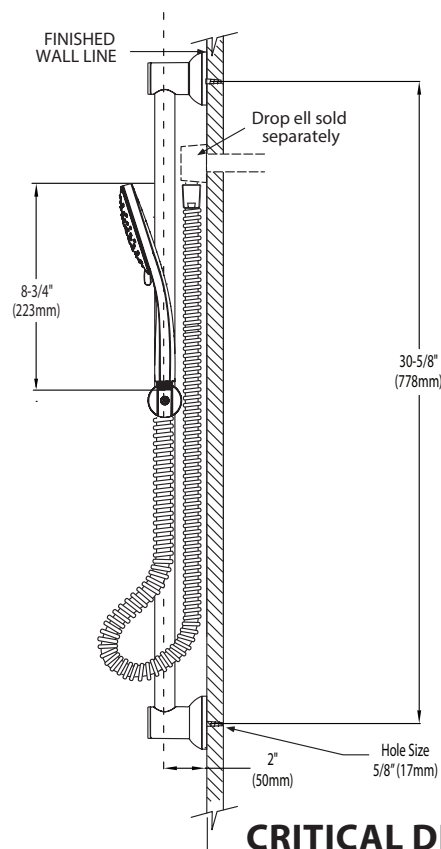

CRITICAL DIMENSIONS

(DO NOT SCALE)