



- ❑ **060304A**  610mm (24") stainless steel slide bar, 1778 mm (70") white vinyl hose, push button handshower head with back flow protection, wall supply elbow & flange.
- ❑ **060306A**  As above but with 914 mm (36") stainless steel slide bar.



**Specification: (example)**

Handshower head with push button pause. Back flow protection provided by two integral certified check valves in series, which operate independently and are non-serviceable, ASME A112.18.3 and ASME A112.18.1 / CSA B125.1.

- ❑ **RP7405** – 2.5 USGPM (9.5 L/min.) (See Shower No. 5 and Product Variation No. 3 & 9 on T17TH Series)
- ❑ **061049A** – 1.5 USGPM (5.7 L/min.) (See Shower No. 5 and Product Variation No. 3 & 9 on T13H Series)

- ❑ **RP7406** Swivel handshower connector with hole for vertical mounting pin, 1/2" NPS inlet & outlet, plastic and chrome plated.



- ❑ **RP12504** Brass wallmounted bracket, vertical mounting pin, polished chrome plated finish.




- ❑ **060303A** Brass wallmounted elbow, flange, polished chrome plated finish, 1/2" NPT inlet & outlet.



- ❑ **060798A** 1/2" NPT inlet/outlet polished chrome plated brass atmospheric in-line vacuum breaker. Certified under ANSI A1121.3 (ASSE 1011).



**FLOW RATE vs PRESSURE**

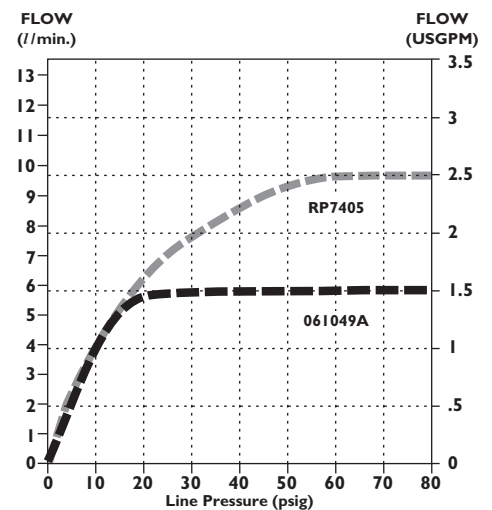

- ❑ **060312A** 1778mm (70") long white vinyl handshower hose, nylon reinforced.
- ❑ **060731A** 1753mm (69") long chrome plated brass double spiral handshower hose.
- ❑ **060252A** Quick disconnect connectors for handshower hose.



Note: Measurements may vary ± 6mm (0.25")