

### Features

- High-arch swing spout with 155° rotation offers superior clearance for filling pitchers, chilling bottles and cleanup.
- Single lever handle makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).

### Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

### Installation

- Single-hole installation (3-hole escutcheon sold separately).
- Flexible supply lines simplify installation.

### Adapters, Rough-in and Extension Kits

1327990

Range: 2-1/2" (64 mm) -4-5/8" (117 mm)

### **Recommended Products/Accessories**

K-77685 Single-Cartridge Water Filtration System K-77686 Double-Cartridge Water Filtration System K-77687 single replacement filter cartridge K-77688 Replacement Filter Cartridges, Two-Pack

### **Optional Products/Accessories**

K-24461 Three-hole kitchen faucet escutcheon



Single-handle bar sink faucet

Tone™

K-23767



### **Codes/Standards**

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

## KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes


Color tiles intended for reference only.

#### **Color Code Description** CP Polished Chrome VS Vibrant® Stainless BL Matte Black Vibrant® Brushed Moderne 2MB Brass Matte Black with Moderne BMB Brass Matte Black with Polished CBL Chrome



# KOHLER. Faucets

Tone™ Single-handle bar sink faucet K-23767

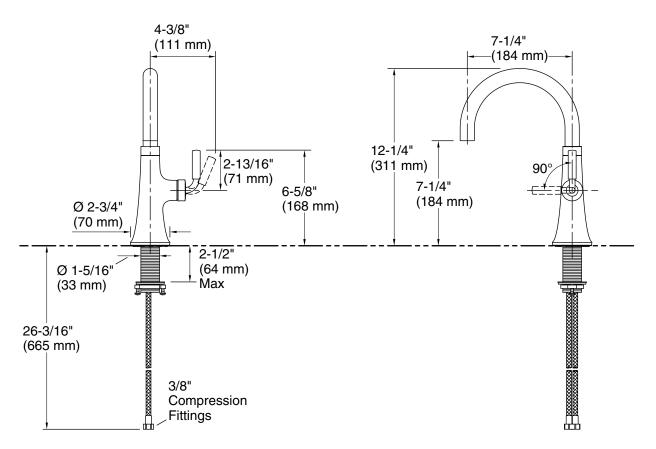

### **Technical Information**

All product dimensions are nominal.

### Notes

Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

