

MXZ-3D24NLHZ

23,600 BTU/H HYPER HEAT PUMP OUTDOOR UNIT



Job Name:

System Reference:

Date:



GENERAL FEATURES

- INVERTER-driven compressor: An inverter-driven compressor generates the precise capacity needed to maintain a temperature set point.
- Thermal Differential 1°F
- Seacoast protection: Seacoast protection on heat exchanger and base panel (rated for 2,000 hrs. in accordance with ASTM B117 testing)
- Quiet operation: Outdoor units are as quiet as a typical conversation, and most indoor units are whisper quiet.
- Hyper-Heating INVERTER®: Hyper-heating performance offers 100% heating capacity at 5°F and 75% heating capacity at -13°F
- Fan motor overheating/voltage protection
- Compressor thermal protection
- Compressor overcurrent detection
- Built-in base pan heater
- High pressure protection

Specifications			System
Unit Type			MXZ-3D24NLHZ
Cooling at 95F ¹ (Non-Ducted // Mixed // Ducted)	Maximum Capacity	Btu/h	23,600 // 23,600 // 23,600
	Rated Capacity	Btu/h	22,000 // 22,800 // 23,600
	Minimum Capacity	Btu/h	11,600 // 11,600 // 11,600
	Maximum Power Input	W	2,760 // 3,080 // 3,400
	Rated Power Input	W	1,693 // 2,027 // 2,360
	Power Factor (208V)	%	0.99 // 0.99 // 0.99
	Power Factor (230V)	%	0.99 // 0.99 // 0.99
Heating at 47F ² (Non-Ducted // Mixed // Ducted)	Maximum Capacity	Btu/h	30,600 // 30,600 // 30,600
	Rated Capacity	Btu/h	25,000 // 24,800 // 24,600
	Minimum Capacity	Btu/h	12,800 // 12,800 // 12,800
	Maximum Power Input	W	2,890 // 3,715 // 4,540
	Rated Power Input	W	2,094 // 2,139 // 2,185
	Power Factor (208V)	%	0.99 // 0.99 // 0.99
	Power Factor (230V)	%	0.99 // 0.99 // 0.99
Heating at 17F ³ (Non-Ducted // Mixed // Ducted)	Maximum Capacity	Btu/h	25,000 // 24,800 // 24,600
	Rated Capacity	Btu/h	15,400 // 15,400 // 15,400
	Maximum Power Input	W	3,627 // 3,711 // 3,795
	Rated Power Input	W	1,590 // 1,776 // 2,015
Heating at 5F ⁴ (Non-Ducted // Mixed // Ducted)	Maximum Capacity	Btu/h	25,000 // 24,800 // 24,600
	Maximum Power Input	W	3,627 // 3,950 // 4,350
Heating at -13F ⁵ (Non-Ducted // Mixed // Ducted)	Maximum Capacity	Btu/h	20,400 // 20,200 // 20,000
	Maximum Power Input	W	2,955 // 3,317 // 3,678
Efficiency (Non-Ducted // Mixed // Ducted)	SEER ² ¹		20 // 17.20 // 14.40
	EER ² ¹		13 // 11.50 // 10
	HSPF ² (IV) ²		10 // 9 // 8
	COP at 47°F ²		3.50 // 3.40 // 3.30
	COP at 17°F at Maximum Capacity ³		2.02 // 1.94 // 1.88
	COP at 5°F at Maximum Capacity ⁴		2.02 // 1.84 // 1.66
	ENERGY STAR® Certified		Yes // Yes // No
Electrical	Electrical Power Requirements	V AC / V AC, ø, Hz	208 / 230, 1, 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	24
	Recommended Wire Size (Indoor - Outdoor)	AWG	14
	Short-circuit Current Rating (SCCR)	kA	5
	Recommended Fuse/Breaker Size	A	25
	MCA	A	29
	MOCP	A	49

NOTES

¹Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)

²Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)

³Heating at 17°F (Indoor: 70°F DB, 60°F WB // Outdoor: 17°F DB, 15°F WB)

⁴Heating at 5°F (Indoor: 70°F DB, 60°F WB // Outdoor: 5°F DB, 4°F WB)

⁵Heating at -13°F (Indoor: 70°F DB, 60°F WB // Outdoor: -13°F DB, -14°F WB)

Capacity varies based on the number of indoor units operating and the model of the Multi-zone Outdoor Unit. For reference to connected capacity charts, please refer to Multi-zone Outdoor Unit Operational Performance.

For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance.

Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity.

Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.

¹ Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]):

• Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

** Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures):

• System cuts out in heating mode and automatically restarts at these temperatures.

SPECIFICATIONS: MXZ-3D24NLHZ

Specifications			System
Unit Type			MXZ-3D24NLHZ
Outdoor Unit	Fan Motor Full Load Amperage	A	1.74
	Fan Motor Output	W	88
	Defrost Method		Reverse Cycle
	Blue Fin Heat Exchanger Coating		Yes
	Airflow Rate Cooling/Heating	CFM	2,239 / 2,378
	Sound Pressure Level, Cooling ¹	dB (A)	56
	Sound Pressure Level, Heating ²	dB (A)	58
	Compressor Type		Twin Rotary
	Compressor Model		SRB280FDRMC
	Compressor Oil Type // Charge	Type // oz	RM68EH // 23.7
	External Finish Color		Munsell 3.0Y 7.8/1.1
	Base Pan Heater		Built-in
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	37-13/32 x 13 x 31-11/32 [950 x 330 x 796]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	41-11/32 x 17-5/16 x 38-31/32 [1,050 x 440 x 990]
ODU Operating Temp. Range	Unit Weight	lbs [kg]	152 [69]
	Package Weight	lbs [kg]	178 [81]
	Cooling Intake Air Temp (Maximum / Minimum ³)	°FDB	115 / 14
	Cooling Thermal Lock-out / Re-start Temperatures	°FDB	10 / 14
	Heating Intake Air Temp [Maximum / Minimum]	°FDB, °FWB / °FDB, °FWB	75, 65 / -13, -14
Refrigerant	Heating Thermal Lock-out / Re-start Temperatures**	°FDB	-22.5 / -14
	Type		R454B
	Pre-Charged Refrigerant Amount	lbs, oz	6, 3
IDU Connection	Maximum Pre-Charged Piping Length	ft	230
	Minimum Number of Connected IDU		2
	Maximum Number of Connected IDU		3
	Minimum Connected Capacity	Btu/h	12,000
	Maximum connected capacity	Btu/h	28,000
Piping	Liquid Pipe Size O.D. (Flared)	inch	A: 1/4 B: 1/4 C: 1/4
	Gas Pipe Size O.D. (Flared)	inch	A: 1/2 B: 3/8 C: 3/8
	Total Piping Length	ft [m]	230 [70]
	Farthest Piping Length	ft [m]	82 [25]
	Maximum Height Difference ⁴ , ODU above IDU	ft [m]	49 [15]
	Maximum Height Difference ⁴ , ODU below IDU	ft [m]	49 [15]
	Maximum Number of Bends for IDU		70

NOTES

¹Cooling at 95°F (Indoor: 80°F DB, 67°F WB // Outdoor: 95°F DB, 75°F WB)

²Heating at 47°F (Indoor: 70°F DB, 60°F WB // Outdoor: 47°F DB, 43°F WB)

³Heating at 17°F (Indoor: 70°F DB, 60°F WB // Outdoor: 17°F DB, 15°F WB)

⁴Heating at 5°F (Indoor: 70°F DB, 60°F WB // Outdoor: 5°F DB, 4°F WB)

⁵Heating at -13°F (Indoor: 70°F DB, 60°F WB // Outdoor: -13°F DB, -14°F WB)

Capacity varies based on the number of indoor units operating and the model of the Multi-zone Outdoor Unit. For reference to connected capacity charts, please refer to Multi-zone Outdoor Unit Operational Performance.

For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance.

Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity.

Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.

^{*} Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]):

• Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

^{**} Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures):


• System cuts out in heating mode and automatically restarts at these temperatures.

OUTDOOR UNIT ACCESSORIES: MXZ-3D24NLHZ

Ball Valve	Refrigeration Ball Valve - 1/2	BV12FFSI2
	Refrigeration Ball Valve - 1/4	BV14FFSI2
	Refrigeration Ball Valve - 3/8	BV38FFSI2
	Refrigeration Ball Valve - 5/8	BV58FFSI2
Port Adaptor	Adaptor 1/2 x 3/8	PAC-SK88RJ-E
	Adaptor 1/2 x 5/8	PAC-SK89RJ-E
	Adaptor 1/4 x 3/8	PAC-493PI
	Adaptor 3/8 x 1/2	ADP3812
	Adaptor 3/8 x 5/8	PAC-SK90RJ-E
Control/Service Tool	Maintenance Tool Interface	PAC-USCMS-MN-1
Mini-Split Wire	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	SW144-250
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	SW144-50
	14 Gauge 4 wire MiniSplit Cable250 ft roll	S144-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	S144-50
	16 Gauge 4 wire Armored MiniSplit Cable250 ft roll	SW164-250
	16 Gauge 4 wire Armored MiniSplit Cable50 ft roll	SW164-50
	16 Gauge 4 wire MiniSplit Cable250 ft roll	S164-250
	16 Gauge 4 wire MiniSplit Cable50 ft roll	S164-50
Stand	18 Single Fan Stand	QSMS1801M
	24 Single Fan Stand	QSMS2401M
	Condenser Wall Bracket	QSWB2000M-1
	Condenser Wall Bracket - Stainless Steel Finish	QSWBSS
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	DSD-400P
	Outdoor Unit Stand 12 High	QSMS1201M
Mounting Pad	Condensing Unit Mounting Pad 16 x 36 x 3	ULTRILITE1
Air Outlet Guide	Air Outlet Guide 1 Piece	PAC-SH96SG-E
Snow/Rain Diverter	SnowRain Diverter	SRD-4
Control Interface	M-NET Interface for MXZ	PAC-IF01MNT-E
Hail Guards	Hail Guard	HG-A9
Drain Socket	Drain Socket	PAC-SG60DS-E
NOTES		

OUTDOOR UNIT DIMENSIONS: MXZ-3D24NLHZ

MXZ-3D24NLHZ-U1
MXZ-3D30NLHZ-U1

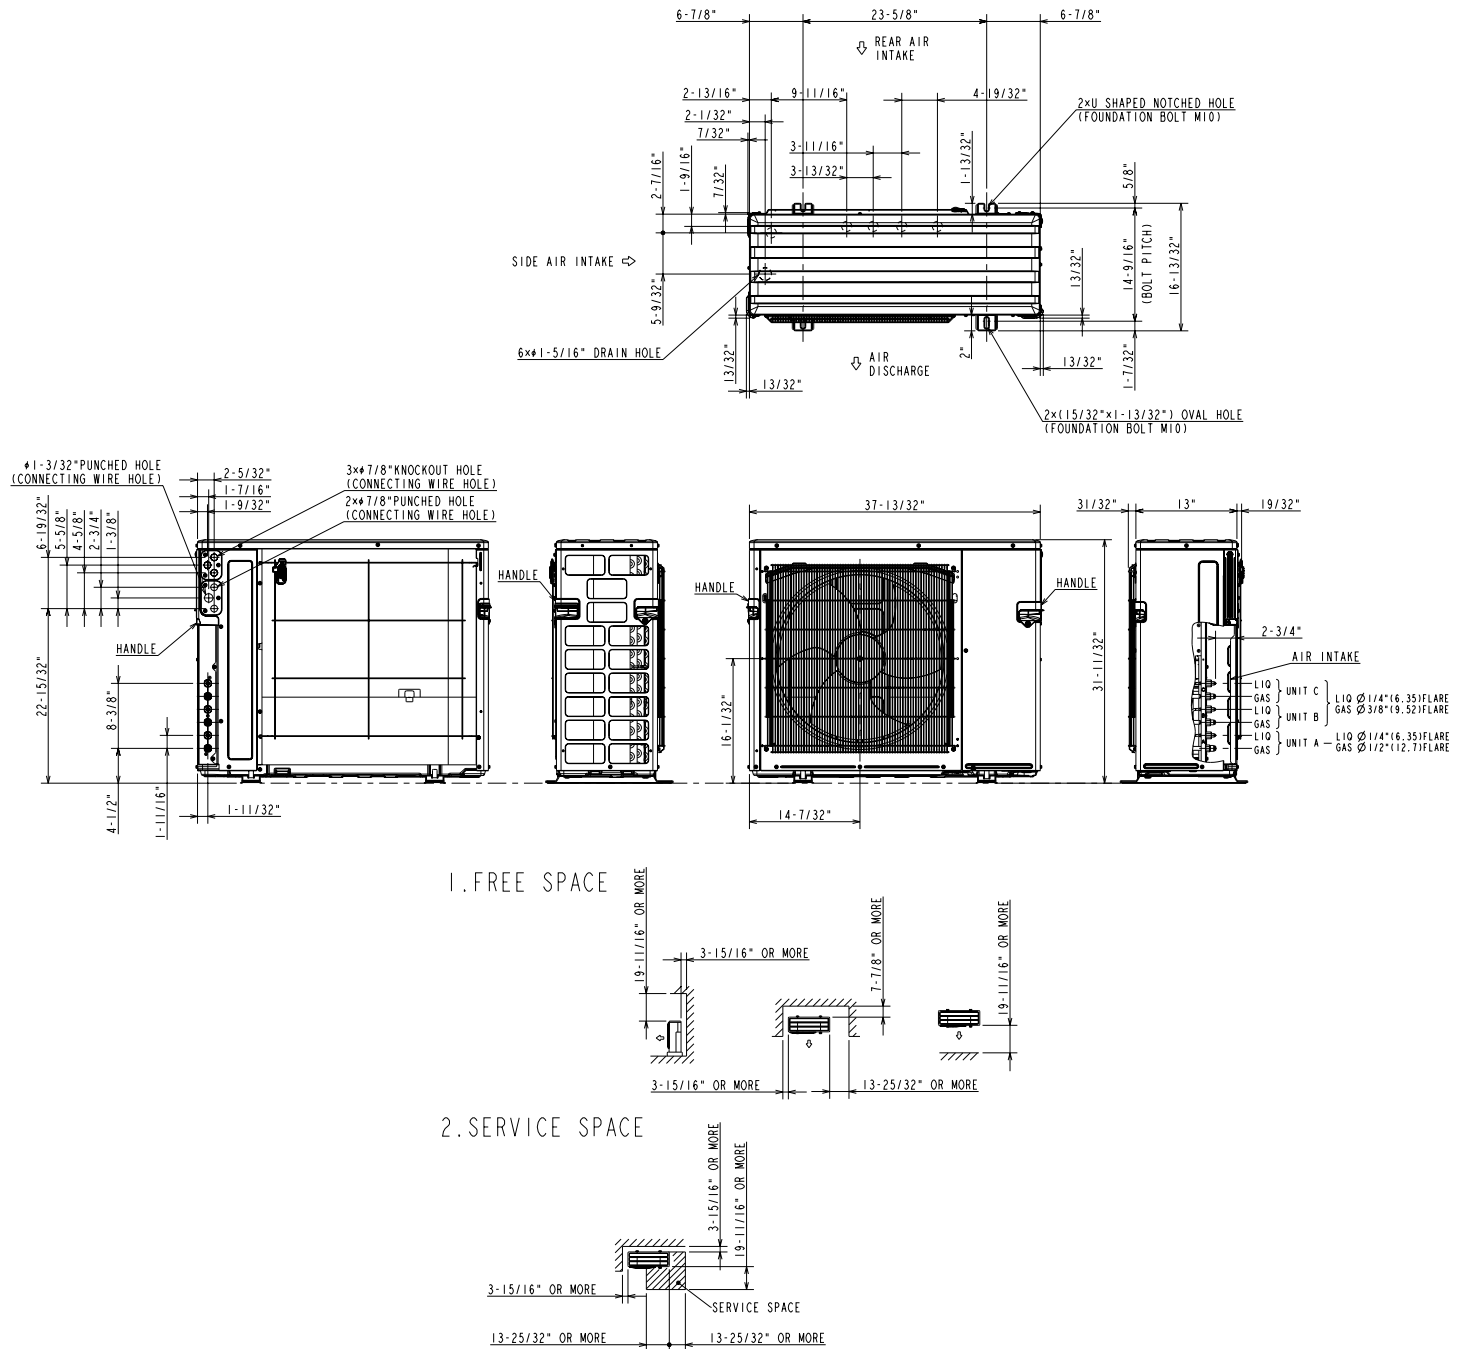

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 <https://mitsubishicomfort.com>



METUS_2025-07_PROPIN