

Location:



# Shower System 1-100, 1-100-TRM Specification Submittal



## Feature Highlights

- Symmons shower system with Symmons Safetymix pressure balancing mixing valve and lever style handle. Valve includes adjustable stop screw to limit handle turn.
- Super showerhead #4-231, single mode with adjustable flood or mist spray.
- Showerhead arm and flange.
- Standard flow rate 2.0 gpm (7.6 L/min)  
*Optional lower flow rate restrictor available*
- Polished chrome finish

## Model Numbers

- 1-100  
Shower System with Symmons Safetymix pressure balancing mixing valve
- 1-100-TRM  
Shower Trim only, Symmons Safetymix pressure balancing mixing valve ordered separately

## Finish Options

*Append appropriate -suffix to model number.*  
- Polished chrome finish (standard)

## Standards / Certifications


ASME A112.18.1/CSA B125.1



## Options / Modifications

*Append appropriate -suffix to model number.*

- CG** **-1.5** 1.5 gpm (5.7 L/min) flow restrictor
- L1** Less showerhead
- E** External volume control on showerhead
- VP** Vandal resistant escutcheon screws in place of standard screws
- X** Integral stops - allows water shut off at valve for service. Recommended for use on all multiple commercial installations
- X-3/4"** 3/4" valve to increase flow approximately 20%
- X-CHKS** Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve
- 150** Senior showerhead #4-150
- 151** Institutional Showerhead #4-151
- 295** Institutional Showerhead #4-295
- VT** Visu-Temp Pressure-Balancing mixing valve with integral thermometer #VT-1
- L4** Less head, arm and flange

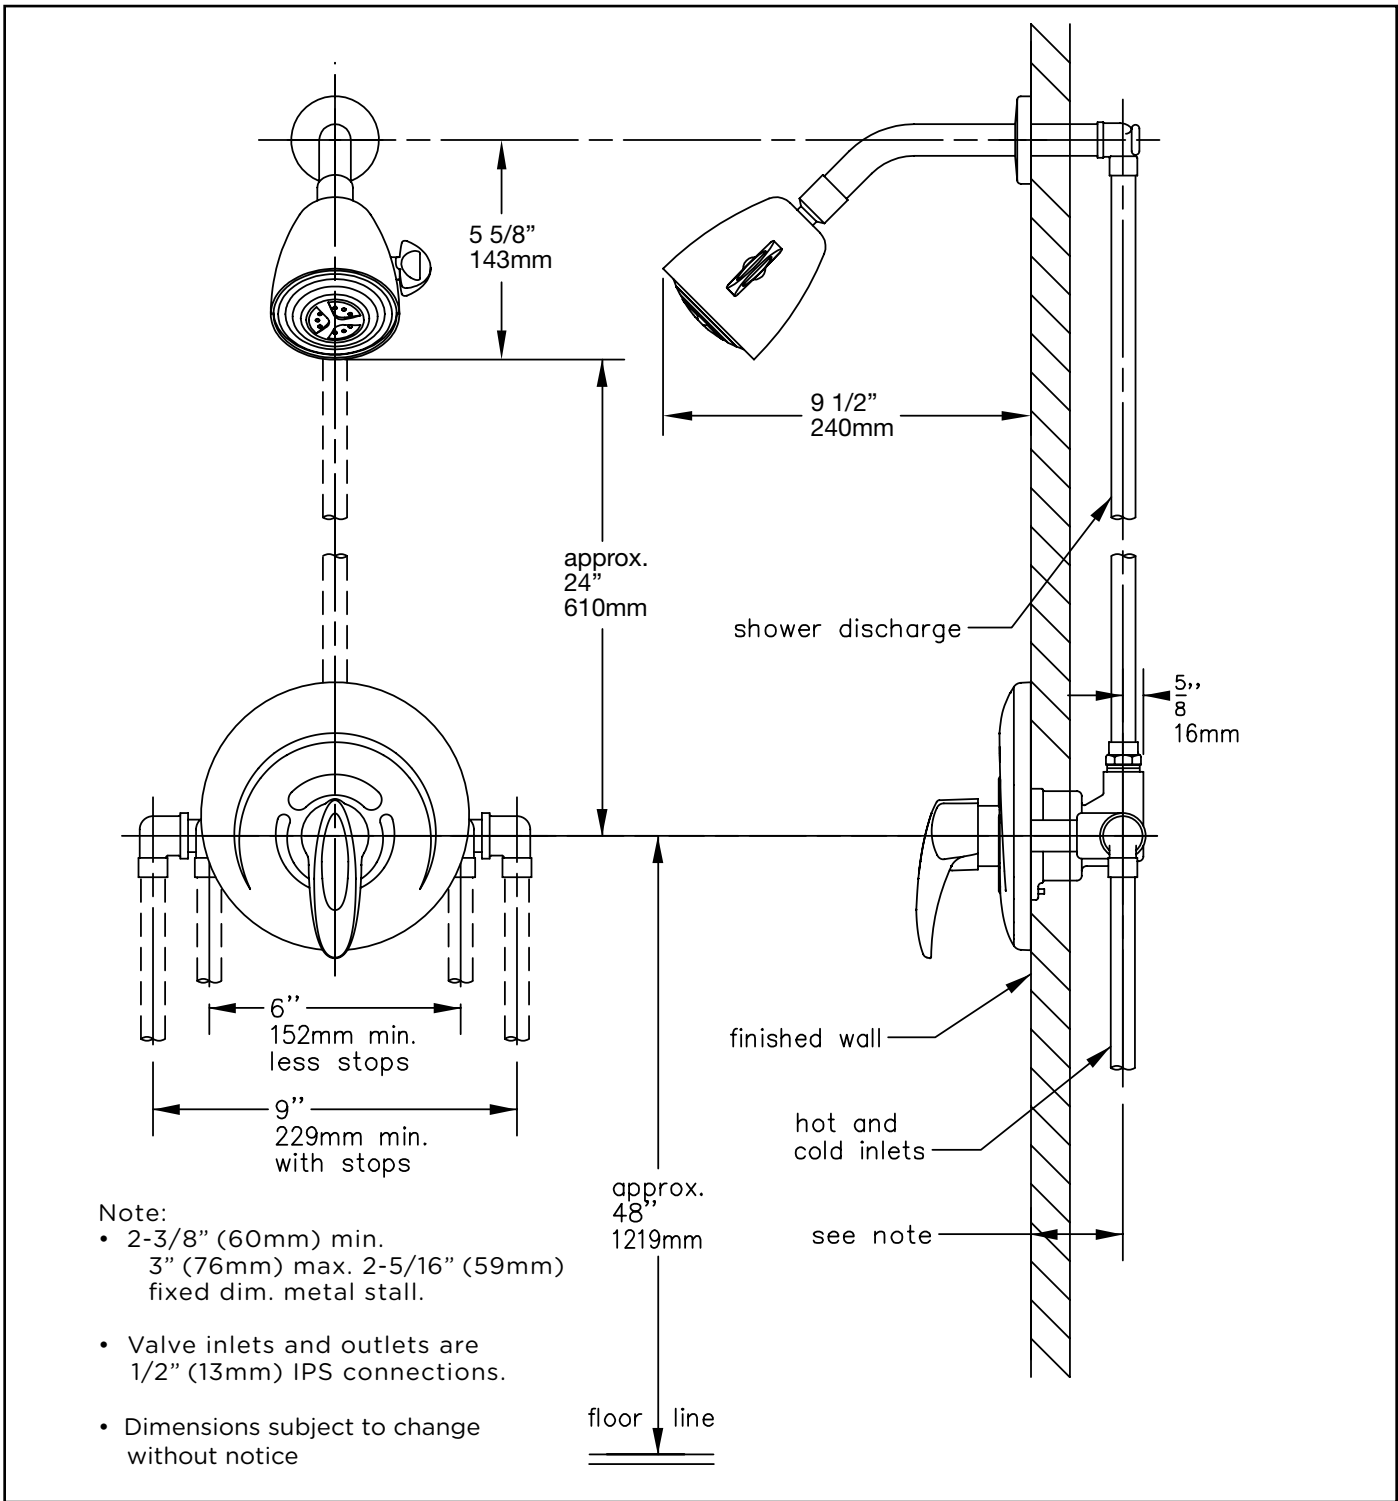

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
 Phone: (800) 796-6667 ■ Fax: (800) 961-9621  
 Website: symmons.com ■ Email: gethelp@symmons.com

Copyright © 2017 Symmons Industries, Inc. ■ ZV-1708 REV D ■ 041622

