

Features

- Can be installed to open to the left or right.
- Smooth, easy-to-clean wall jambs.
- Featuring ComforTrack™ Technology – a cushioned bottom track that allows for easier access to the showering space.

Material

- Anodized aluminum hardware prevents rusting or corrosion.

Installation

- Out-of-plumb adjustability allows for simpler installation.

Components

Additional included component/s: Hardware Kit.



Codes/Standards

ANSI Z97.1 (Tempered Glass)
CPSC 16CFR 1201


STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Color/Finishes


Color tiles intended for reference only.

Color	Code	Description
	ADR	Anodized Deep Bronze
	N	Nickel
	S	Silver

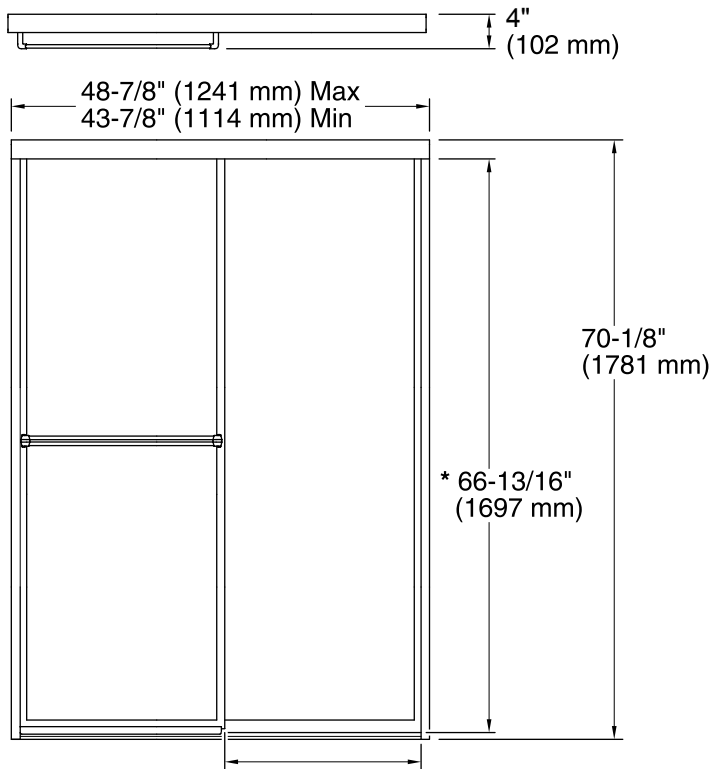

* 22-15/16" (583 mm) Max
* 20-7/16" (519 mm) Min

* Walk-Through

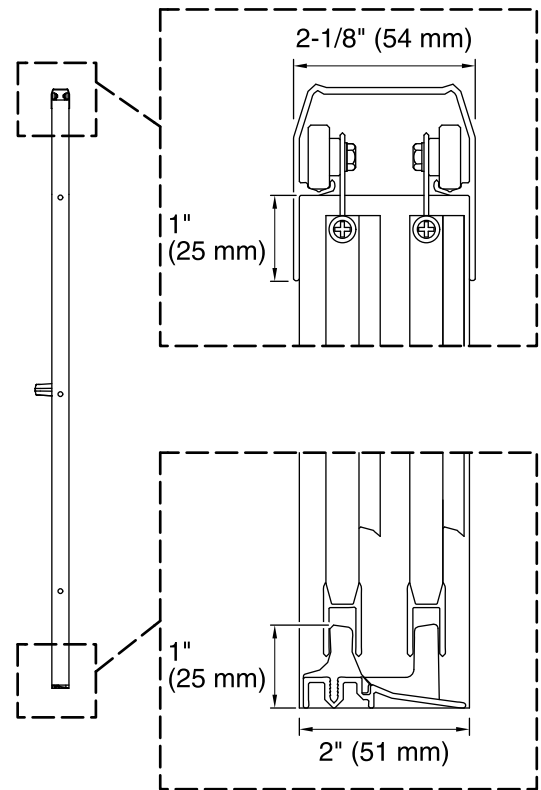

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Sliding/Bypass

Opening Width - Min: 43-7/8" (1114 mm)

Opening Width - Max: 48-7/8" (1241 mm)

Walk-through - Min: 20-7/16" (519 mm)

Walk-through - Max: 22-15/16" (583 mm)

Glass thickness: 3/16" (5 mm)

Notes

Install this product according to the installation guide.