


# PRODUCT SPECIFICATION DRAWING


## HOLDRITE® Stout Bracket® #SB1, #SB1S, #SB2 & #SB2S

### Adjustable length support system

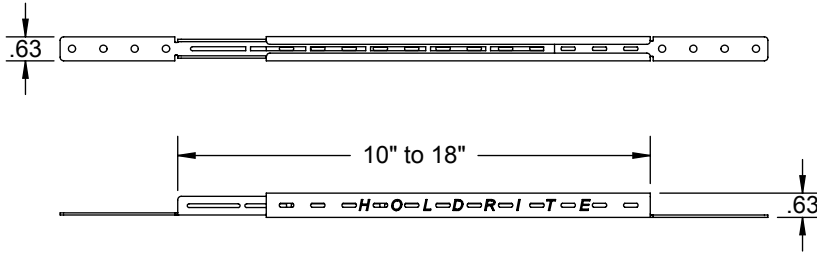

#### #SB1 / #SB1S

Beam Span Inches	Maximum Load (lbs.)	
	Center Pt.	Uniform Load
10	400	1150
14.5	164	300
18	104	131

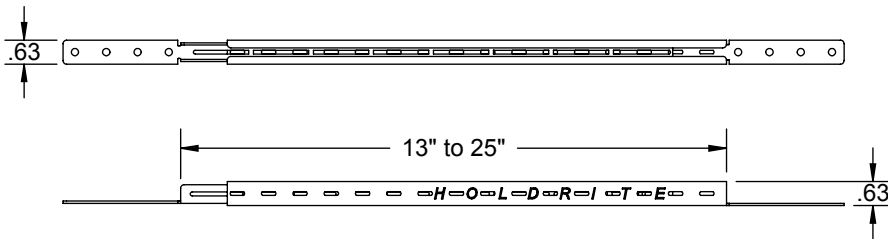

#### #SB2 / #SB2S

Beam Span Inches	Maximum Load (lbs.)	
	Center Pt.	Uniform Load
18	158	225
22.5	124	165
24	68	120

ALL DIMENSIONS IN INCHES

**Slot pattern permits wide versatility in positioning. Mount fittings, clamps, etc. vertically or horizontally. Use with high-ear or wing-ear fittings. Supports shower head, tub spout, piping, etc. Holds HOLDRITE Pro Clamp™, Stout Clamp™ and others. Attaches between studs, joists, etc. Bendable end tabs allow recessed or surface mounting. Use anywhere high strength is required.**

#### Product Information:

- Material: 16 gage CRS, galvanized per ASTM-A653, G90
- SB1S, SB2S series includes (4) #8 X 5/8" long self-drilling sheet metal screw with 1/4" X #2 phillips hex head
- UPC / IPC / IAPMO listed
- UL listing



THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.



CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONS<sup>SM</sup>  
800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM  
spec\_SB\_Series\_RevP

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	