

### Features

- Water-saving 1.0 gpf (3.8 lpf) flush valve uses 22% less water than 1.28 gpf (4.8 lpf) flush valves.
- 125-micron filter protects internal components.
- High back pressure vacuum breaker.
- Locking stop cap and nonhold open design provide protection against vandalism.
- No external flush volume adjustment ensures water conservation.
- Chloramine and chlorine resistance on all rubber components exposed to waterway.

### Material

- Brass construction with durable Polished Chrome finish.

### Technology

- Double seal handle design for long life without leaks.
- Patented piston technology for superior flush volume accuracy.
- Nonhold open piston technology for accurate activation.

### Installation

- For toilet installations with 1-1/2" top spud coupling connection.
- Can be installed for left- or right-handed users.

### Recommended Products/Accessories

K-23723 Faucet cleaner



ADA

CSA B651

OBC

### Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37  
EPA WaterSense®  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC


### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
-------------------------------------------------------------------------------------	----	-----------------

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

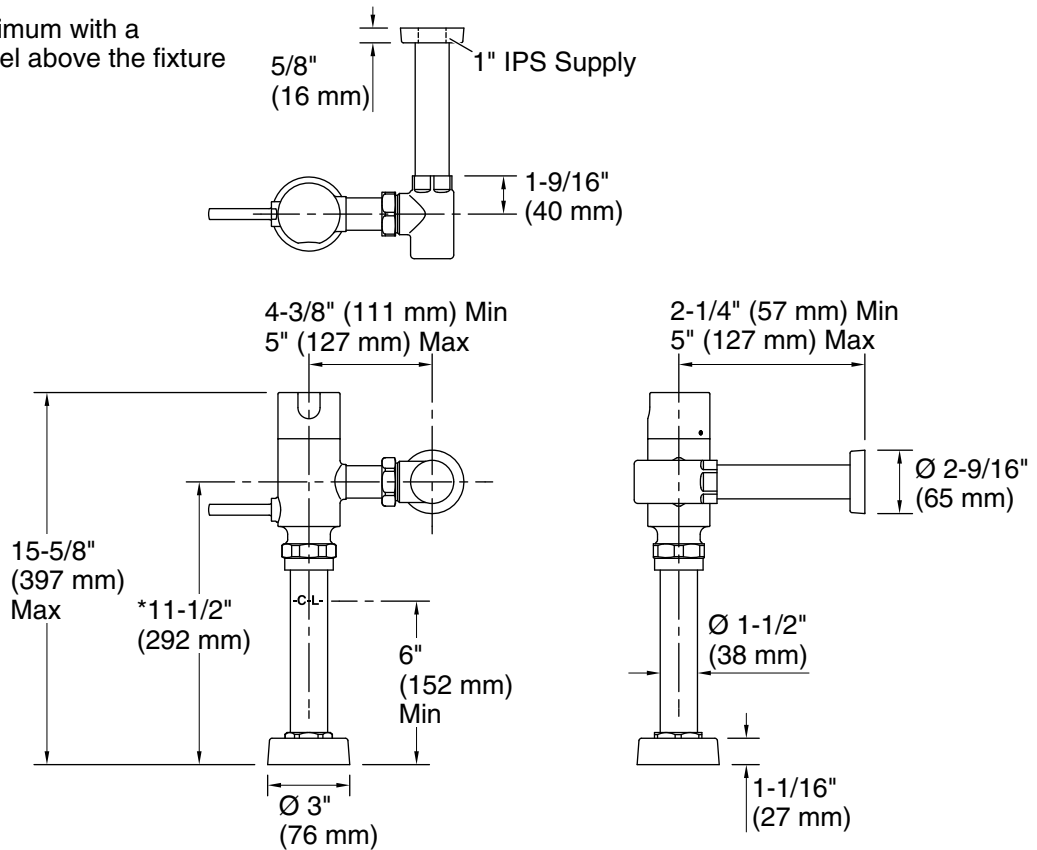

### Technical Information

All product dimensions are nominal.

Fixture pressure 80 psi (551.6 kPa)  
max (static):

### Pressure and Supply Requirements

Fixture pressure min 35 psi (241.3 kPa)  
(static):

### Fixture Supply Requirements

Min static pressure: 35 psi (241.3 kPa)  
Max static pressure: 80 psi (551.6 kPa)  
Min flowing pressure: 25 psi (172.4 kPa)  
Min flow rate: 25 gpm (94.6 lpm)

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.