

WASHING MACHINE OUTLET BOX

>> 696 SERIES

OxBox™

SPECIFICATION

Sioux Chief 696 series OxBox washing machine outlet boxes shall be used where necessary in plumbing supply/drainage systems. Unit shall allow for mounting with supply lines from top or bottom, on-stud or between-studs. Unit shall be available with ¼-turn valves with integral, slotted shut-offs. Boxes shall be UPC listed. Metal support bracket shall install into top track of box for between-stud configuration. Metal clip shall be installed on side slots of box in desired configuration. Drain box shall have a ⅝" integral testable nipple on knockout. Outlet connections shall be generally ¾"

MATERIALS

Outlet box: ABS

Frame: ABS

Arrester clip/valve platform: ABS

Bracket: galvanized steel

Box clip: galvanized steel


Arrester body: 304 stainless steel

Piston: polypropylene with two EPDM o-rings

Piston lubrication: Dow-Corning, 111 FDA approved silicone compound

Valve body: cast brass

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

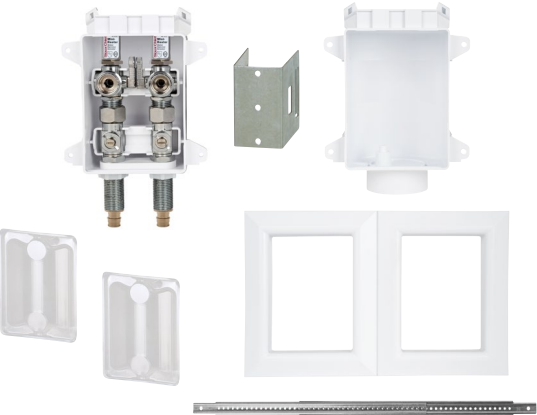

696-2333WGF

VALVE/ARRESTER WORKING LIMITS

Max working temperature: 250°F


Max testing air pressure: 100 PSIG

Max working/testing water pressure: 150 PSIG

DIMENSIONS

A: frame width	11½"
B: frame height	7¼"
C: frame opening width	3⅝"
D: frame opening height	5⅞"
E: rough-in box width	4" (single box) or 10" (double with clip)
F: rough-in box depth	3½"
G: rough-in box height	5½"
H: supply connection	½" nominal or 2" O.C.
I: drain connection	2" DWV
J: outlet connection	¾" male hose thread
K: test nipple	⅝" O.D.
L: secondary knockout	funnel ¹ accepts ½", ¾" or 1" pipe
M: bracket length	18"
N: bracket width	⅝"
bracket thickness	18 gauge

¹696-CF sold separately

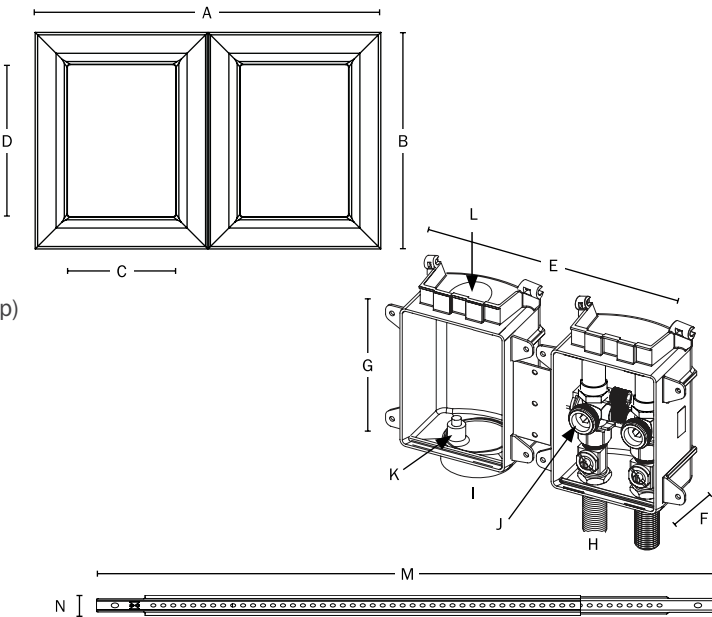

IPC 

Create Item Number

696-23A3BC

e.g. 695-2313MF: washing machine supply box, drain box, MIP/FSWT valve with arrester, packaged with frame

VALVES A

- 0 = Plain valves
- 1 = Valves with arresters
- 2 = Valves with integral slotted shut-offs
- 3 = Valves with integral slotted shut-offs with arresters

SUPPLY CONNECTION B

- M = MIP/FSWT
- C = CPVC
- X = PEX Crimp F1807
- W = PEX Grip F1960
- A = PEX Lock F2080

FRAME PACKAGING C

- F = Standard Pack (supply box, frame, bracket)
- R = Rough-in Pack* (supply box, bracket)
- *Order frame (696-2F) separately