DAYTON SPECIFICATIONS

GENERAL

Sink is formed of #20 gauge, type 300 series, nickel-bearing stainless steel. Top mount.

DESIGN FEATURES

Bowl Depth: 7" (178mm).

Coved Corners: 3" (76mm) vertical and 2-3/4" (70mm) horizontal radius. Rim Height: 3/16 " (5mm).

Finish: Exposed surfaces are polished to an Elite Satin finish.

Underside: Fully undercoated.

OTHER

Drain Opening: 3-1/2" (89mm).

OPTIONAL ACCESSORIES

Bottom Grid: GBG1415SS Cutting Board: CB1516 Drain: D1125


Sink complies with ASME A112.19.3/ CSA B45.4

Sinks are listed by IAPMO[®] as meeting the applicable requirements of the Uniform Plumbing Code[®], International Plumbing Code[®], and National Plumbing Code of Canada.

SINK DIMENSIONS


	Overall		Inside Each Bowl			Cutout in Countertop (1-1/2"(38mm) Radius Corners)	No. of 1-1/2"(38mm) Dia. Faucet Holes 4"(102mm) Center	Minimum Cabinet Size
	L	W	L	W	D	Use sink upside down	. ,	
DE21732	31-7/8 (810mm)	31-7/8 (810mm)	15-3/4 (400mm)	14 (356mm)	7 (178mm)	as a Template and cut 5/16" (8mm) inside sink outline.	3 or 4	36 (Corner) (914mm)

*Length is left to right. Width is front to back.

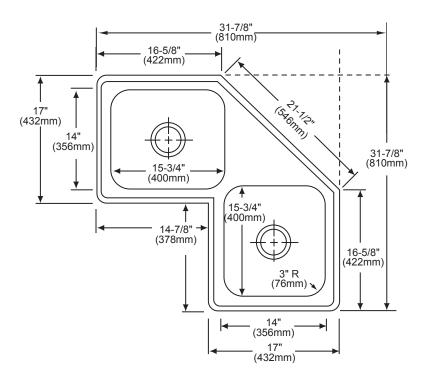


In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visti elkayusa.com for most current version of Elkay product specification sheets. Model DE217324





Hole Drilling Configurations 1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

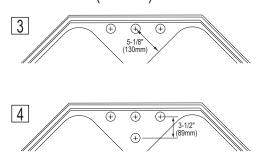

This specification describes an Elkay product with design, quality and functiona lbenefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.