

## Features

- Pressure-balancing diaphragm technology maintains outlet temperature within +/-3°F during water pressure fluctuations.
- Provides temperature regulation and automatic anti-scald protection.
- Single handle controls both on/off activation and temperature settings.
- Includes faceplate with ADA-compliant metal lever handle.
- Includes single-function 1.75 gpm (6.6 lpm) showerhead.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- Includes shower arm and flange.
- Coordinates with Hint™ bathroom sink faucets and bath faucets.

## Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.

## Installation

- Trim only; requires valve to complete installation (sold separately).

## Required Products/Accessories

- K-8304-K Valve Body & Cartridge Kit Complete  
or  
K-8304-KS Valve Body & Cartridge Kit Complete  
or  
K-8304-PS Valve Body & Cartridge Kit Complete  
or  
K-8304-PX Valve Body & Cartridge Kit Complete  
or  
K-8304-US Valve Body & Cartridge Kit Complete  
or  
K-8304-UX Valve Body & Cartridge Kit Complete  
or  
K-P8304-K Valve body and cartridge kit complete  
or  
K-P8304-KS Valve Body & Cartridge Kit Complete  
or  
K-P8304-SWX Valve Body & Cartridge Kit Complete  
or  
K-8300-K Valve Body Rough-In  
K-8305 Pressure Balance Cartridge  
or  
K-8300-KS Valve Body Rough-In  
K-8305 Pressure Balance Cartridge  
or  
K-8300-PX Valve Body Rough-In  
K-8305 Pressure Balance Cartridge



## Codes/Standards




ASME A112.18.1/CSA B125.1  
DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)


## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BL	Matte Black

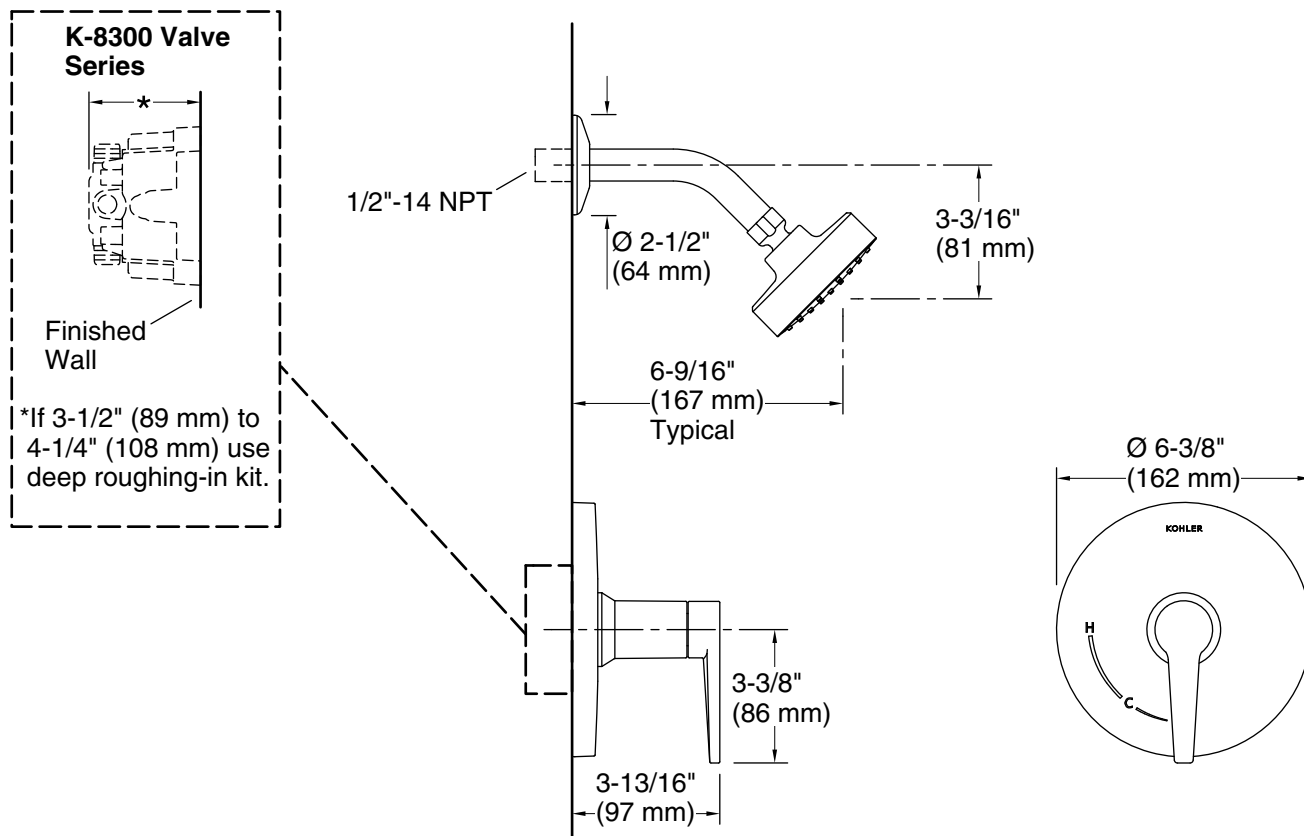

## Technical Information

All product dimensions are nominal.

Drain included: No

### Showerhead/Body Spray:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 80 psi (5.5 bar)

## Notes

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

Install this product according to the installation instructions.

**NOTICE:** Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit is needed.