

# LAV/SINK OUTLET BOX

696 SERIES

OxBox™

## SPECIFICATION

Sioux Chief 696 series OxBox lav/sink (two 3/8" comp. outlets) outlet box shall be used where necessary in plumbing supply systems. Box shall allow for mounting with supply lines from top or bottom, on-stud or between studs. Unit shall be available with plain valves or valves and water hammer arresters. Arresters shall be certified to ASSE 1010 and shall be UPC listed. Metal support bracket shall insert into top track of box for between stud configuration. Outlet connections shall be generally 3/8".

## MATERIALS

Outlet Box: ABS

Frame: ABS

Bracket: galvanized steel

Arrester body: stainless steel

Piston: polypropylene with two EPDM o-rings

Piston lubrication: Dow-Corning, 111 FDA approved silicone compound

Valve: chrome-plated forged brass

## VALVE/ARRESTER WORKING LIMITS

Max working temperature: 250°F

Max testing air pressure: 100 PSIG

Max working/testing water pressure: 250 PSIG

## DIMENSIONS

A: frame width	5 3/4"
B: frame height	7 1/4"
C: frame opening width	3 5/8"
D: frame opening height	5 1/8"
E: rough-in box inner width	4"
F: rough-in box overall depth	3 1/2"
G: rough-in box inner height	5 1/2"
H: supply connections	1/2" nominal (see 'C' below)
I: outlet connections	3/8" compression
J: bracket length	18"
K: bracket width	5/8"


## CERTIFICATIONS/APPROVALS

Listed by UPC/IAPMO to meet UPC


Conforms to IPC

Valves meet ASME A112.18.1

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

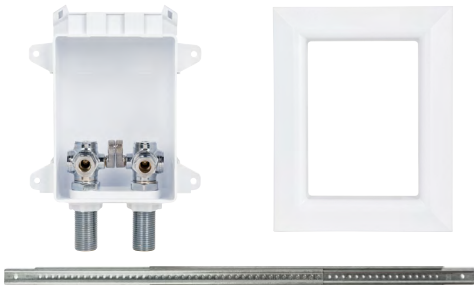

696-2001MF

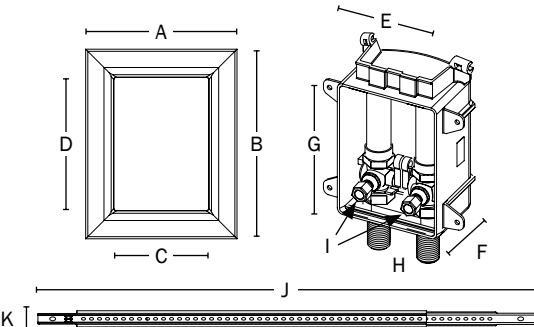

## Create Item Number

### 696-G20A1BC

e.g. 696-G2011MF: lav/sink box, female sweat valves with arresters, packaged with frame

#### ARRESTER A

0 = no arrester  
1 = with arrester

#### SUPPLY CONNECTION B

M = 1/2" female sweat  
C = 1/2" male CPVC  
X = 1/2" PEX Crimp F1807  
W = 1/2" PEX Grip F1960  
V = 1/2" Viega PureFlow® PEX  
A = 1/2" PEX Lock F2080

#### FRAME PACKAGING C

F = standard pack (supply box, frame, bracket, debris cover)  
R = rough-in pack<sup>2</sup> (supply box, bracket, debris cover)

<sup>1</sup>Compliant with NSF-372 and California No Lead Plumbing Law

<sup>2</sup>Order frame (696-1F) separately