

TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 865 Series HDPE slotted grating shall be used where necessary with FastTrack trench drain channels. Grating shall be approved for use in light-duty applications and walkways for pedestrian traffic. Grating shall be lightweight, durable, and U.V./chemical resistant. Grating shall have large, open slots for increased flow capacity into channel and fasten to anchors with screws.

ADA: No

Heel-Proof: No*

Load Rating:

DIN EN 1433: Class A15

ASME A112.6.3: Light Duty

MATERIALS

Grate: High-density polyethylene

Screws: Stainless steel


FREE-AREA

81.4 in²

DIMENSIONS

A: Length	36"
B: Width	6"
C: Thickness	1 ⁷ / ₁₆ "
D: Slot length	5"
E: Slot opening	⁷ / ₁₆ "

* Per ASME A112.6.3 requirements

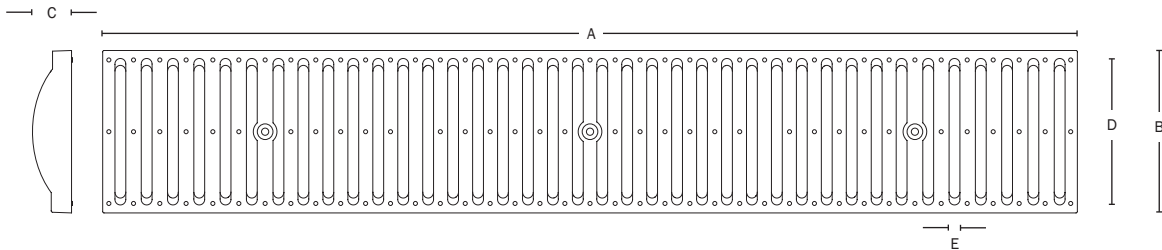

Item Number

865-GHS