



SUBMITTAL DATA SHEET

AHU Heat Pump System	
Location: _____ Engineer: _____ Submitted to: _____ Submitted by: _____ Reference: _____	Approval: _____ Date: _____ Construction: _____ Unit #: _____ Drawing #: _____

Set Model	Indoor unit model: CCOXHAAH24V60 Outdoor unit model: CCOXHA24V60P
Certified	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> AHRI </div> <div style="text-align: center;"> UL LISTED </div> <div style="text-align: center;"> ENERGY STAR </div> </div>



SYSTEM PERFORMANCE DATA		
Power supply		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
Electrical		
Minimum circuit ampacity(Outdoor)	(A)	42.0
Max.fuse(Outdoor)	(A)	60.0
Connection wiring		14AWG*2 Stranded, shielded
Cooling		
Capacity	(Btu/h)	55000(14000~56000)
Power Input	(W)	6280(500~6450)
Current	(A)	27.4(3.9~28.5)
SEER2	(Btu/W)	15.3
EER2	(Btu/W)	8.8
Heating		
Capacity	(Btu/h)	59000(13400~69000)
Power Input	(W)	5060(750~5890)
Current	(A)	22(5.5~26.2)
HSPF2-4	(Btu/W)	9.4
HSPF2-5	(Btu/W)	7.6
COP	W/W	3.42
Heat at 17F(H32)	(Btu/h)	42000
Heat at 5F(H42)	(Btu/h)	48500
COP at 5F(H42)	W/W	1.91


INDOOR UNIT DATA		
Indoor fan motor		
Model		ZKFD-750-8-1-1
Qty		1
Input	(W)	/
Output	(W)	/
RLA	(A)	7.0
Speed(Hi/Mi/Lo)	(r/min)	/
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	05.88/1582.35/1358.82/1135.29
Indoor noise level (Hi/Med/Lo)	[dB(A)]	51/45.5/41.5
Dehumidification	(L/H)	5.55
Indoor unit		
Dimension (WxDxH)	(inch)	21.02x24.49x52.99
Packing(WxDxH)	(inch)	27.95x26.77x56.50
Net/Gross weight	(lbs.)	162.70/192.90

REFRIGERANT PIPE DATA		
Throttle type	Indoor unit	EEV for cooling
	Outdoor unit	EEV for heating
Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	169.31
Refrigerant precharge	(ft)	25.0
Additional charge for each ft	(oz/ft)	0.69
Liquid side/ Gas side(indoor)	(inch)	3/8" / 7/8"
Liquid side/ Gas side(outdoor)	(inch)	3/8" / 7/8"
Max. pipe length	(ft)	213.3
Max. difference in level	(ft)	98.4
Connection method		Flared
Indoor(cooling)	(Deg. °F)	60~90
Indoor(heating)	(Deg. °F)	32~86
Outdoor(cooling)	(Deg. °F)	5~122
Outdoor(heating)	(Deg. °F)	-22~75

OUTDOOR UNIT DATA		
Compressor		
Type		ROTARY
Model		EAPQ440D1UMUA
Brand		GMCC
Capacity	(Btu/h)	46335
Input	(W)	3770
Rated current (RLA)	(A)	26.2
Refrigerant oil/oil charge	(ml)	POE.VG75/1300
Outdoor fan motor		
Model		ZKFN-85-8-22-5
Qty		2
Input	(W)	126.0
Output	(W)	85
RLA	(A)	1.2
Speed	(r/min)	850/750/650
Air flow & Noise level		
Outdoor air flow (Max.)	(CFM)	4500
Outdoor noise level	[dB(A)]	63.5
Outdoor unit		
Dimension (WxDxH)	(inch)	37.48x16.34x52.48
Packing (WxDxH)	(inch)	43.11x19.49x58.27
Net/ Gross weight	(lbs.)	239.86/271.61


Accessories		
Adaptor for welding(3/4")	Qty	1 Indoor & 1 Outdoor
Adaptor for welding(3/8")	Qty	2 Indoor & 1 Outdoor
Adaptor (5/8" to 3/4")	Qty	1 Indoor

Indoor unit dimension

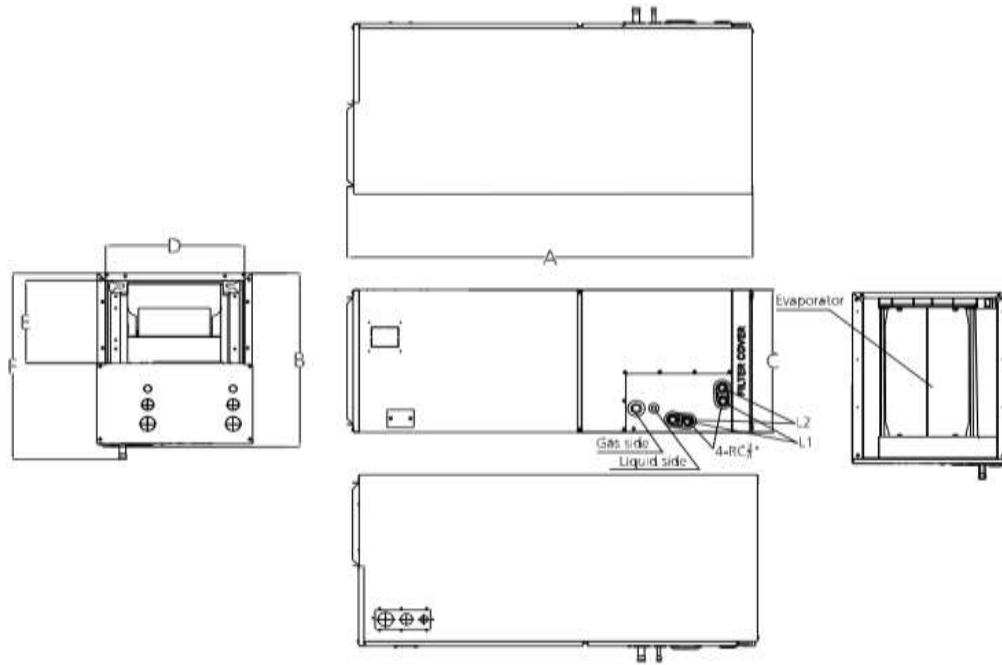

Model	Unit	Dimensions(mm)						Drain hole	
		A	B	C	D	E	F	L1	L2
18k-24k	mm	1143	534	445	400	260	585	Main drain	Overflow drain
	inch	45	21	17-1/2	15-3/4	10-1/4	23		
30k-48k	mm	1245	534	534	490	260	585		
	inch	49	21	21	19-5/16	10-1/4	23		
60k	mm	1346	534	622	580	260	585		
	inch	53	21	24-1/2	22-7/8	10-1/4	23		

Outdoor unit dimension

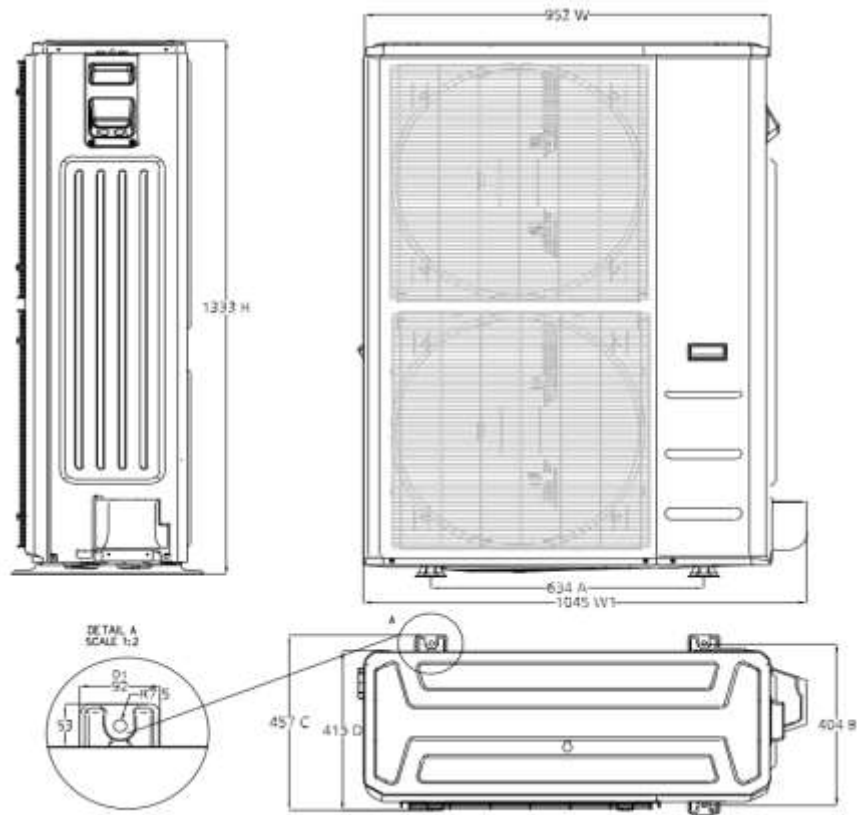

Fan performance

