


# BIS RapidRail® Fixing Rail

suspension and support

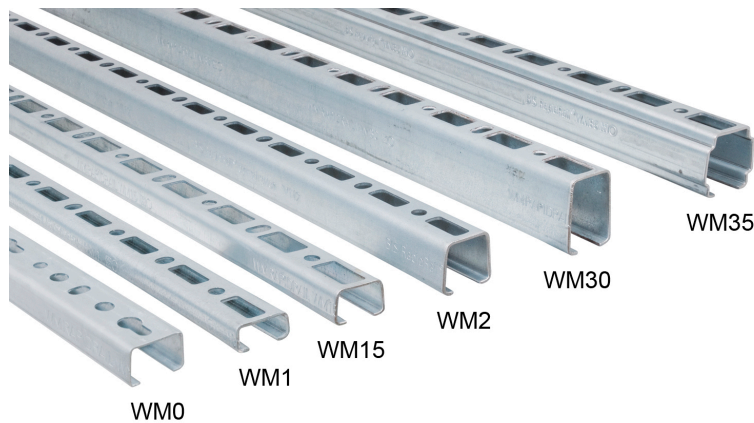

## Features and benefits



- C-profile
- for quick and easy fixing
- with continuous perforation
- distance between rail end and first hole is always equal
- continuous graduated centimeter scale on one side
- unique perforation on WM15, WM30 and WM35 rail allows for hanging on both sides
- material: steel 1.0242
- yield stress 34,809 pounds/square inch
- pre-galvanized
- for more information about the max. allowed load (Fa,z) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'



RAL-GZ 655/C  
Cert.Nr. 2012-03

Part No.	Type	L	B (")	H (")	S (")	s (Ga)	RAL	BndS	BndL
6505 9 502	WM15	10"	1 3/16	3/4	5/8	16	-	20	-
6505 9 505	WM15	20"	1 3/16	3/4	5/8	16	-	10	-
6505 9 510	WM15	3' 3"	1 3/16	3/4	5/8	16	-	10	-
650 5 015	WM15	6' 6"	1 3/16	3/4	5/8	16	RAL <sup>1</sup>	10	240

For more information about the max. allowed load (Fa,z) please refer to the loading tables.

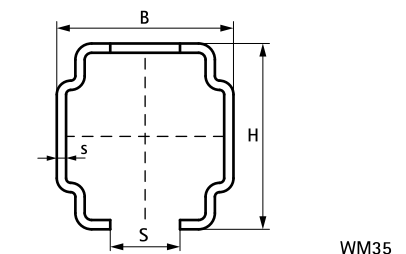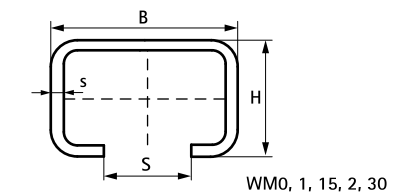

## Complementary

- BIS RapidRail® Connectors 90°
- BIS RapidRail® Connectors 135°
- BIS Rail End Caps