


## **E-Z Connect** ADAPTOR FITTING

One fitting quickly connects the 1/4"-NPT male end of flexible oil lines to 3/8" FLARE!

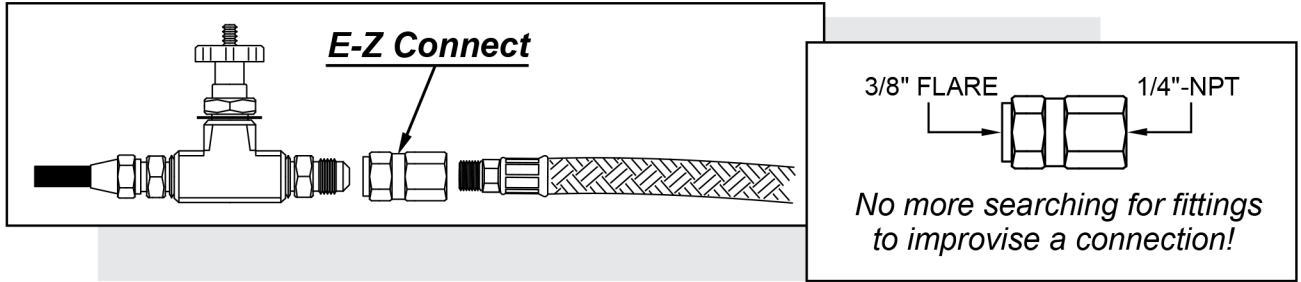

S220-50

## OIL LINE SAFETY VALVES

Isolates burner components from fuel supply line pressure.  
Requires pump vacuum to draw oil from the tank.

### Webster by SUNTEC **OSV** Oil Safety Valve



S227



#### Technical Information

MAXIMUM FLOW . . . . . 70 GPH  
TEMPERATURE RANGE . . . . -40 - 140° F  
MAX. INLET PRESSURE . . . . . 60 PSI  
FUEL . . . . No. 2 OR LIGHTER UP TO B100  
APPROVAL . . . . . UL LISTED  
CONNECTIONS . . . . . 3/8"- NPTF

### Tigerholm

AN SPX BRAND

#### Tigerstop™ Anti-siphon valve

Adjustable for heights  
up to 13 ft.



S224-2

#### Technical Information

MAXIMUM FLOW  
at 0.58 PSI pressure loss . . . . . 52.8 GPH  
MAX TEMPERATURE . . . . . 104° F  
MAX. INLET PRESSURE . . . . . 87 PSI  
FUEL . biofuels to B20, No.1 & 2 Heating Oil  
CONNECTIONS . . . . . 3/8"- NPT  
Height . . . . . adjustable to 13 ft

