

# Compression wall seal

## Project Information


|                                |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Date submitted: |
| Contractor:                    | Submitted by:   |
| Manufacturer's representative: | Approved by:    |

## Technical data

|                         |        |
|-------------------------|--------|
| Material                | Rubber |
| Prop 65 label required? | Yes    |

## Product Information and application use

Ecoflex® compression wall seals can be used with wall sleeves, or can be used alone where a field core drill is preferred. It creates a watertight seal between the core drill surface and the outer jacket of Ecoflex piping.

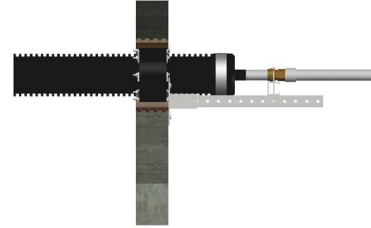

| Part name                             | Part no. | Inner diameter pipe [Inch] | Outer diameter pipe [Inch] | Weight per UOM [lbs/UOM] |
|---------------------------------------|----------|----------------------------|----------------------------|--------------------------|
| Compression Wall Seal for 2.7" Jacket | 1007358  | 2.7559                     | 4.7638                     | 2.6                      |
| Compression Wall Seal for 5.5" Jacket | 1007360  | 5.5118                     | 7.874                      | 5.1                      |
| Compression Wall Seal for 6.9" Jacket | 1007361  | 6.9685                     | 9.7638                     | 7.8                      |
| Compression Wall Seal for 7.9" Jacket | 1007362  | 7.9528                     | 9.8819                     | 6.1                      |

## Installation

For new concrete walls, install over the pipe and Ecoflex compression wall seals into the wall sleeve for a watertight seal. For an existing wall with a field core drill, install between core drill surface and outer jacket of the Ecoflex pipe. Refer to the Uponor Pre-insulated Pipe Systems Design and Installation Manual for more information.

## Related applications

- Pre-Insulated Pipe Systems
- Radiant Heating and Cooling Systems
- Permafrost Protection Systems
- Turf Conditioning Systems

## Codes

## Standards

## Listings

## Notes

- Core Drill OD - 4.75"
- Core Drill OD - 8"
- Core Drill OD - 10"

## Footnotes

## Contact information

|   |  |  |
|---|--|--|
| - | <p>Uponor Inc.<br/>5925 148th Street West<br/>Apple Valley, MN 55124<br/>T 800.321.4739<br/>F 952.891.2008</p> | <p>Uponor Ltd.<br/>6510 Kennedy Road<br/>Mississauga, ON L5T 2X4<br/>T 888.594.7726<br/>F 800.638.9517</p> |
|---|--|--|