


Pumpsaver® SMP (Flanged Ends)

Flex-Hose Co.'s PUMPSAVER SMP style has 150 lb. plate carbon steel flanges, 321 stainless steel corrugated hose, and single stainless steel braid.

Larger sizes up to 30" ID are available with special order. Also available with 300 lb., 600 lb., concentric reducing, DIN flanges and multiple braids for higher pressures.

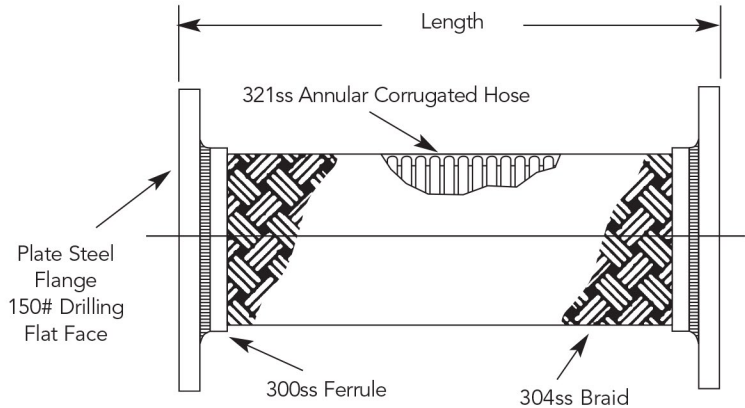

NSF/ANSI 61,
California low lead law
and NSF/ANSI 372
third party listed
by IAPMO R&T

This product is listed by IAPMO R&T under file #N-7208 for NSF/ANSI 61 and file 7207 for California Lead Plumbing Law. Our listed products can be viewed on IAPMO R&T's Web listing at <http://pld.iapmo.org>



*For definition of motion classifications, see page 4.



CSA standard B51 certified. Inspected and tested by the Technical Standards and Safety Authority of Canada.

U.S.

I.D. (In.)	Length (In.)	Pressure (PSI) 70°F	Parallel Offset* (In.) Permanent	Parallel Offset* (In.) Intermittent	Weight (lb)
2.00	9.00	500	1 1/2	3/8	10.00
2.50	9.00	385	1	3/8	12.00
3.00	9.00	285	3/4	1/4	14.00
4.00	9.00	230	1/2	1/4	19.00
5.00	11.00	190	3/4	3/8	25.00
6.00	11.00	165	3/4	1/4	30.00
8.00	12.00	180	1	1/2	54.00
10.00	13.00	170	1/2	1/4	75.00
12.00	14.00	145	1/2	1/4	105.00
14.00	14.00	110	3/4	1/8	135.00

METRIC

I.D. (mm)	Length (mm)	Pressure (kPa) 20°C	Parallel Offset* (mm) Permanent	Parallel Offset* (mm) Intermittent	Weight (kg)
50	225	3445	28.57	9.52	4.60
65	225	2650	25.40	9.52	5.50
80	225	1965	15.87	6.35	6.50
100	225	1585	12.70	6.35	9.00
125	280	1310	19.05	9.52	11.50
150	280	1135	15.87	6.35	14.00
200	300	1240	12.70	6.35	24.50
250	330	1170	12.70	6.35	34.50
300	350	1000	12.70	6.35	48.00
350	350	755	9.52	3.17	61.50

PUMPSAVER are designed to be pressure tested 1.5 times their maximum rated working pressure and manufactured with a 4:1 safety factor.



Standard sizes 2" to 14" I.D.
Other alloys & sizes available on request.

Toll Free 1-877-874-3539

