

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

CS600 Copper Faucet Riser – One-Piece Riser w/ Shank Nut and Sweat Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- **One-piece construction**
- **100% Compliant** to California and Vermont “low-lead” requirements

Operating Specifications:

Temperature: 40° - 180° F
Pressure: 125 psi maximum

Tubing Diameter: 0.38” O.D.




MATERIAL SPECIFICATIONS			
Tube	C12200 copper per ASTM B-68		
Shank Nut	C36000 brass		
PART DIMENSIONS (Inches)			
Model	DIM. A	DIA. B (I.D.)	DIM. C
CS600	11.50	.630	.62

Part Listing:

- CS600 R 1/2” Nom Sweat x 3/8” OD Tube x 11-1/2” Length, rough finish
- CS600 RBT 1/2” Nom Sweat x 3/8” OD Tube x 11-1/2” Length, rough finish, plain label, bulk

Listings & Certifications:

- IAPMO listed to ASME A112.18.1-2005 / CSA B125.1-2005 (File # 0645)
- CSA approved to California Health & Safety Code 116875 and Vermont Bill S.152 (Project # 2174785)

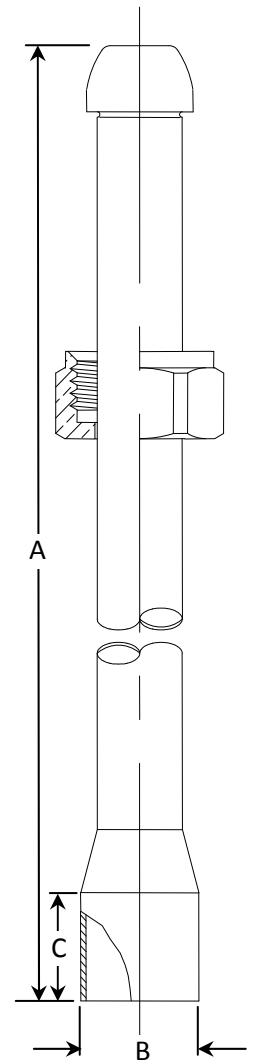

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®