




CASSETTE



COMPACT DESIGN

Slim design with body thickness of 8.5 inches (215mm) and the installation thickness of 9.6 inches (245mm) reducing the ceiling height requirement.

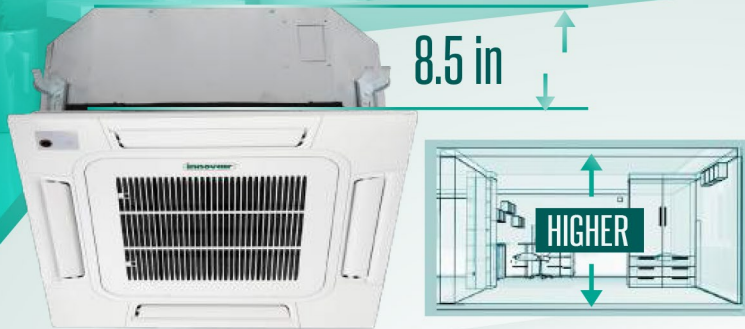

360° Round Flow

360° Round Flow offers optimum efficiency and comfort with a full-flat panel and micro-channel design allowing smooth air supply.



FRESH AIR INTAKE

Fresh air intake introduces outdoor fresh air into the room to improve air quality.

Model Name		VCM10H7F7	VCM13H7F7	VCM18H7F7	VCM24H7F7
Cooling capacity	Btu/h	9000	12000	18000	24000
Heating capacity	Btu/h	10200	13500	19000	27000
Power	V/Hz/Ph	208/230 50/60 1	208/230 50/60 1	208/230 50/60 1	208/230 50/60 1
Output power	W	57	57	80	80
Rated current	A	0,25	0,25	0.40	0.40
Anti electric shock		Class I	Class I	Class I	Class I
Degrees of protection		IPX4	IPX4	IPX4	IPX4
Air flow	CFM	306	353	559	647
Noise Level (Sound Pressure)	dB(A)	38/34/31	42/37/33	38/36/34	44/40/38
Net Body Dimension (WxHxD)	inch	22 7/16 x 8 7/16 x 22 7/16	22 7/16 x 8 7/16 x 22 7/16	33 x 9 3/4 x 33	33 x 9 3/4 x 33
Net Panel Dimensions (WxHxD)	inch	24 1/2 x 1 5/8 x 24 1/2	24 1/2 x 1 5/8 x 24 1/2	37 1/2 x 1 3/4 x 37 1/2	37 1/2 x 1 3/4 x 37 1/2
Package Dimension (WxHxD)	inch	28 3/4 x 11 1/2 x 26 5/16	28 3/4 x 11 1/2 x 26 5/16	39 1/4 x 37 1/16 x 14 9/16	39 1/4 x 37 1/16 x 14 9/16
Net/Gross Body Weight	lbs	32.0 / 38.5	34.0 / 40.5	56.0 / 74.0	59.5 / 79.5
Diameter(Liquid)	inch	1/4	1/4	1/4	3/8
Diameter(Gas)	inch	3/8	3/8	1/2	5/8