



# Standard Filter Housing

## Features

- LF brass threaded port
- Built-in manual bleed valve bottom
- Top seated O-Ring gasket
- Accepts most standard 10" cartridges
- Fast cartridge replacement

## Specification

- Max pressure : 125 psi
- Operating temperature : 40°F (4°C)~100°F (38°C)



FDA CFR-21 compliant materials


## Clear Standard Housing

| PART NO.  | SIZE | PORT              | SUMP  | CAP   | CASE QTY |
|-----------|------|-------------------|-------|-------|----------|
| 4PRO34SFH | 10"  | LF BRASS 3/4" NPT | CLEAR | BLACK | 12       |
| 4PRO1SFH  | 10"  | LF BRASS 1" NPT   | CLEAR | BLACK | 12       |

Complete with black cap(PP), clear sump(AS), O-Ring(silicone), plastic wrench, plastic bracket, mounting screws and anchors.

## Specification

Silicone O-Ring for 4PRO34SFH and 4PRO1SFH standard filter housing

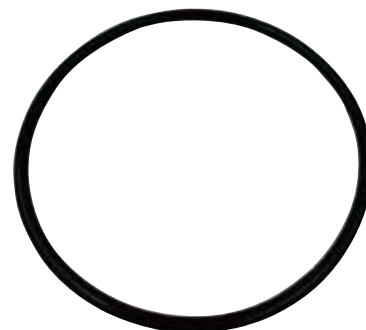

FDA CFR-21 compliant materials

4PROSOR

### ▲WARNING

Do not use where the water is microbiologically unsafe or quality without adequate disinfection before or after the unit.