




Energy Efficient & Continuous Hot Water

Bosch Greentherm 9000 Series

The Bosch Greentherm 9000 Series brings homeowners more than endless hot water. It saves time, money, space and unnecessary stress. From its gorgeous exterior to the sophisticated technology on the inside, Bosch Greentherm water heaters are designed to impress. They deliver ultra efficient endless hot water and has features never seen on a water heater before.

Features

- ▶ Space-saving, state-of-the-art tankless design
- ▶ Ultra efficient with UEF ratings up to 0.96 
- ▶ Auto-tuning for optimal performance
- ▶ High resolution color LCD interface
- ▶ Wi-Fi accessory & App increases functionality
- ▶ Ability to control external pumps
- ▶ Industry leading 22:1 turn down ratio
- ▶ 60ft venting using 2" pipe
- ▶ Ultra Low NOx Certified
- ▶ Integrated freeze protection
- ▶ Stainless Steel condensing heat exchanger



T9800 SE Outdoor

Designed for outdoor conditions

No vent pipes necessary

Included LP conversion kit

T9800/9900 SE Indoor

Top water connections for easy tank replacement

Integrated flush ports

Included LP conversion kit

T9900i SE Indoor

All the benefits of the T9800/9900 + Built-in WiFi


Recirculation pump on-board

Durable glass front cover

Designed For An Easy Install

Built For Comfort Inside & Out

With top water connections, a built-in recirculation pump, WiFi, auto-tuning, and a sleek design, the Greentherm 9000 Series is designed for ultimate ease of installation and use.

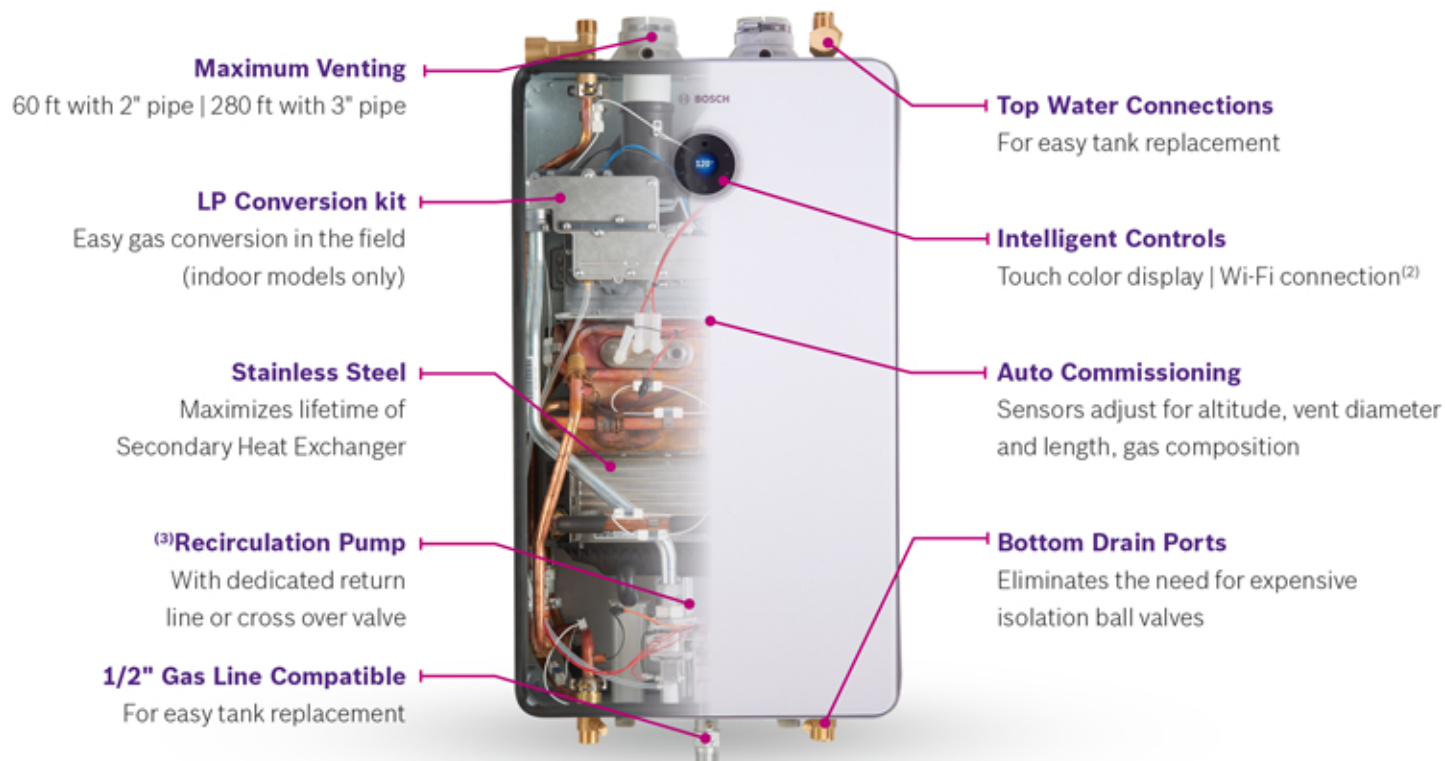

T9900i SE Pictured Above

Greentherm 9000 Series							
Technical Specifications	T9900i SE 199	T9900 SE 199	T9900 SE 160	T9800 SE 199	T9800 SE 160	T9800 SEO 199	T9800 SEO 160
Part Number	7736503732	7736503731	7736503730	7736503581	7736503725	7736503727	7736503726
NG Min-Max Input (kBtu)	9-199	9-199	9-160	9-199	9-160	9-199	9-160
Uniform Energy Factor	0.96	0.96	0.92	0.96	0.92	0.96	0.92
Dimension (WxHxD)	18 ⁹ / ₁₆ " x 31 ¹ / ₂ " x 9 ¹³ / ₁₆ "						
Temperature Range	100-140 °F						
Temperature Stability	+/-2 °F						
Max Flow Rate at 35°F (GPM)	11.2	9	11.2	9	11.2	9	9
Activation Water Flow Rate	0.45 GPM						
Required NG Pressure	3.5" - 10.5"						
Required LPG Pressure	8" - 13"					N/A	N/A
Recirculation Pump	✓	✓	✓	-	-	-	-
Electrical Requirements	120 VAC 60Hz						
Noise Level	<57 dB						
Max Flue Length	Twin Pipe	2": 60ft + 60ft; 3": 280ft + 280ft					
	Concentric Pipe	2"/4": 60ft; 3"/5": 280ft					

Wi-Fi Connection

The Greentherm 9000 app allows you to remotely control the water temp, activate the recirculation pump, and monitor usage and sensor values.



(2) WiFi connectivity can be built-in or optional. (3) Integrated pump only on T9900 models (4) Glass cover only on T9900i model